



Absolutely The Best Crane Mats In The World.

This document is stored and available in the Raptor Tech Technical Document Repository.


To help our customers understand certain critical data points that factor into purchasing crane mats, Raptor Tech maintains a repository of technical documents with data from all major crane manufacturers.

You can visit Raptor Tech's repository to get crane specifications and technical details for crane models in addition to this model at:

<https://library.steelcranemats.com>


Thank You for Visiting the [SteelCraneMats.com](https://library.steelcranemats.com) Technical Specifications Document Repository.


AC 100-4 (L)

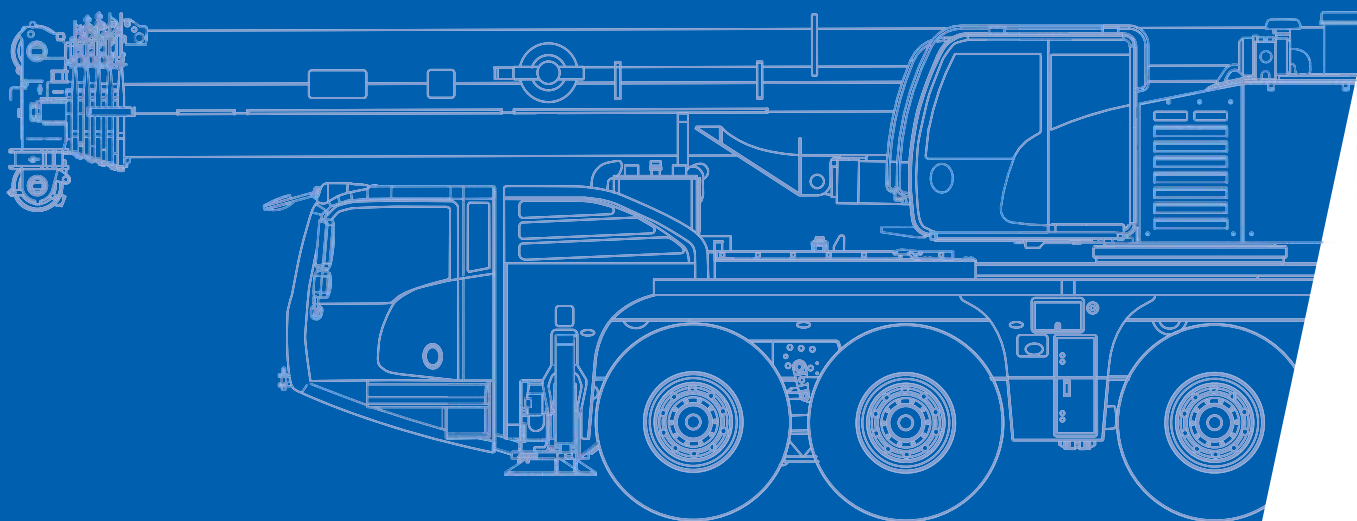



**All Terrain Crane
120 USt Capacity class**

	Page:
Dimensions.....	4
Specifications.....	6
Equipment.....	7
Counterweight	8

	HA (HA50, HA60) Main boom.....	10
---	--	----


	HAV (HA50, HA60) Folding swing-away jib	22
---	---	----

	HAV-VA (HA50, HA60) Variable extension with swing-away jib.....	34
---	---	----

	MS (HA50, HA60) Runner	56
---	--	----

Technical description.....	64
----------------------------	----


	Counterweight		Slewing
	Lifting capacities on outriggers · 360°		Boom telescoping
	Radius		Boom elevation
	Main boom		Working speeds
	Folding swing-away jib		Max. line pull
	Runner		Rope diameter
	Adapter		Rope length
	Max. axle loads		Hook block (capacity-sheaves-rope diameter)
	Mechanism		Number of lines
	Tires		Possible load of hook block
	Hook block		Weight of hook block
	Hoist		Distance head sheave axle – hook ground
	Dolly		Number of sheaves in boom head
	Travel speed		Supporting force
	Gradeability – road		Length of stroke (support cylinders)
	Gradeability – off road		Additional parts for hydraulic system

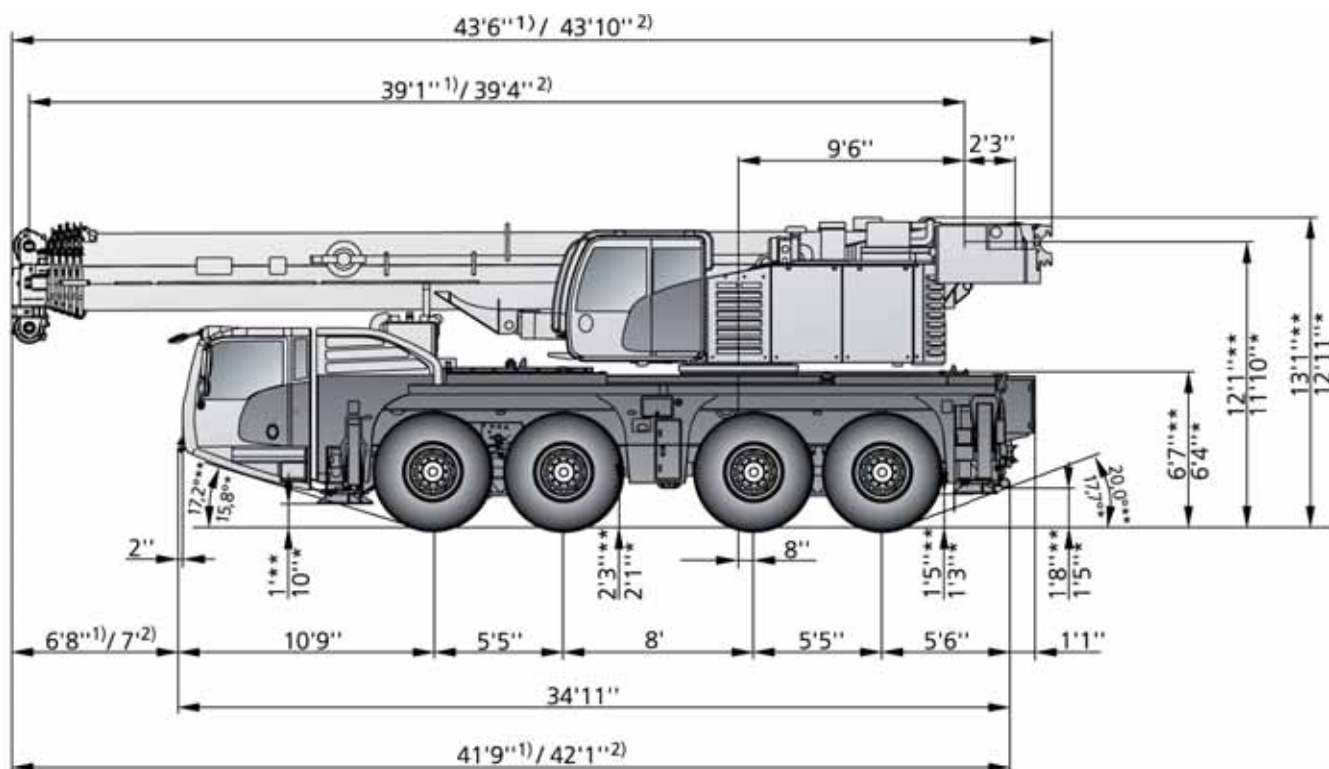

1) 164.4 ft 2) 194.9 ft

* 385/95 R25

** 445/95 R25 / 525/80 R25

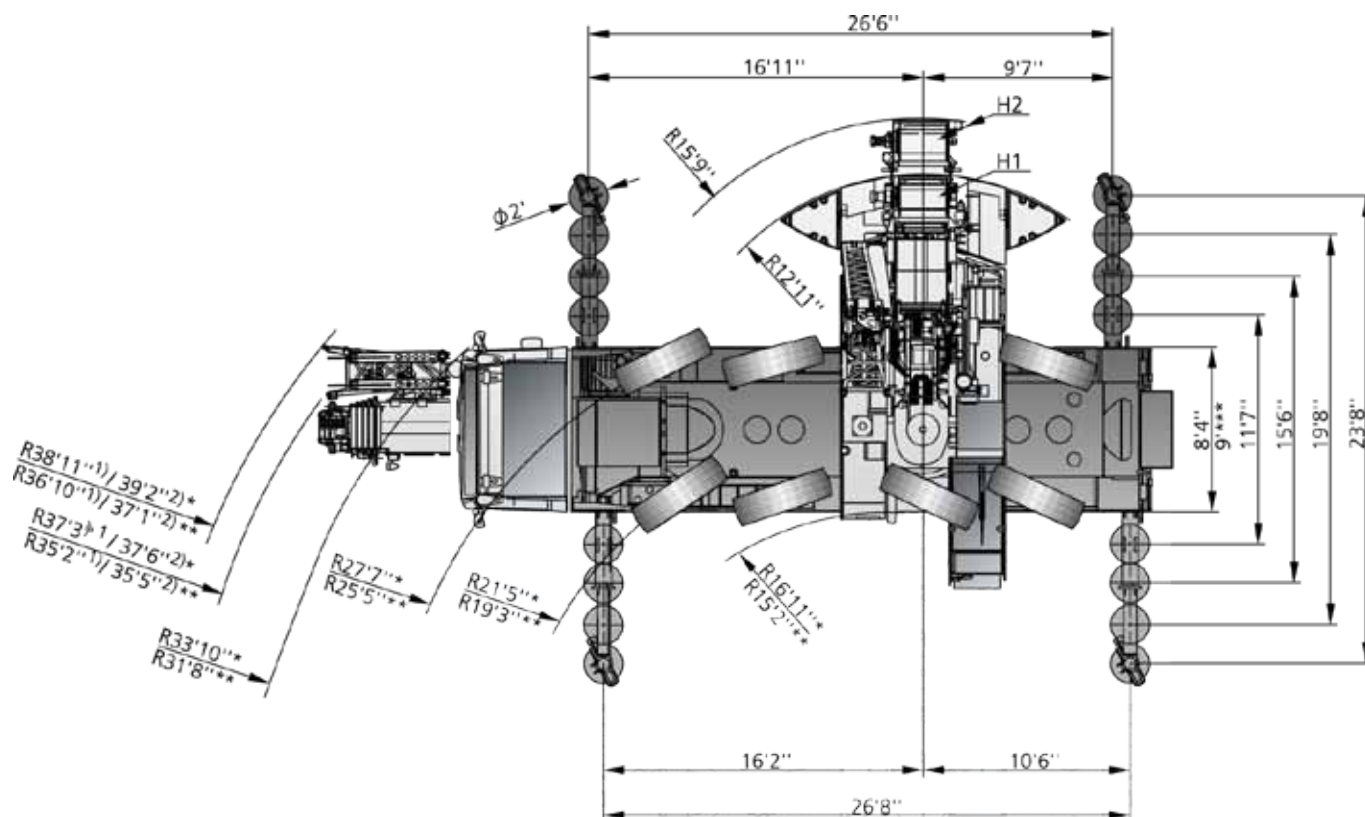

1)  164.4 ft 2)  194.9 ft

* steering mode 2


** steering mode 3

***  525/80 R25






see page 6

Specifications


AC 100-4 (L)

									
	Total						 		
< 22,100 lb	on request!								X
26,500 lb	106,000 lb	8 x 4 x 8	445/95R25	20-1-18	13,400 lb	–	X	–	–
26,500 lb	106,000 lb	8 x 6 x 8	445/95R25	8-0-18	9,500 lb	62.3 ft	X	–	–
32,000 lb	117,000 lb	8 x 6 x 8	445/95R25	50-3-18	19,000 lb	62.3 ft	X	–	–
36,400 lb	141,000 lb	8 x 6 x 8	445/95R25	50-3-18	42,500 lb	62.3 ft	X	–	–
26,500 lb	106,000 lb	8 x 6 x 8	445/95R25	50-3-18	9,500 lb	–	–	X	–
26,500 lb	106,000 lb	8 x 4 x 8	445/95R25	–	9,500 lb	32.8 ft	–	X	–
32,000 lb	117,000 lb	8 x 4 x 8	385/95R25	8-0-18	19,000 lb	62.3 ft	–	X	–
36,400 lb	143,300 lb	8 x 6 x 8	445/95R25	50-3-18	42,500 lb	62.3 ft	–	X	–

Further configurations on request

	1 Highway > 28 mph		4* Off-wall
	2 City < 28 mph		5* Crab steer mode
	3* Minimum turning radius < 3 mph		6* All wheel steering

* must be activated

			
	94,800 lb	134,500 lb	max. 52.8 mph ¹⁾
	22.4"	25.2"	


¹⁾ Depending on tire type, size and country specific legislation

				
				
1	361 ft/min	14,500 lb	0.72"	870 ft
2	361 ft/min	14,500 lb	0.72"	870 ft
	1,9 min ⁻¹			
	approx 490 s (39.4 ft - 164.4 ft)			
	approx 590 s (39.4 ft - 194.9 ft)			
	ca. 60 s (0° - 82°)			


					
1	15,000 lb	8-0-18	4	375 lb	3.3 ft
2	29,500 lb	20-1-18	4	662 lb	5.9 ft
3	44,100 lb	20-1-18	4	662 lb	5.9 ft
4	58,600 lb	50-3-18	4	1,210 lb	5.9 ft
5	73,000 lb	50-3-18	4	1,210 lb	5.9 ft
6	87,100 lb	50-3-18	4	1,210 lb	5.9 ft
7	101,200 lb	50-3-18	4	1,210 lb	5.9 ft
8	114,900 lb	80-5-18	4	1,430 lb	6.6 ft
9	128,800 lb	80-5-18	4 + 1	1,430 lb	6.6 ft
10	142,200 lb	80-5-18	4 + 1	1,430 lb	6.6 ft
11	155,700 lb	80-5-18	4 + 1 + 2	1,430 lb	6.6 ft
12	169,100 lb	100-7-18	4 + 1 + 2	1,650 lb	6.6 ft
13	176,400 lb	100-7-18	4 + 1 + 2	1,650 lb	6.6 ft

			
	385 / 95 R25 14.00 R25	445 / 95 R25 16.00 R25	525 / 80 R25 20.50 R25
	45 %	40 %	40 %
	> 70 %	> 60 %	> 60 %

HAV / HAV-VA

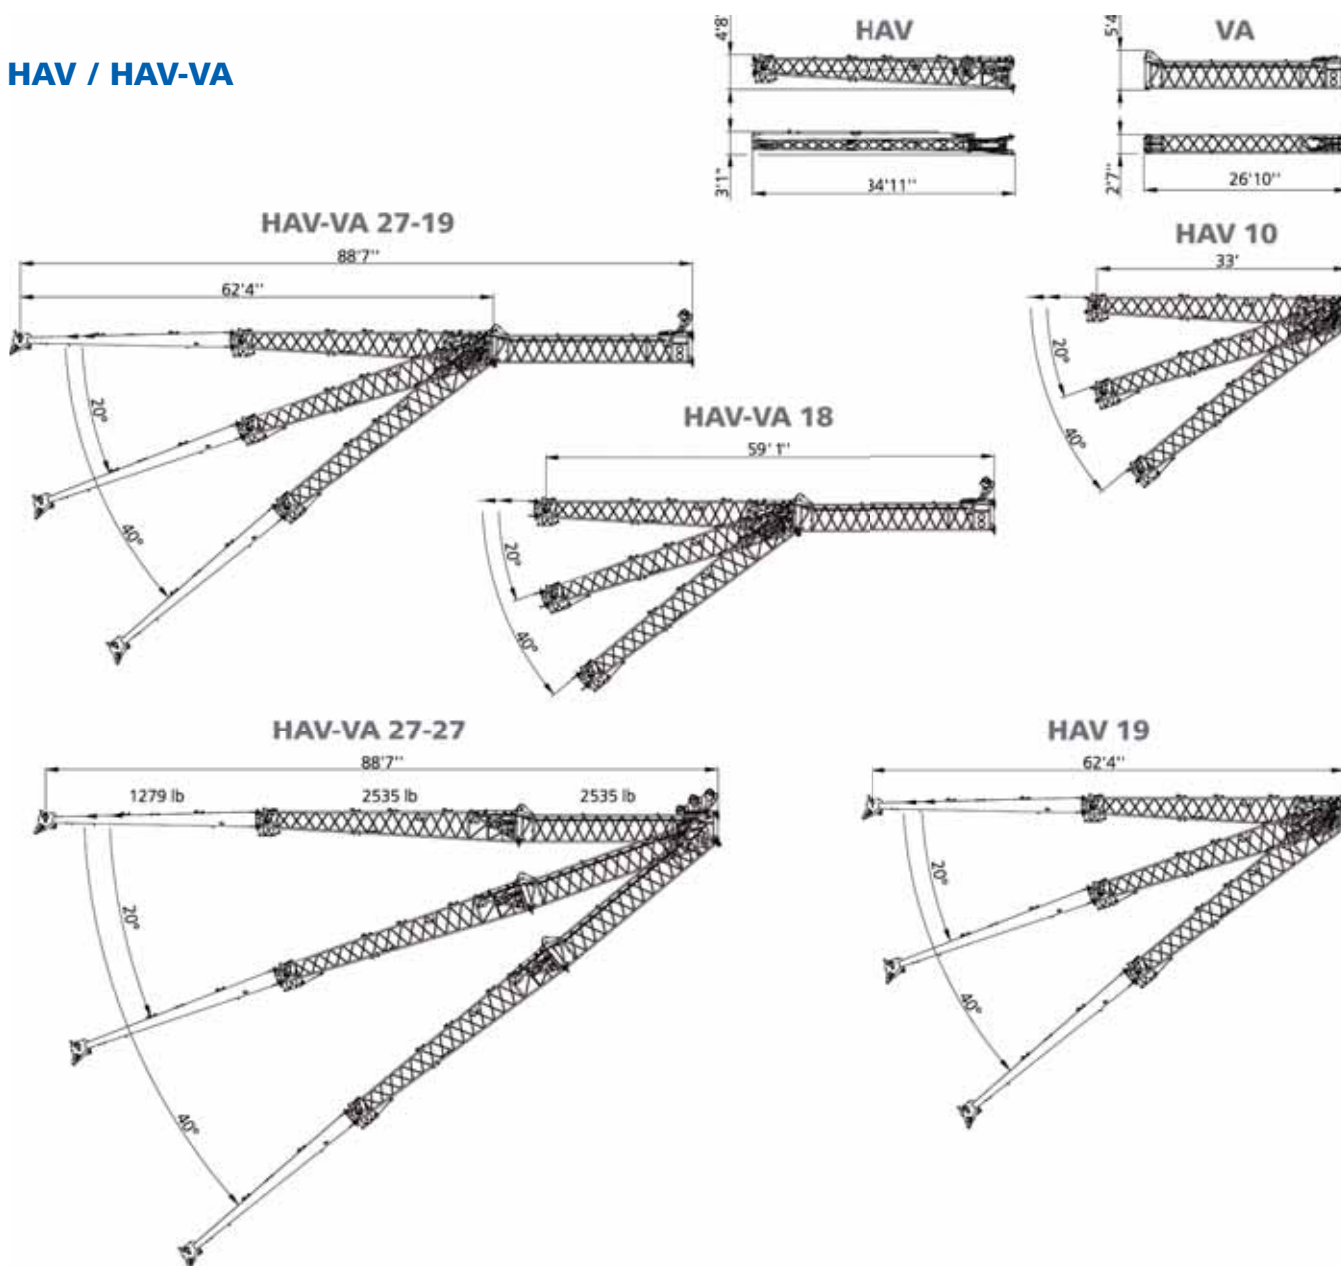


MS

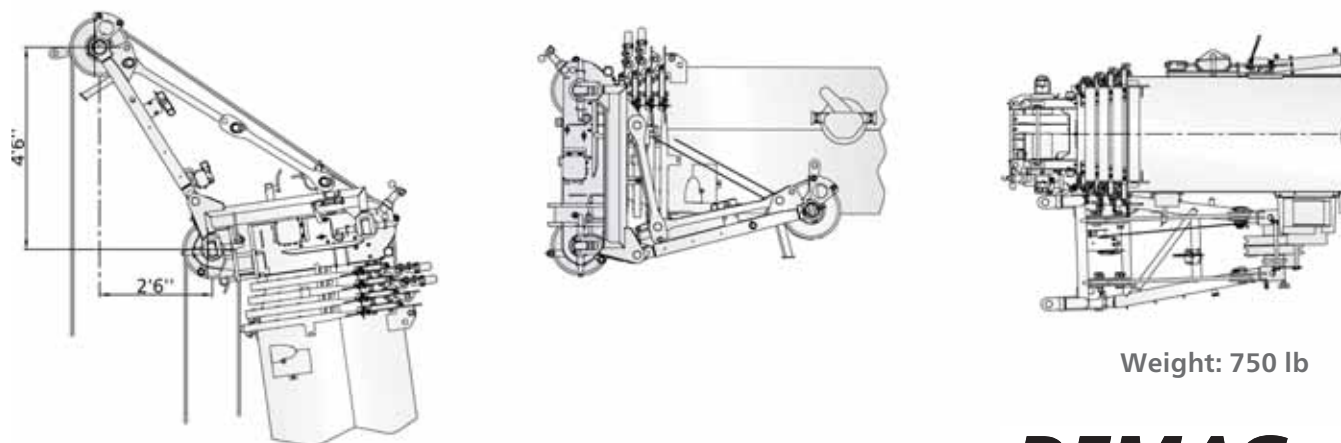


Counterweight

AC 100-4 (L)

Parts

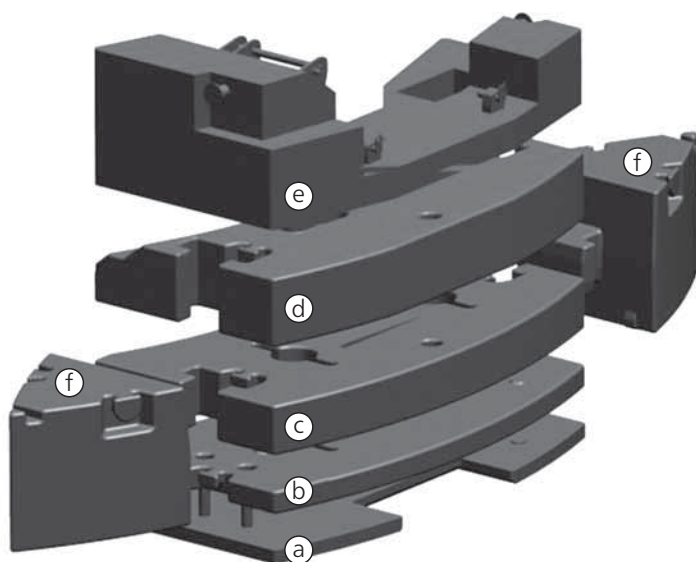

STANDARD

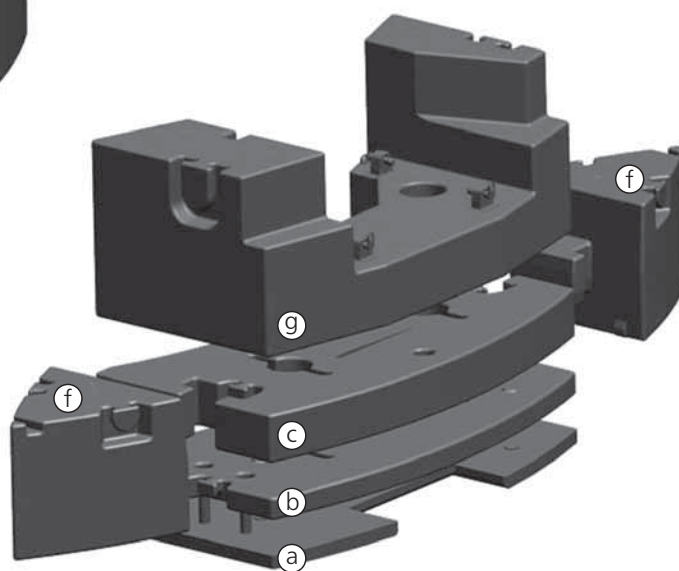

SPECIAL


Configurations

		(a) 4,000 lb	(b) 5,500 lb	(c) 10,600 lb	(d) 13,000 lb	(e) 9,500 lb	(f) 5,700 lb	(f) 5,700 lb	(g) 22,500 lb
STANDARD	0 lb								
	4,000 lb	X							
	9,500 lb					X			
	9,500 lb	X	X						
	13,400 lb	X				X			
	19,000 lb	X	X			X			
	20,000 lb	X	X	X					
	29,500 lb	X	X	X		X			
	33,000 lb	X	X	X	X				
	42,500 lb	X	X	X	X	X			
	44,500 lb	X	X	X	X		X	X	
	54,000 lb	X	X	X	X	X	X	X	
SPECIAL	22,500 lb								X
	26,500 lb	X							X
	32,000 lb	X	X						X
	42,500 lb	X	X	X					X
	54,000 lb	X	X	X			X	X	X



Counterweight

AC 100-4 (L)




Parts


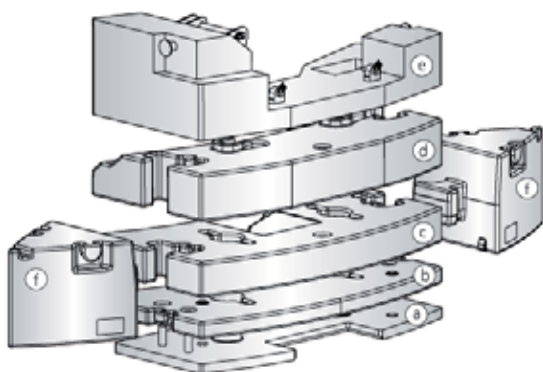


STANDARD

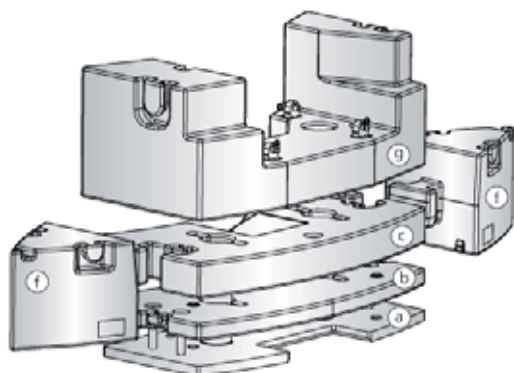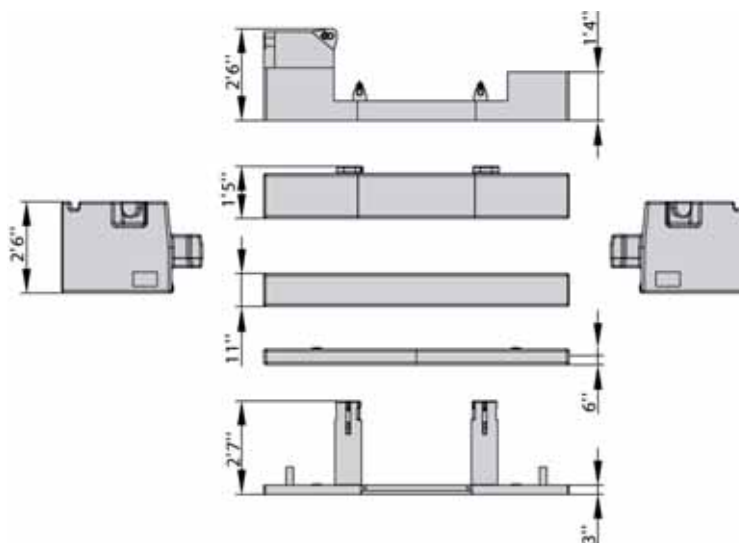

SPECIAL

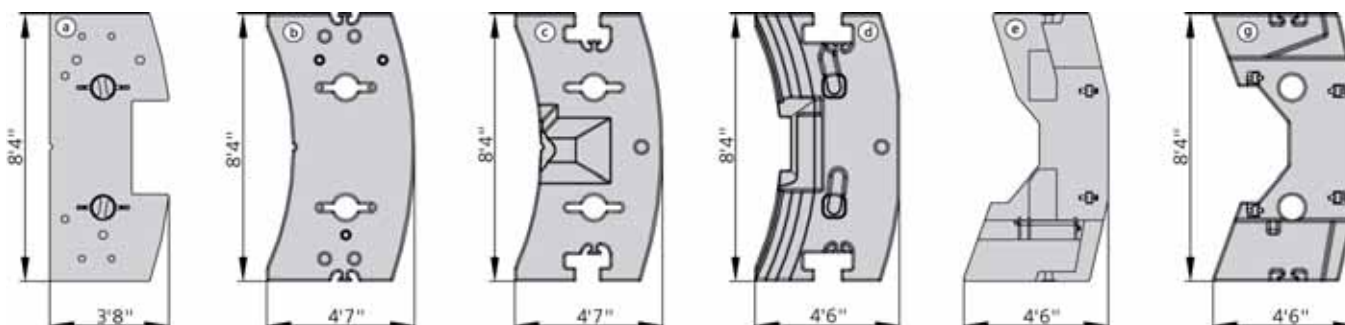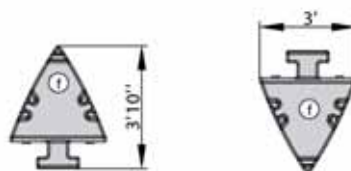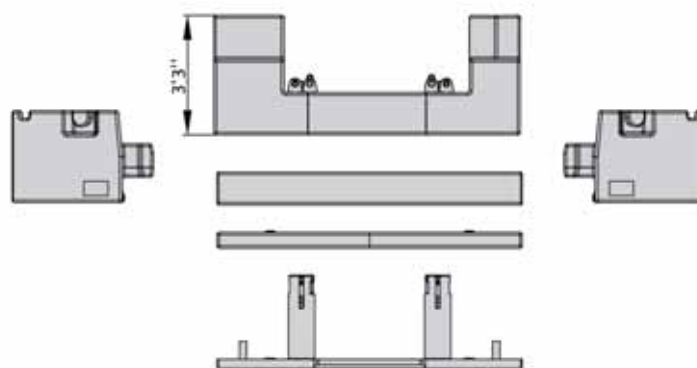

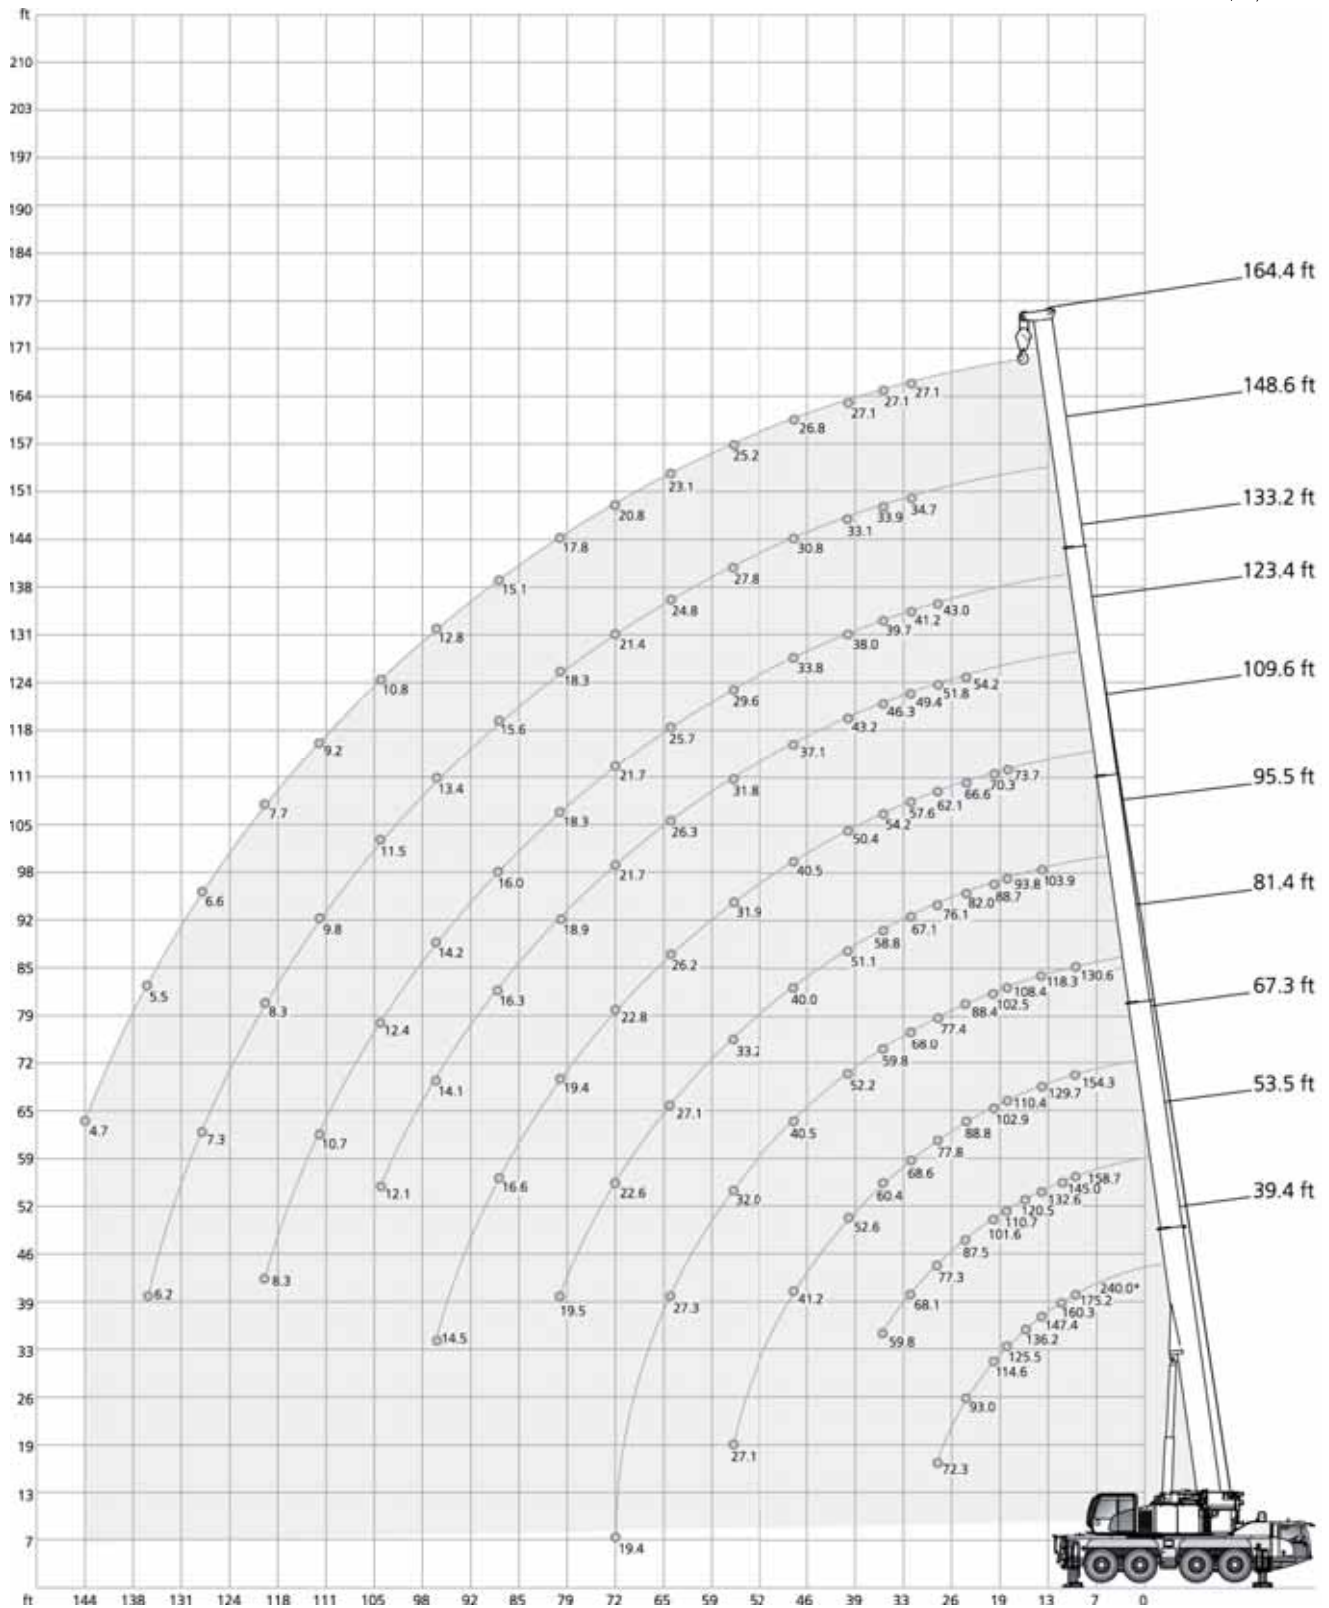

* Capacity class

 54,000 lb		 26.6 ft x 23.6 ft					360°					85%	
	 (0°)	39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4		
ft		1,000 lb											ft
	240.0 *	-	-	-	-	-	-	-	-	-	-		
10	175.2	162.1	158.7	154.3	130.6	-	-	-	-	-	-	10	
12	160.3	145.9	145.0	140.9	127.1	-	-	-	-	-	-	12	
14	147.4	131.7	132.6	129.7	118.3	103.9	-	-	-	-	-	14	
16	136.2	119.4	120.5	119.8	113.8	99.1	-	-	-	-	-	16	
18	125.5	109.6	110.7	110.4	108.4	93.8	73.7	-	-	-	-	18	
20	114.6	100.4	101.6	102.9	102.5	88.7	70.3	-	-	-	-	20	
24	93.0	86.2	87.5	88.8	88.4	82.0	66.6	54.2	-	-	-	24	
28	72.3	68.2	77.3	77.8	77.4	76.1	62.1	51.8	43.0	-	-	28	
32	-	-	68.1	68.6	68.0	67.1	57.6	49.4	41.2	34.7	27.1	32	
36	-	-	59.8	60.4	59.8	58.8	54.2	46.3	39.7	33.9	27.1	36	
40	-	-	-	52.6	52.2	51.1	50.4	43.2	38.0	33.1	27.1	40	
48	-	-	-	41.2	40.5	40.0	40.5	37.1	33.8	30.8	26.8	48	
56	-	-	-	27.1	32.0	33.2	31.9	31.8	29.6	27.8	25.2	56	
64	-	-	-	-	27.3	27.1	26.2	26.3	25.7	24.8	23.1	64	
72	-	-	-	-	19.4	22.6	22.8	21.7	21.7	21.4	20.8	72	
80	-	-	-	-	-	19.5	19.4	18.9	18.3	18.3	17.8	80	
88	-	-	-	-	-	14.0	16.6	16.3	16.0	15.6	15.1	88	
96	-	-	-	-	-	-	14.5	14.1	14.2	13.4	12.8	96	
104	-	-	-	-	-	-	12.8	12.1	12.4	11.5	10.8	104	
112	-	-	-	-	-	-	-	-	10.7	9.8	9.2	112	
120	-	-	-	-	-	-	-	-	8.3	8.3	7.7	120	
128	-	-	-	-	-	-	-	-	-	7.3	6.6	128	
136	-	-	-	-	-	-	-	-	-	6.2	5.5	136	
144	-	-	-	-	-	-	-	-	-	-	4.7	144	

* Capacity class

 42,500 lb		 26.6 ft x 23.6 ft		360° / Max.*								85 %	
	 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft			
ft	1,000 lb											ft	
10	161.6	162.1	158.7	158.7	154.3	154.3	130.6	130.6	-	-	10		
12	144.8	145.9	144.7	145.0	140.9	140.9	127.1	127.1	-	-	12		
14	130.3	131.7	131.4	132.6	129.7	129.7	118.3	118.3	103.9	103.9	14		
16	118.1	119.4	119.2	120.5	119.0	119.8	113.8	113.8	99.1	99.1	16		
18	108.2	109.6	109.5	110.7	109.3	110.4	107.8	108.4	93.8	93.8	18		
20	99.2	100.4	100.5	101.6	101.8	102.9	101.4	102.5	88.7	88.7	20		
24	85.3	86.1	86.5	87.5	87.8	88.8	87.3	88.4	82.0	82.0	24		
28	67.7	68.0	75.4	76.0	76.0	76.5	75.5	76.0	74.6	74.7	28		
32	-	-	64.3	64.9	64.9	65.3	64.5	64.8	63.4	64.0	32		
36	-	-	55.2	56.5	55.9	56.9	55.3	56.4	54.1	55.4	36		
40	-	-	-	-	47.5	49.2	46.8	48.6	46.2	47.5	40		
48	-	-	-	-	35.9	37.4	35.8	36.9	36.6	38.1	48		
56	-	-	-	-	24.1	25.8	29.4	30.5	28.9	30.2	56		
64	-	-	-	-	-	-	23.9	25.1	23.9	24.6	64		
72	-	-	-	-	-	-	19.4	19.4	19.9	21.2	72		
80	-	-	-	-	-	-	-	-	17.0	18.1	80		
88	-	-	-	-	-	-	-	-	14.0	14.0	88		

		360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft												ft
1,000 lb												
18	73.7	73.7	-	-	-	-	-	-	-	-	-	18
20	70.3	70.3	-	-	-	-	-	-	-	-	-	20
24	66.6	66.6	54.2	54.2	-	-	-	-	-	-	-	24
28	62.1	62.1	51.8	51.8	43.0	43.0	-	-	-	-	-	28
32	57.6	57.6	49.4	49.4	41.2	41.2	34.7	34.7	27.1	27.1	-	32
36	52.6	53.5	46.3	46.3	39.7	39.7	33.9	33.9	27.1	27.1	-	36
40	46.8	48.6	42.9	43.1	38.0	38.0	33.1	33.1	27.1	27.1	-	40
48	35.3	36.9	35.7	36.3	33.0	33.6	30.8	30.8	26.8	26.8	-	48
56	28.8	29.5	28.0	29.5	27.7	28.5	26.7	27.6	25.2	25.2	-	56
64	23.5	24.8	23.1	24.0	22.4	23.7	22.6	23.6	21.8	22.8	-	64
72	19.5	20.6	19.3	20.4	19.5	19.9	18.6	19.7	17.9	19.3	-	72
80	16.8	17.7	16.1	17.2	16.3	17.4	15.5	16.6	14.8	16.1	-	80
88	14.3	15.4	13.6	14.7	13.8	14.9	12.9	14.3	12.4	13.6	-	88
96	12.3	13.4	11.6	12.7	11.8	12.9	10.9	12.1	10.3	11.6	-	96
104	10.6	11.7	9.9	11.0	10.1	11.2	9.1	10.3	8.6	9.7	-	104
112	-	-	-	-	8.7	9.8	7.6	9.0	7.0	8.3	-	112
120	-	-	-	-	6.4	7.5	6.4	7.7	5.9	7.0	-	120
128	-	-	-	-	-	-	5.4	6.6	4.7	5.9	-	128
136	-	-	-	-	-	-	4.6	5.7	3.8	5.0	-	136
144	-	-	-	-	-	-	-	-	2.9	4.2	-	144

* Max. values are valid only for specific superstructure positions

 19,000 lb		 26.6 ft x 23.6 ft		360° / Max.*								85 %	
	 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft			
ft	1,000 lb											ft	
10	158.8	162.1	158.5	158.7	154.3	154.3	130.6	130.6	-	-	10		
12	141.4	145.9	142.5	145.0	140.8	140.9	127.1	127.1	-	-	12		
14	127.3	131.7	128.4	132.6	128.2	129.7	118.3	118.3	103.9	103.9	14		
16	115.4	119.4	116.5	120.5	116.4	119.8	113.8	113.8	99.1	99.1	16		
18	105.6	108.4	106.9	109.7	106.8	109.5	105.4	107.6	93.2	93.8	18		
20	96.0	97.6	97.6	99.2	98.9	100.9	95.7	100.5	86.4	88.7	20		
24	75.3	79.1	78.7	81.4	79.5	81.9	75.0	81.4	68.5	79.5	24		
28	57.9	64.1	61.7	68.0	62.6	68.6	60.6	68.0	58.7	67.0	28		
32	-	-	48.6	58.1	49.5	58.5	49.3	58.1	49.9	57.0	32		
36	-	-	40.4	50.9	41.3	51.3	42.4	50.9	41.9	50.2	36		
40	-	-	-	-	35.2	44.9	35.4	44.4	35.6	45.3	40		
48	-	-	-	-	26.3	35.8	26.5	36.0	26.7	36.5	48		
56	-	-	-	-	20.2	24.8	20.9	29.9	20.9	29.3	56		
64	-	-	-	-	-	-	16.6	24.4	16.9	24.2	64		
72	-	-	-	-	-	-	13.5	19.4	13.7	20.6	72		
80	-	-	-	-	-	-	-	-	11.3	17.5	80		
88	-	-	-	-	-	-	-	-	9.4	14.0	88		

		360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft												ft
1,000 lb												
18	73.7	73.7	-	-	-	-	-	-	-	-	-	18
20	70.2	70.3	-	-	-	-	-	-	-	-	-	20
24	63.9	66.6	54.2	54.2	-	-	-	-	-	-	-	24
28	54.7	62.1	49.1	51.8	43.0	43.0	-	-	-	-	-	28
32	46.7	57.0	44.5	49.4	39.9	41.2	34.7	34.7	27.1	27.1	-	32
36	41.0	50.9	38.8	46.3	36.2	39.7	32.6	33.9	27.1	27.1	-	36
40	35.2	44.4	34.3	42.9	33.6	38.0	31.4	33.1	26.8	27.1	-	40
48	26.5	35.3	25.8	35.8	26.0	33.1	24.4	30.8	22.7	26.8	-	48
56	20.6	29.1	19.9	28.4	20.1	28.1	19.3	26.9	17.8	25.2	-	56
64	16.4	24.0	15.8	23.5	16.0	22.9	15.1	22.9	13.9	22.0	-	64
72	13.1	20.1	12.6	19.9	12.9	19.9	11.8	19.3	10.9	18.4	-	72
80	10.7	17.3	10.0	16.6	10.2	16.8	9.2	15.9	8.5	15.5	-	80
88	8.7	14.9	8.1	14.3	8.3	14.5	7.3	13.6	6.6	13.1	-	88
96	7.1	12.8	6.4	12.3	6.7	12.4	5.7	11.5	5.0	10.9	-	96
104	5.9	11.2	5.2	10.6	5.2	10.8	4.4	9.9	3.7	9.6	-	104
112	-	-	-	-	4.1	9.4	3.2	8.5	2.6	7.9	-	112
120	-	-	-	-	2.2	7.5	2.2	7.2	-	7.0	-	120
128	-	-	-	-	-	-	-	6.4	-	5.8	-	128
136	-	-	-	-	-	-	-	5.5	-	5.0	-	136
144	-	-	-	-	-	-	-	-	-	4.2	-	144

* Max. values are valid only for specific superstructure positions

 13,400 lb		 26.6 ft x 23.6 ft		360° / Max.*						85 %	
 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft		
ft	1,000 lb									ft	
10	158.0	162.1	158.5	158.7	154.3	154.3	130.6	130.6	-	10	
12	140.7	145.9	141.8	145.0	140.5	140.9	127.1	127.1	-	12	
14	126.6	131.7	127.6	132.6	127.5	129.7	118.3	118.3	103.9	14	
16	114.7	119.4	115.9	120.5	115.8	119.8	113.8	113.8	99.1	16	
18	103.4	107.1	105.1	108.4	105.0	108.2	101.6	106.3	89.7	18	
20	92.2	95.0	95.0	96.6	95.8	98.3	88.1	97.9	79.5	20	
24	71.0	76.8	74.8	79.4	73.9	79.8	68.9	79.4	65.1	24	
28	52.8	63.1	56.6	66.3	57.5	66.7	55.6	66.3	54.6	28	
32	-	-	44.4	56.5	45.6	56.9	46.7	56.5	45.7	32	
36	-	-	36.9	49.4	38.7	49.9	39.1	49.4	38.4	36	
40	-	-	-	-	32.1	43.6	32.3	43.1	32.6	40	
48	-	-	-	-	23.8	34.4	24.4	34.9	24.3	48	
56	-	-	-	-	18.6	22.8	18.8	27.9	19.0	56	
64	-	-	-	-	-	-	14.8	22.9	15.0	64	
72	-	-	-	-	-	-	12.0	19.4	12.0	72	
80	-	-	-	-	-	-	-	-	9.6	80	
88	-	-	-	-	-	-	-	-	7.9	88	



 360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft										ft
1,000 lb										
18	73.7	73.7	-	-	-	-	-	-	-	18
20	69.7	70.3	-	-	-	-	-	-	-	20
24	60.8	66.6	53.2	54.2	-	-	-	-	-	24
28	50.7	62.1	47.0	51.8	42.4	43.0	-	-	-	28
32	44.2	55.8	41.6	49.4	38.5	41.2	34.7	34.7	27.1	32
36	37.8	49.4	36.3	45.0	34.8	39.7	31.0	33.9	26.9	36
40	32.2	43.1	31.1	41.6	30.7	37.9	28.3	33.1	26.1	40
48	24.0	33.8	23.3	33.5	23.7	32.1	21.6	30.3	19.9	48
56	18.5	27.6	17.8	26.9	18.1	26.3	16.9	25.9	15.3	56
64	14.4	22.5	13.8	22.2	14.2	22.3	13.1	21.5	11.7	64
72	11.5	19.2	10.9	18.6	11.1	18.8	10.0	17.9	8.9	72
80	9.2	16.2	8.5	15.5	8.7	15.7	7.6	14.9	6.8	80
88	7.4	13.8	6.7	13.4	7.0	13.5	5.8	12.6	5.2	88
96	5.9	12.0	5.3	11.3	5.3	11.5	4.4	10.6	3.7	96
104	4.8	10.3	4.1	9.9	4.1	9.9	3.2	9.2	2.6	104
112	-	-	-	-	3.0	8.7	2.1	7.9	-	112
120	-	-	-	-	-	6.4	-	6.5	-	120
128	-	-	-	-	-	-	-	5.3	-	128
136	-	-	-	-	-	-	-	4.4	-	136
144	-	-	-	-	-	-	-	-	2.9	144

* Max. values are valid only for specific superstructure positions

9,500 lb		26.6 ft x 23.6 ft		360° / Max.*		360° / Max.*		360° / Max.*		360° / Max.*		85 %
		360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft	
ft												ft
1,000 lb												
10	157.3	162.1	158.4	158.7	154.3	154.3	130.6	130.6	-	-	-	10
12	140.1	145.9	141.2	145.0	140.4	140.9	127.1	127.1	-	-	-	12
14	126.1	131.7	127.2	132.6	127.1	129.7	118.3	118.3	103.9	103.9	103.9	14
16	114.3	119.4	115.5	120.5	115.3	119.8	110.3	113.8	97.8	97.8	99.1	16
18	101.9	106.1	103.6	107.4	102.1	107.2	96.6	105.4	86.3	86.3	93.8	18
20	89.3	93.1	92.8	95.1	90.0	96.4	82.7	95.9	74.7	74.7	88.4	20
24	66.0	75.2	70.4	77.7	69.3	78.3	64.6	77.7	62.4	62.4	76.7	24
28	48.9	62.4	52.6	64.8	53.6	65.3	53.4	64.8	51.1	51.1	63.9	28
32	-	-	41.2	55.3	43.5	55.8	43.7	55.3	43.0	43.0	55.0	32
36	-	-	34.1	48.4	36.1	48.9	36.3	48.4	36.5	36.5	49.1	36
40	-	-	-	-	29.7	42.5	30.4	42.0	30.2	30.2	43.0	40
48	-	-	-	-	22.2	33.3	22.4	33.5	22.7	22.7	32.9	48
56	-	-	-	-	16.9	21.6	17.1	26.5	17.3	17.3	26.5	56
64	-	-	-	-	-	-	13.4	21.8	13.5	13.5	22.0	64
72	-	-	-	-	-	-	10.6	18.6	10.6	10.6	18.4	72
80	-	-	-	-	-	-	-	-	8.5	8.5	15.5	80
88	-	-	-	-	-	-	-	-	6.8	6.8	13.7	88

		360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft												ft
1,000 lb												
18	73.4	73.7	-	-	-	-	-	-	-	-	-	18
20	68.7	70.3	-	-	-	-	-	-	-	-	-	20
24	57.0	66.6	51.4	54.2	41.3	-	-	-	-	-	-	24
28	48.9	61.4	45.3	51.8	40.5	43.0	33.6	-	-	-	-	28
32	41.1	55.0	38.9	49.4	37.5	41.2	33.2	34.7	27.1	27.1	27.1	32
36	35.2	47.7	33.4	44.2	32.8	39.7	29.7	33.9	25.6	25.6	27.1	36
40	30.0	40.9	28.5	40.8	28.1	37.7	25.7	33.1	23.5	23.5	27.1	40
48	22.2	33.1	21.4	31.6	21.5	31.1	19.4	29.9	17.8	17.8	26.8	48
56	16.7	26.3	16.1	26.0	16.3	25.6	14.8	24.9	13.4	13.4	23.8	56
64	13.0	21.4	12.3	21.2	12.6	21.4	11.2	20.4	9.9	9.9	19.2	64
72	10.0	18.2	9.5	17.7	9.8	17.9	8.7	17.0	7.3	7.3	15.5	72
80	7.9	15.3	7.2	14.8	7.5	14.9	6.5	14.0	5.5	5.5	12.6	80
88	6.3	13.3	5.6	12.6	5.8	12.8	4.7	11.8	4.0	4.0	10.4	88
96	4.8	11.4	4.2	10.7	4.4	10.9	3.4	9.8	2.8	2.8	8.5	96
104	3.9	9.7	3.2	9.0	3.2	9.1	2.3	8.1	-	-	7.0	104
112	-	-	-	-	2.4	7.6	-	6.6	-	-	5.7	112
120	-	-	-	-	-	5.3	-	5.5	-	-	4.7	120
128	-	-	-	-	-	-	-	4.4	-	-	3.7	128
136	-	-	-	-	-	-	-	3.5	-	-	2.8	136
144	-	-	-	-	-	-	-	-	-	-	2.0	144

* Max. values are valid only for specific superstructure positions

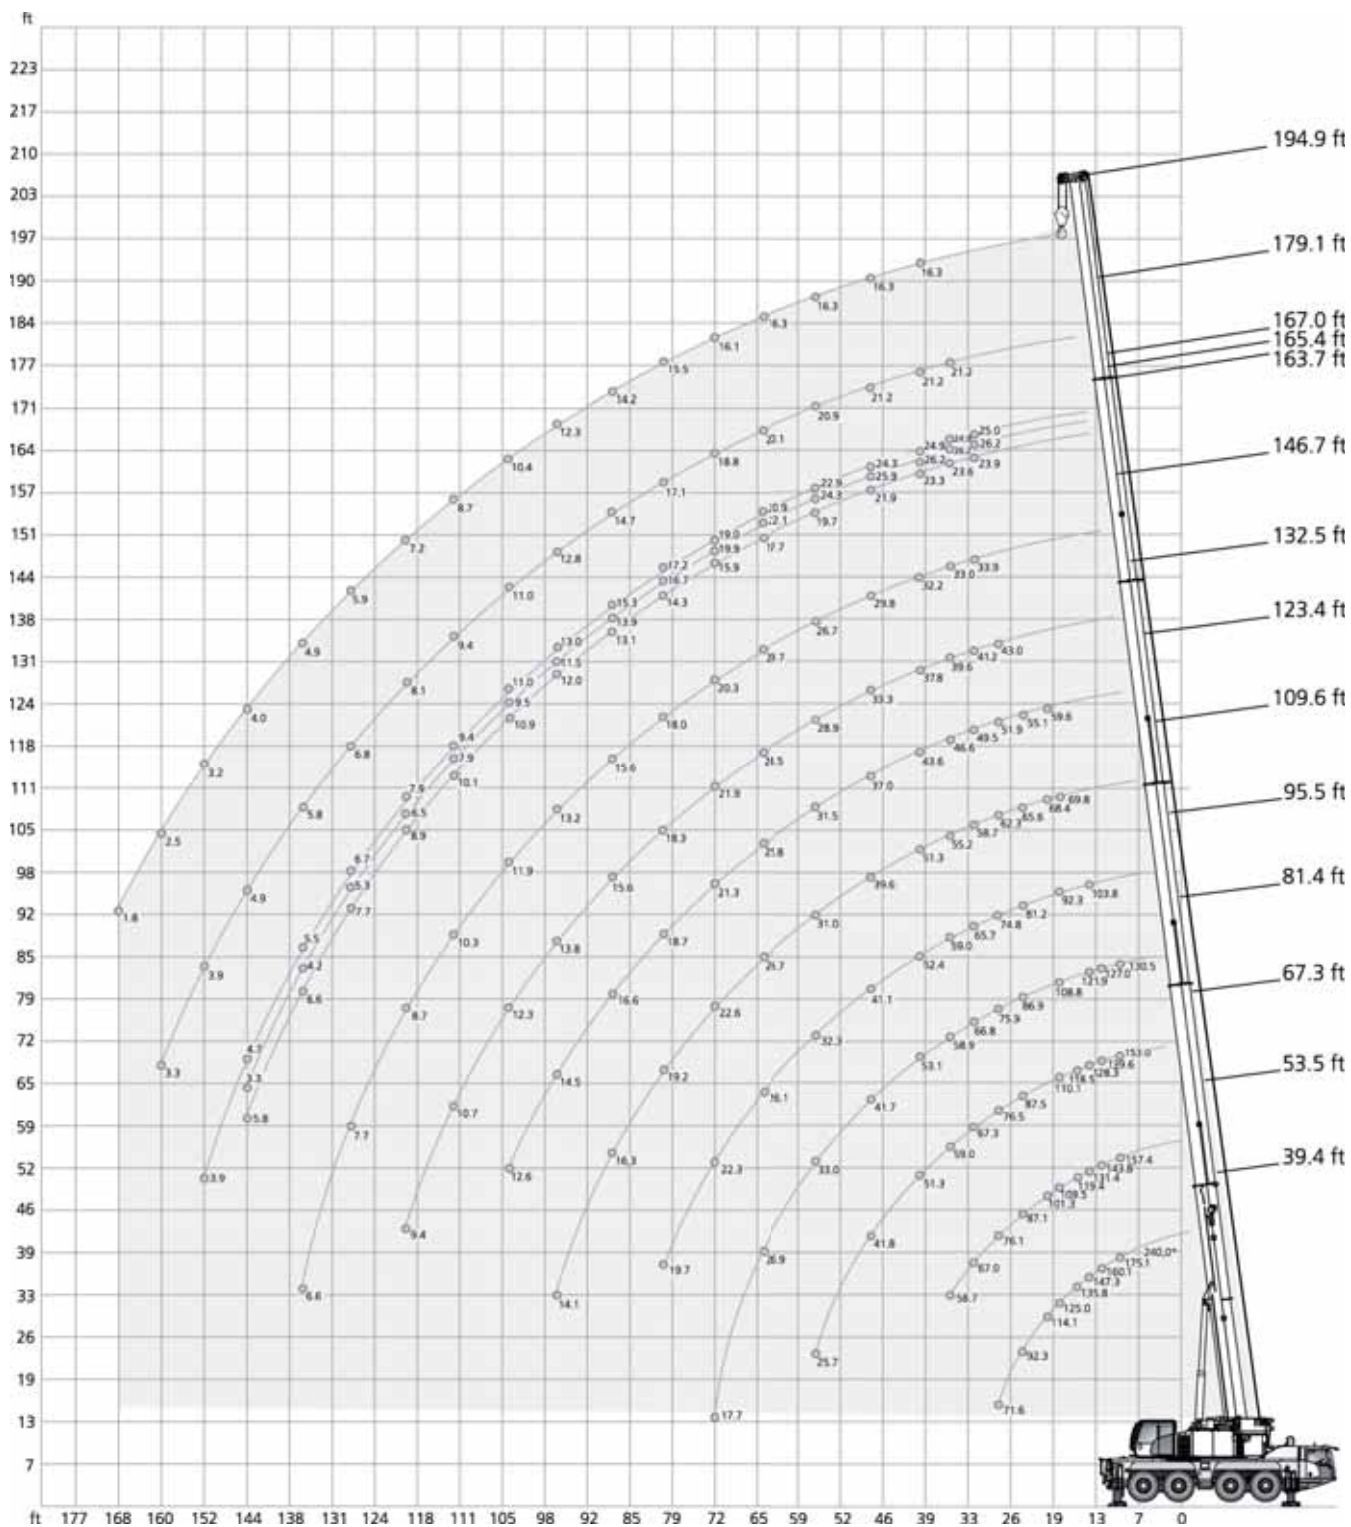

* Capacity class

 54,000 lb		 26.6 ft x 23.6 ft		360°		85 %											
 (0°)		(ft)															
	39.4	39.4	53.5	67.3	81.4	95.5	109.6	123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9		
ft		1,000 lb															ft
	240.0*	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
10	175.1	161.2	157.4	153.0	130.5	-	-	-	-	-	-	-	-	-	-	10	
12	160.1	145.0	143.8	139.6	127.0	-	-	-	-	-	-	-	-	-	-	12	
14	147.3	130.8	131.4	128.3	121.9	103.8	-	-	-	-	-	-	-	-	-	14	
16	135.8	118.5	119.4	118.5	116.1	97.8	-	-	-	-	-	-	-	-	-	16	
18	125.0	108.6	109.5	110.1	108.8	92.3	69.8	-	-	-	-	-	-	-	-	18	
20	114.1	99.4	101.3	101.6	101.1	87.2	68.4	59.6	-	-	-	-	-	-	-	20	
24	92.3	85.3	87.1	87.5	86.9	81.2	65.6	55.1	-	-	-	-	-	-	-	24	
28	71.6	67.1	76.1	76.5	75.9	74.8	62.3	51.9	43.0	-	-	-	-	-	-	28	
32	-	-	67.0	67.3	66.8	65.7	58.7	49.5	41.2	33.9	23.9	26.2	25.0	-	-	32	
36	-	-	58.7	59.0	58.9	59.0	55.2	46.6	39.6	33.0	23.6	26.2	24.9	21.2	-	36	
40	-	-	-	51.3	53.1	52.4	51.3	43.6	37.8	32.2	23.3	26.2	24.9	21.2	16.3	40	
48	-	-	-	41.8	41.7	41.1	39.6	37.0	33.3	29.8	21.9	25.9	24.3	21.2	16.3	48	
56	-	-	-	25.7	33.0	32.3	31.0	31.5	28.9	26.7	19.7	24.3	22.9	20.9	16.3	56	
64	-	-	-	-	26.9	26.1	26.7	25.8	24.5	23.7	17.7	22.1	20.9	20.1	16.3	64	
72	-	-	-	-	17.7	22.3	22.6	21.3	21.9	20.3	15.9	19.9	19.0	18.8	16.1	72	
80	-	-	-	-	-	19.7	19.2	18.7	18.3	18.0	14.3	16.7	17.2	17.1	15.5	80	
88	-	-	-	-	-	9.3	16.3	16.6	15.6	15.6	13.1	13.9	15.3	14.7	14.2	88	
96	-	-	-	-	-	-	14.1	14.5	13.8	13.2	12.0	11.5	13.0	12.8	12.3	96	
104	-	-	-	-	-	-	8.9	12.6	12.3	11.9	10.9	9.5	11.0	11.0	10.4	104	
112	-	-	-	-	-	-	-	-	10.7	10.3	10.1	7.9	9.4	9.4	8.7	112	
120	-	-	-	-	-	-	-	-	9.4	8.7	8.9	6.5	7.9	8.1	7.2	120	
128	-	-	-	-	-	-	-	-	-	7.7	7.7	5.3	6.7	6.8	5.9	128	
136	-	-	-	-	-	-	-	-	-	6.6	6.6	4.2	5.5	5.8	4.9	136	
144	-	-	-	-	-	-	-	-	-	-	5.8	3.3	4.7	4.9	4.0	144	
152	-	-	-	-	-	-	-	-	-	-	-	-	3.9	3.9	3.2	152	
160	-	-	-	-	-	-	-	-	-	-	-	-	-	3.3	2.5	160	
168	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.8	168	

* Capacity class

 42,500 lb		 26.6 ft x 23.6 ft		360° / Max.*										85%	
 ft	 360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft	 ft
1,000 lb															
10	160.5	161.2	157.4	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	10
12	143.9	145.0	143.6	143.9	139.6	139.6	127.0	127.0	-	-	-	-	-	-	12
14	129.4	130.8	130.1	131.4	128.3	128.3	121.9	121.9	103.8	103.8	-	-	-	-	14
16	117.2	118.5	118.0	119.4	118.4	118.5	116.1	116.1	97.8	97.8	-	-	-	-	16
18	107.4	108.6	109.0	109.5	109.6	110.1	108.2	108.7	92.3	92.3	69.8	69.8	-	-	18
20	98.3	99.4	100.2	101.3	100.5	101.6	100.0	101.1	87.2	87.2	68.4	68.4	59.6	59.6	20
24	84.2	85.3	86.2	87.1	86.5	87.5	86.0	86.9	81.1	81.2	65.6	65.6	55.1	55.1	24
28	66.7	67.1	74.4	74.9	74.7	75.2	74.2	74.7	73.2	73.5	62.3	62.3	51.9	51.9	28
32	-	-	63.2	64.0	63.7	64.2	64.3	64.5	63.6	64.0	58.7	58.7	49.5	49.5	32
36	-	-	54.2	55.6	54.6	55.8	56.5	57.5	55.7	56.8	52.6	53.6	46.6	46.6	36
40	-	-	-	-	48.4	49.5	48.4	50.1	47.5	49.2	46.0	47.9	43.3	43.5	40
48	-	-	-	-	36.5	38.1	36.5	38.0	35.6	37.3	34.3	36.1	35.0	35.6	48
56	-	-	-	-	23.0	24.5	28.7	30.0	27.8	29.4	28.8	29.4	27.7	29.1	56
64	-	-	-	-	-	-	23.1	24.4	24.0	24.6	23.5	24.8	22.6	23.5	64
72	-	-	-	-	-	-	17.0	17.0	20.1	21.2	19.3	20.6	19.7	20.3	72
80	-	-	-	-	-	-	-	-	17.0	18.1	16.5	17.4	16.6	17.7	80
88	-	-	-	-	-	-	-	-	9.3	9.2	14.9	15.2	14.0	15.1	88
96	-	-	-	-	-	-	-	-	-	-	12.9	13.7	12.5	13.1	96
104	-	-	-	-	-	-	-	-	-	-	8.9	8.9	10.8	11.4	104

 ft	 360° 132.5ft	Max. 132.5ft	360° 146.7ft	Max. 146.7ft	360° 163.7ft	Max. 163.7ft	360° 165.4ft	Max. 165.4ft	360° 167.0ft	Max. 167.0ft	360° 179.1ft	Max. 179.1ft	360° 194.9ft	Max. 194.9ft	 ft
1,000 lb															
28	43.0	43.0	-	-	-	-	-	-	-	-	-	-	-	-	28
32	41.2	41.2	33.9	33.9	23.9	26.2	26.2	26.2	25.0	25.0	-	-	-	-	32
36	39.6	39.6	33.0	33.0	23.6	26.2	26.2	26.2	24.9	24.9	21.2	21.2	-	-	36
40	37.8	37.8	32.2	32.2	23.3	26.2	26.2	26.2	24.9	24.9	21.2	21.2	16.3	16.3	40
48	32.4	33.0	29.8	29.8	21.9	25.9	25.9	25.9	24.3	24.3	21.2	21.2	16.3	16.3	48
56	26.7	27.4	25.5	26.5	19.7	24.3	24.3	24.3	22.9	22.9	20.9	20.9	16.3	16.3	56
64	22.7	23.6	21.9	22.6	17.7	22.1	20.9	22.1	20.9	20.9	20.1	20.1	16.3	16.3	64
72	18.6	19.9	18.6	19.7	15.9	19.0	17.1	18.4	18.4	19.0	17.7	18.8	16.1	16.1	72
80	16.4	16.8	15.9	16.8	14.3	16.6	13.9	15.2	15.2	16.6	15.3	15.9	14.2	15.4	80
88	14.0	14.9	13.5	14.4	13.1	14.0	11.2	12.6	12.6	14.0	12.9	13.8	11.8	13.3	88
96	12.0	13.1	11.4	12.6	11.6	12.0	9.0	10.5	10.5	11.8	10.7	11.9	9.8	11.2	96
104	10.2	11.3	9.8	10.8	9.9	10.9	7.3	8.6	8.8	9.9	8.8	10.1	8.1	9.5	104
112	8.7	9.8	9.0	9.2	8.3	9.4	5.9	7.2	7.2	8.5	7.4	8.5	6.5	7.9	112
120	7.5	8.6	7.7	8.3	7.0	8.1	4.6	5.9	5.9	7.2	6.1	7.2	5.3	6.6	120
128	-	-	6.6	7.6	5.9	7.0	3.5	4.8	4.8	6.2	5.1	6.2	4.2	5.5	128
136	-	-	4.8	5.9	5.0	6.1	2.6	3.9	3.9	5.1	4.0	5.3	3.3	4.4	136
144	-	-	-	-	4.2	5.1	1.8	3.1	3.1	4.2	3.1	4.4	2.5	3.6	144
152	-	-	-	-	-	-	-	-	2.4	-	2.5	3.6	-	3.0	152
160	-	-	-	-	-	-	-	-	-	-	1.8	2.9	-	2.3	160

* Max. values are valid only for specific superstructure positions

19,000 lb		26.6 ft x 23.6 ft		360° / Max.*										85%	
ft	360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft	ft
1,000 lb															
10	158.0	161.2	157.2	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	10
12	140.7	145.0	141.4	143.9	139.5	139.6	127.0	127.0	-	-	-	-	-	-	12
14	126.4	130.8	127.3	131.4	126.9	128.3	121.9	121.9	103.8	103.8	-	-	-	-	14
16	114.5	118.5	115.9	119.4	116.3	118.5	115.3	116.1	97.8	97.8	-	-	-	-	16
18	104.8	107.7	106.7	108.9	106.9	109.5	105.3	108.0	91.8	92.3	69.8	69.8	-	-	18
20	95.4	97.2	97.4	99.6	97.7	99.8	94.6	99.2	85.3	87.2	68.4	68.4	59.6	59.6	20
24	75.1	78.4	77.9	80.5	78.6	80.8	73.9	80.3	69.2	78.6	63.8	65.6	55.1	55.1	24
28	58.0	63.2	61.2	67.0	62.2	67.4	62.8	67.6	58.9	66.3	53.8	62.3	49.4	51.9	28
32	-	-	48.9	57.0	50.8	58.4	50.7	58.8	49.2	58.3	46.4	56.7	43.0	49.5	32
36	-	-	40.8	49.8	42.3	51.6	42.2	51.5	41.3	51.0	40.5	49.9	38.4	46.3	36
40	-	-	-	-	34.9	45.1	34.9	45.1	34.9	44.4	35.4	43.4	33.7	42.6	40
48	-	-	-	-	25.8	36.1	27.1	36.0	27.1	35.5	26.3	34.3	26.7	35.2	48
56	-	-	-	-	17.7	23.5	21.4	29.1	21.0	28.5	21.4	29.1	21.0	28.1	56
64	-	-	-	-	-	-	17.1	23.8	17.3	24.5	17.1	24.1	17.1	22.7	64
72	-	-	-	-	-	-	14.0	17.0	14.2	20.6	14.0	19.9	13.7	20.3	72
80	-	-	-	-	-	-	-	-	11.8	17.6	11.4	16.7	11.3	17.2	80
88	-	-	-	-	-	-	-	-	9.3	9.2	9.6	15.2	9.2	14.5	88
96	-	-	-	-	-	-	-	-	-	-	8.0	13.4	7.5	12.6	96
104	-	-	-	-	-	-	-	-	-	-	6.6	8.9	6.1	11.4	104

ft	360° 132.5ft	Max. 132.5ft	360° 146.7ft	Max. 146.7ft	360° 163.7ft	Max. 163.7ft	360° 165.4ft	Max. 165.4ft	360° 167.0ft	Max. 167.0ft	360° 179.1ft	Max. 179.1ft	360° 194.9ft	Max. 194.9ft	ft
1,000 lb															
28	43.0	43.0	-	-	-	-	-	-	-	-	-	-	-	-	28
32	39.2	41.2	33.9	33.9	23.9	26.2	26.2	26.2	25.0	25.0	-	-	-	-	32
36	34.7	39.6	31.3	33.0	23.6	26.2	26.2	26.2	24.9	24.9	21.2	21.2	-	-	36
40	32.5	37.8	29.9	32.2	23.3	26.2	25.9	26.2	24.9	24.9	21.2	21.2	16.3	16.3	40
48	25.8	32.4	25.3	29.8	21.9	25.9	21.5	25.9	23.3	24.3	20.5	21.2	16.3	16.3	48
56	20.7	27.0	20.1	25.5	19.4	24.3	16.6	24.3	18.4	22.9	18.0	20.9	15.4	16.3	56
64	16.4	23.2	16.4	21.9	15.8	21.1	12.8	21.1	14.4	20.9	14.2	20.1	12.4	16.3	64
72	13.7	19.0	13.5	19.0	12.6	19.0	9.8	17.3	11.3	19.0	11.1	17.9	9.5	16.1	72
80	11.3	16.5	10.9	16.1	10.2	15.7	7.4	14.4	8.9	15.7	8.7	15.4	7.2	14.8	80
88	9.3	14.6	8.8	14.2	8.2	13.3	5.5	12.0	7.0	13.3	6.7	13.4	5.4	12.5	88
96	7.7	12.5	7.1	12.0	6.4	12.0	3.8	9.8	5.3	11.2	5.3	11.2	4.1	10.4	96
104	6.3	10.8	5.7	10.2	5.0	10.4	2.6	8.1	3.9	9.5	4.1	9.5	2.8	8.6	104
112	5.0	9.4	4.6	9.0	3.9	9.0	-	6.8	2.8	8.1	3.0	8.1	1.9	7.0	112
120	3.3	8.1	3.6	8.3	3.0	8.0	-	5.5	1.9	6.8	2.0	7.2	-	5.7	120
128	-	-	2.8	7.4	2.1	6.8	-	4.6	-	5.7	-	5.9	-	4.7	128
136	-	-	-	5.8	-	5.8	-	3.9	-	5.0	-	4.9	-	3.9	136
144	-	-	-	-	-	5.1	-	3.1	-	4.2	-	4.0	-	3.1	144
152	-	-	-	-	-	-	-	-	-	-	-	3.6	-	2.6	152
160	-	-	-	-	-	-	-	-	-	-	-	2.9	-	2.3	160

* Max. values are valid only for specific superstructure positions

 13,400 lb		 26.6 ft x 23.6 ft		360° / Max.*												85 %	
		360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft		
1,000 lb																	
ft																ft	
10		157.1	161.2	157.2	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	10	
12		139.8	145.0	140.7	143.9	139.2	139.6	127.0	127.0	-	-	-	-	-	-	12	
14		125.7	130.8	126.5	131.4	126.2	128.3	121.9	121.9	103.8	103.8	-	-	-	-	14	
16		113.8	118.5	115.4	119.4	115.9	118.5	114.8	116.1	97.8	97.8	-	-	-	-	16	
18		102.9	106.4	105.2	107.6	105.6	108.2	101.3	106.7	88.3	92.3	69.8	69.8	-	-	18	
20		92.1	94.6	94.9	97.0	95.1	97.2	87.2	96.6	78.2	87.1	68.1	68.4	59.6	59.6	20	
24		71.2	76.3	74.2	78.4	73.0	78.7	70.8	78.2	66.1	76.9	60.1	65.6	54.1	55.1	24	
28		52.7	62.2	56.0	65.3	59.1	65.6	57.8	66.6	53.9	65.4	50.6	62.3	46.2	51.9	28	
32		-	-	45.2	55.6	46.5	57.2	46.5	57.2	45.1	56.7	43.2	55.5	40.5	49.5	32	
36		-	-	37.3	48.5	38.6	50.2	38.5	50.1	37.7	49.5	37.9	48.4	35.5	45.2	36	
40		-	-	-	-	31.9	43.8	31.7	43.8	33.2	43.1	32.3	42.0	32.0	41.0	40	
48		-	-	-	-	23.6	34.7	24.9	34.6	24.6	33.7	25.1	33.1	24.6	33.0	48	
56		-	-	-	-	17.7	21.6	19.5	27.1	19.7	27.3	19.5	27.6	19.3	26.3	56	
64		-	-	-	-	-	-	15.3	22.2	15.5	23.1	15.3	22.5	15.1	22.5	64	
72		-	-	-	-	-	-	12.4	17.0	12.6	19.3	12.4	18.6	12.2	18.8	72	
80		-	-	-	-	-	-	-	-	10.2	16.3	10.1	16.4	9.6	16.1	80	
88		-	-	-	-	-	-	-	-	8.5	9.2	8.3	14.3	7.8	13.7	88	
96		-	-	-	-	-	-	-	-	-	-	6.7	12.4	6.2	12.2	96	
104		-	-	-	-	-	-	-	-	-	-	5.4	8.9	5.0	10.6	104	


		360°	Max.	360°	Max.	360°	Max.	360°	Max.	360°	Max.	360°	Max.	360°	Max.	
ft		132.5ft	132.5ft	146.7ft	146.7ft	163.7ft	163.7ft	165.4ft	165.4ft	167.0ft	167.0ft	179.1ft	179.1ft	194.9ft	194.9ft	ft
1,000 lb																
28		42.0	43.0	-	-	-	-	-	-	-	-	-	-	-	-	28
32		36.6	41.2	33.9	33.9	23.9	26.2	26.2	25.0	25.0	-	-	-	-	-	32
36		33.0	39.6	29.8	33.0	23.6	26.2	25.9	26.2	24.9	24.9	21.2	21.2	-	-	36
40		29.8	37.5	28.3	32.2	23.3	26.2	25.0	26.2	24.6	24.9	21.1	21.2	16.3	16.3	40
48		24.2	31.0	22.6	29.3	21.5	25.9	18.8	25.9	20.7	24.3	19.2	21.2	16.1	16.3	48
56		18.6	26.1	18.4	24.6	17.5	23.5	14.3	23.5	16.0	22.9	15.5	20.9	13.8	16.3	56
64		15.1	21.8	14.9	21.2	13.7	20.6	10.6	19.6	12.2	20.6	11.9	19.7	10.1	16.3	64
72		12.2	18.3	11.7	17.9	10.6	17.3	7.8	16.0	9.3	17.3	9.1	16.8	7.5	16.1	72
80		9.8	15.9	9.4	15.4	8.5	14.6	5.7	13.3	7.2	14.6	7.0	14.6	5.5	13.0	80
88		8.0	13.5	7.4	13.0	6.7	13.1	4.1	10.9	5.5	12.3	5.3	12.0	4.0	10.4	88
96		6.4	11.6	5.8	11.2	5.3	11.5	2.6	8.9	4.2	10.2	3.9	9.8	2.6	8.4	96
104		5.0	9.9	4.5	9.8	3.9	9.6	-	7.3	2.8	8.6	2.8	8.3	-	6.8	104
112		4.1	8.5	3.5	9.0	2.8	8.3	-	5.9	-	7.2	-	7.0	-	5.5	112
120		2.5	7.5	2.7	7.7	2.0	7.1	-	4.8	-	6.1	-	5.7	-	4.4	120
128		-	-	-	6.6	-	6.2	-	3.7	-	5.1	-	4.7	-	3.4	128
136		-	-	-	5.0	-	5.1	-	2.7	-	4.0	-	3.9	-	2.6	136
144		-	-	-	-	-	4.2	-	1.8	-	3.1	-	3.3	-	2.0	144
152		-	-	-	-	-	-	-	-	-	-	-	2.5	-	-	152
160		-	-	-	-	-	-	-	-	-	-	-	1.8	-	-	160

* Max. values are valid only for specific superstructure positions

9,500 lb		26.6 ft x 23.6 ft		360° / Max.*										85%	
ft	360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft	ft
1,000 lb															
10	156.5	161.2	157.1	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	10
12	139.4	145.0	140.1	143.9	139.1	139.6	127.0	127.0	-	-	-	-	-	-	12
14	125.3	130.8	126.0	131.4	125.7	128.3	121.9	121.9	103.8	103.8	-	-	-	-	14
16	113.4	118.5	115.1	119.4	115.5	118.5	110.6	116.1	96.8	97.8	-	-	-	-	16
18	101.4	105.5	103.7	106.6	102.5	107.3	95.7	105.9	85.2	92.3	69.8	69.8	-	-	18
20	89.2	92.6	92.2	95.0	89.3	95.5	81.6	94.8	73.8	86.9	67.7	68.4	59.5	59.6	20
24	66.3	74.8	70.1	76.8	68.8	77.2	67.0	76.6	61.9	75.4	57.0	65.6	52.0	55.1	24
28	48.8	61.6	53.2	64.0	55.3	64.2	53.9	65.7	50.4	64.6	48.0	61.7	44.5	51.9	28
32	-	-	42.0	54.3	43.3	56.2	43.3	56.0	42.5	55.5	41.3	54.4	38.6	49.5	32
36	-	-	34.5	47.3	35.9	49.2	35.9	49.1	36.1	48.5	35.5	46.9	33.9	44.1	36
40	-	-	-	-	29.5	42.9	31.1	42.8	30.8	42.1	30.2	40.1	30.0	39.4	40
48	-	-	-	-	22.4	32.9	23.1	32.9	23.1	32.0	23.3	32.7	23.1	31.3	48
56	-	-	-	-	17.0	20.4	17.8	25.7	18.1	26.8	17.8	26.3	17.6	25.2	56
64	-	-	-	-	-	-	13.9	21.6	14.2	22.0	13.9	21.4	13.7	21.7	64
72	-	-	-	-	-	-	11.1	17.0	11.3	18.2	11.3	18.3	10.6	17.9	72
80	-	-	-	-	-	-	-	-	9.2	15.5	9.0	15.9	8.5	15.2	80
88	-	-	-	-	-	-	-	-	7.6	9.2	7.2	13.5	6.7	13.4	88
96	-	-	-	-	-	-	-	-	-	-	5.8	11.7	5.3	11.5	96
104	-	-	-	-	-	-	-	-	-	-	4.5	8.9	4.1	10.1	104

ft	360° 132.5ft	Max. 132.5ft	360° 146.7ft	Max. 146.7ft	360° 163.7ft	Max. 163.7ft	360° 165.4ft	Max. 165.4ft	360° 167.0ft	Max. 167.0ft	360° 179.1ft	Max. 179.1ft	360° 194.9ft	Max. 194.9ft	ft
1,000 lb															
28	39.6	43.0	-	-	-	-	-	-	-	-	-	-	-	-	28
32	35.9	41.2	31.7	33.9	23.9	26.2	26.2	26.2	25.0	25.0	-	-	-	-	32
36	31.6	39.6	28.4	33.0	23.6	26.2	24.7	26.2	24.9	24.9	21.2	21.2	-	-	36
40	28.8	37.3	27.0	32.2	23.2	26.2	22.6	26.2	24.4	24.9	20.9	21.2	16.3	16.3	40
48	22.0	29.8	21.1	28.5	20.3	25.9	16.7	25.9	18.6	24.3	18.2	21.2	15.4	16.3	48
56	17.4	25.2	17.1	24.0	15.5	22.9	12.3	22.9	14.1	22.9	13.7	20.9	11.8	16.3	56
64	13.9	20.7	13.3	20.4	11.9	19.9	9.0	18.3	10.6	19.9	10.1	18.4	8.5	16.3	64
72	10.9	17.9	10.4	17.3	9.3	16.4	6.4	14.6	8.0	16.4	7.5	15.9	6.0	14.2	72
80	8.7	15.2	8.1	14.6	7.2	14.3	4.4	11.6	5.9	13.2	5.7	12.8	4.2	11.1	80
88	7.0	12.8	6.3	12.4	5.6	12.3	2.9	9.4	4.4	11.0	4.2	10.5	2.9	8.8	88
96	5.5	11.1	4.9	10.8	4.2	10.3	-	7.5	3.0	8.9	2.9	8.5	-	7.1	96
104	4.3	9.5	3.7	9.8	3.0	8.6	-	5.9	1.9	7.4	1.9	7.0	-	5.5	104
112	3.3	8.1	2.6	8.1	2.0	7.2	-	4.8	-	6.1	-	5.7	-	4.3	112
120	-	6.6	1.9	6.8	-	6.1	-	3.7	-	5.0	-	4.7	-	3.3	120
128	-	-	-	5.7	-	5.1	-	2.6	-	4.1	-	3.9	-	2.5	128
136	-	-	-	4.0	-	4.1	-	1.7	-	3.1	-	3.0	-	1.7	136
144	-	-	-	-	-	3.3	-	-	-	2.2	-	2.4	-	-	144

* Max. values are valid only for specific superstructure positions

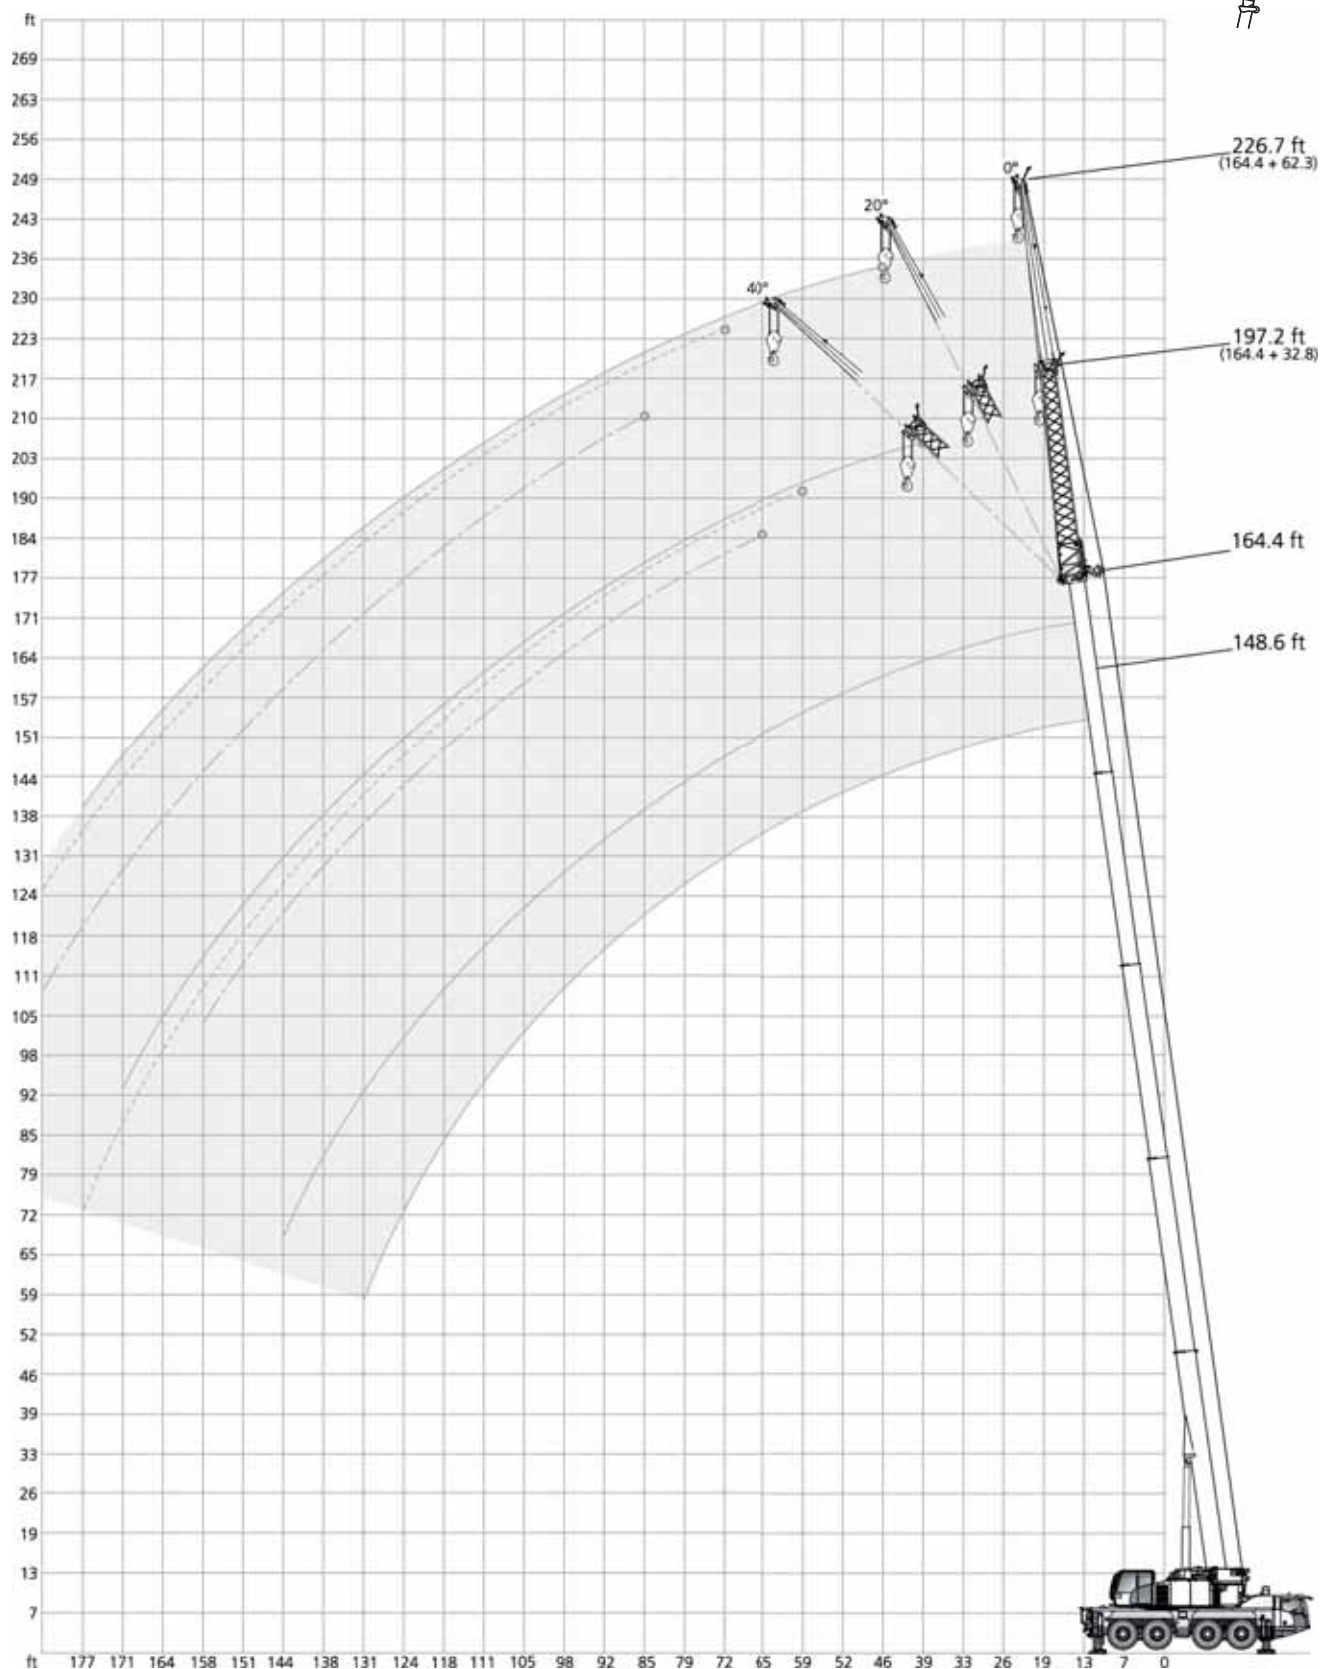

54,000 lb								26.6 ft x 23.6 ft								360°								85 %									
164.4 ft																148.6 ft																	
		32.8 ft			62.3 ft					32.8 ft			62.3 ft			0°	20°	40°															
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°																		
ft		1,000 lb															ft		1,000 lb														
40		14.6	-	-	8.4	-	-	36		17.9	-	-	-	-	-																		
48		14.6	-	-	8.4	-	-	40		17.9	-	-	10.1	-	-																		
56		14.6	14.6	-	8.4	-	-	48		17.9	-	-	10.1	-	-																		
64		14.6	14.6	13.4	8.4	-	-	56		17.9	17.9	-	10.1	-	-																		
72		14.6	13.9	12.6	8.4	-	-	64		17.9	17.9	16.2	10.1	-	-																		
80		14.5	13.1	12.0	8.4	8.4	-	72		17.9	17.6	15.9	10.1	9.9	-																		
88		13.9	12.2	11.3	8.4	8.4	7.5	80		16.7	16.8	15.6	10.1	9.7	8.1																		
96		12.1	11.5	10.7	8.4	8.1	7.1	88		14.7	15.3	15.1	10.1	9.4	7.8																		
104		10.2	10.9	10.2	8.4	7.6	6.9	96		12.3	13.3	13.7	10.0	9.1	7.6																		
112		8.5	9.4	9.8	7.9	7.0	6.4	104		11.0	11.3	11.7	9.7	8.9	7.5																		
120		7.2	7.8	8.3	7.4	6.7	6.1	112		9.4	9.8	9.8	9.0	8.6	7.3																		
128		5.9	6.6	6.9	6.2	6.3	5.8	120		7.9	8.5	8.9	7.6	8.3	7.3																		
136		4.9	5.4	5.8	5.1	6.0	5.6	128		6.8	7.3	7.6	6.8	7.6	7.2																		
144		4.0	4.4	4.7	4.2	5.1	5.3	136		5.8	6.2	6.4	6.0	6.4	6.9																		
152		3.2	3.6	3.6	3.4	4.3	4.9	144		4.7	5.1	5.3	4.9	5.5	6.0																		
160		2.5	2.8	-	2.6	3.5	3.9	152		3.9	4.3	-	4.1	5.0	5.0																		
168		-	-	-	-	2.8	3.1	160		3.3	3.5	-	3.4	4.2	4.5																		
176		-	-	-	-	2.1	2.3	168		-	-	-	2.8	3.3	3.1																		
								176		-	-	-	2.3	2.5	2.3																		
								184		-	-	-	-	2.0	-																		

 95.5 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
16		29.1	-	-	-	-	-
18		29.1	-	-	-	-	-
20		29.1	-	-	17.4	-	-
24		29.1	-	-	17.1	-	-
28		29.1	-	-	16.9	-	-
32		29.1	27.6	-	16.6	-	-
36		29.1	26.4	-	16.3	-	-
40		29.1	25.2	19.3	16.0	-	-
48		29.1	23.4	18.5	15.3	13.0	-
56		28.3	21.9	17.8	14.8	12.2	-
64		25.7	20.6	17.3	14.1	11.4	9.1
72		21.5	19.4	17.0	13.5	10.8	8.8
80		18.5	18.4	16.7	12.7	10.3	8.3
88		16.3	16.3	16.0	12.1	9.7	8.2
96		14.5	14.5	14.6	11.3	9.3	8.0
104		12.8	13.1	8.6	10.5	9.1	7.7
112		11.1	7.9	-	9.9	8.6	7.7
120		7.4	-	-	9.4	8.4	7.7
128		-	-	-	8.6	8.4	5.1
136		-	-	-	7.9	8.0	-
144		-	-	-	7.1	6.0	-

 39.4 ft							
 ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
10		29.1	-	-	21.6	-	-
12		29.1	-	-	21.5	-	-
14		29.1	-	-	21.4	-	-
16		29.1	29.1	-	21.1	-	-
18		29.1	29.1	-	20.7	-	-
20		29.1	28.9	-	20.4	-	-
24		29.1	26.8	-	19.6	-	-
28		29.1	24.7	20.3	18.8	-	-
32		29.1	23.0	19.3	17.9	14.5	-
36		27.2	21.6	18.5	16.9	13.7	-
40		24.8	20.3	17.8	15.9	12.9	-
48		21.2	18.4	16.9	13.8	11.6	-
56		18.5	17.2	-	12.2	10.6	9.3
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.6	-	-

42,500 lb				 26.6 ft x 23.6 ft				360°				85 %			
 164.4 ft								 148.6 ft							
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°			
ft	1,000 lb							ft	1,000 lb						
40	14.6	-	-	8.4	-	-		36	17.9	-	-	-	-	-	
48	14.6	-	-	8.4	-	-		40	17.9	-	-	10.1	-	-	
56	14.6	14.6	-	8.4	-	-		48	17.9	-	-	10.1	-	-	
64	14.6	14.6	13.4	8.4	-	-		56	17.9	17.9	-	10.1	-	-	
72	14.6	13.9	12.6	8.4	-	-		64	17.9	17.9	16.2	10.1	-	-	
80	14.2	13.1	12.0	8.4	8.4	-		72	17.6	17.6	15.9	10.1	9.9	-	
88	11.8	12.2	11.3	8.4	8.4	7.5		80	14.6	15.7	15.5	10.1	9.7	8.1	
96	9.7	10.8	10.7	8.4	8.1	7.1		88	12.7	13.1	14.0	10.1	9.4	7.8	
104	7.9	8.8	9.5	7.8	7.6	6.9		96	10.6	11.0	11.5	9.7	9.1	7.6	
112	6.5	7.2	7.8	6.5	7.0	6.4		104	8.8	9.5	10.0	8.4	8.9	7.5	
120	5.3	5.9	6.4	5.3	6.6	6.1		112	7.2	7.9	8.5	7.4	8.3	7.3	
128	4.2	4.8	5.2	4.3	5.5	5.8		120	6.1	6.6	7.0	6.3	7.0	7.3	
136	3.3	3.8	4.0	3.3	4.4	5.3		128	5.0	5.5	5.7	5.2	5.9	6.7	
144	2.5	2.9	3.1	2.5	3.6	4.2		136	4.0	4.4	4.7	4.2	5.1	5.6	
152	-	-	2.3	-	2.8	3.4		144	3.1	3.6	3.8	3.3	4.2	4.9	
160	-	-	-	-	2.0	2.6		152	2.4	2.8	-	2.6	3.4	3.9	
								160	-	2.0	-	2.0	2.6	3.1	

 95.5 ft							
 ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
16		29.1	-	-	-	-	-
18		29.1	-	-	-	-	-
20		29.1	-	-	17.4	-	-
24		29.1	-	-	17.1	-	-
28		29.1	-	-	16.9	-	-
32		29.1	27.6	-	16.6	-	-
36		29.1	26.4	-	16.3	-	-
40		29.1	25.2	19.3	16.0	-	-
48		29.1	23.4	18.5	15.3	13.0	-
56		27.2	21.9	17.8	14.8	12.2	-
64		22.9	20.6	17.3	14.1	11.4	9.1
72		19.5	19.2	17.0	13.5	10.8	8.8
80		16.8	17.0	16.4	12.7	10.3	8.3
88		14.4	14.7	15.1	12.1	9.7	8.2
96		12.3	12.8	13.0	11.3	9.3	8.0
104		10.9	11.0	8.6	10.4	9.1	7.7
112		9.6	7.9	-	9.6	8.6	7.7
120		7.4	-	-	8.3	8.4	7.7
128		-	-	-	7.5	7.8	5.1
136		-	-	-	6.8	7.0	-
144		-	-	-	6.0	4.6	-

 39.4 ft							
 ft	32.8 ft			62.3 ft			
	0°	20°	40°	0°	20°	40°	
1,000 lb							
10	29.1	-	-	21.6	-	-	
12	29.1	-	-	21.5	-	-	
14	29.1	-	-	21.4	-	-	
16	29.1	29.1	-	21.1	-	-	
18	29.1	29.1	-	20.7	-	-	
20	29.1	28.9	-	20.4	-	-	
24	29.1	26.8	-	19.6	-	-	
28	29.1	24.7	20.3	18.8	-	-	
32	29.1	23.0	19.3	17.9	14.5	-	
36	27.2	21.6	18.5	16.9	13.7	-	
40	24.8	20.3	17.8	15.9	12.9	-	
48	21.2	18.4	16.9	13.8	11.6	-	
56	18.5	17.2	-	12.2	10.6	9.3	
64	-	-	-	11.0	9.6	8.7	
72	-	-	-	9.9	9.1	8.2	
80	-	-	-	9.2	8.6	-	
88	-	-	-	8.6	-	-	

19,000 lb							360°							85%		
164.4 ft							148.6 ft									
ft	32.8 ft			62.3 ft			ft	32.8 ft			62.3 ft					
	0°	20°	40°	0°	20°	40°		0°	20°	40°	0°	20°	40°			
1,000 lb							1,000 lb									
40	14.6	-	-	8.4	-	-	36	17.9	-	-	-	-	-			
48	14.6	-	-	8.4	-	-	40	17.9	-	-	10.1	-	-			
56	14.6	14.6	-	8.4	-	-	48	17.9	-	-	10.1	-	-			
64	12.4	13.7	13.4	8.4	-	-	56	16.9	17.4	-	10.1	-	-			
72	9.5	11.1	12.4	8.4	-	-	64	14.2	14.8	15.9	10.1	-	-			
80	7.2	8.7	9.8	6.8	8.3	-	72	11.1	12.4	13.1	9.9	9.9	-			
88	5.5	6.7	7.7	5.1	7.3	7.5	80	8.7	10.0	11.1	8.3	9.5	8.1			
96	4.2	5.1	6.0	3.7	5.7	7.1	88	7.0	8.0	8.8	6.5	8.2	7.8			
104	2.8	3.7	4.6	2.6	4.4	5.9	96	5.3	6.2	7.0	5.0	6.9	7.6			
112	-	2.6	3.2	-	3.0	4.6	104	4.1	4.8	5.5	3.9	5.5	6.6			
120	-	-	2.2	-	2.2	3.5	112	2.8	3.7	4.1	2.8	4.1	5.5			
128	-	-	-	-	-	2.4	120	-	2.5	2.9	-	3.3	4.4			
							128	-	-	2.0	-	2.3	3.3			
							136	-	-	-	-	-	2.4			

95.5 ft						
ft	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°
1,000 lb						
16	29.1	-	-	-	-	-
18	29.1	-	-	-	-	-
20	29.1	-	-	17.4	-	-
24	29.1	-	-	17.1	-	-
28	29.1	-	-	16.9	-	-
32	29.1	27.6	-	16.6	-	-
36	29.1	26.4	-	16.3	-	-
40	29.0	25.2	19.3	16.0	-	-
48	26.4	23.4	18.5	15.3	13.0	-
56	20.9	21.0	17.8	14.8	12.2	-
64	17.1	17.9	17.3	14.1	11.4	9.1
72	14.0	14.8	15.5	13.2	10.8	8.8
80	11.6	12.2	12.7	11.8	10.3	8.3
88	9.5	10.2	10.5	9.9	9.7	8.2
96	7.8	8.3	8.6	8.2	9.2	8.0
104	6.3	6.8	7.0	7.0	7.9	7.7
112	5.2	5.5	-	5.7	6.6	7.2
120	4.2	-	-	4.7	5.5	5.9
128	-	-	-	3.9	4.4	4.7
136	-	-	-	3.2	3.5	-
144	-	-	-	2.7	2.7	-

39.4 ft						
ft	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°
1,000 lb						
10	29.1	-	-	21.6	-	-
12	29.1	-	-	21.5	-	-
14	29.1	-	-	21.4	-	-
16	29.1	29.1	-	21.1	-	-
18	29.1	29.1	-	20.7	-	-
20	29.1	28.9	-	20.4	-	-
24	29.1	26.8	-	19.6	-	-
28	29.1	24.7	20.3	18.8	-	-
32	29.1	23.0	19.3	17.9	14.5	-
36	27.2	21.6	18.5	16.9	13.7	-
40	24.8	20.3	17.8	15.9	12.9	-
48	21.2	18.4	16.9	13.8	11.6	-
56	18.5	17.2	-	12.2	10.6	9.3
64	-	-	-	11.0	9.6	8.7
72	-	-	-	9.9	9.1	8.2
80	-	-	-	9.2	8.6	-
88	-	-	-	8.6	-	-

 13,400 lb		 26.6 ft x 23.6 ft		360°										85%							
 164.4 ft																					
 		32.8 ft			62.3 ft																
		0°	20°	40°	0°	20°	40°														
ft		1,000 lb																			
40		14.6	-	-	8.4	-	-														
48		14.6	-	-	8.4	-	-														
56		13.4	14.4	-	8.4	-	-														
64		10.4	12.2	13.3	8.4	-	-														
72		7.6	9.1	10.6	7.1	-	-														
80		5.5	7.0	8.1	5.0	7.6	-														
88		4.0	5.2	6.2	3.5	5.8	7.4														
96		2.6	3.7	4.6	2.3	4.2	6.0														
104		-	2.6	3.3	-	3.0	4.6														
112		-	-	-	-	-	3.5														
120		-	-	-	-	-	2.4														

 148.6 ft																					
 		32.8 ft			62.3 ft																
		0°	20°	40°	0°	20°	40°														
ft		1,000 lb																			
36		17.9	-	-	-	-	-														
40		17.9	-	-	10.1	-	-														
48		17.5	17.3	-	10.1	-	-														
56		15.5	16.2	-	10.1	-	-														
64		12.0	13.4	14.4	9.9	-	-														
72		9.1	10.4	11.7	8.6	9.9	-														
80		7.0	8.3	9.4	6.6	8.7	8.1														
88		5.3	6.4	7.3	5.0	7.0	7.8														
96		3.9	4.8	5.7	3.6	5.5	6.9														
104		2.8	3.7	4.4	2.6	4.1	5.5														
112		-	2.6	3.0	-	3.0	4.3														
120		-	-	-	-	2.2	3.3														
128		-	-	-	-	-	2.3														



 95.5 ft							
 	32.8 ft			62.3 ft			
	0°	20°	40°	0°	20°	40°	
ft	1,000 lb						
16	29.1	-	-	-	-	-	
18	29.1	-	-	-	-	-	
20	29.1	-	-	17.4	-	-	
24	29.1	-	-	17.1	-	-	
28	29.1	-	-	16.9	-	-	
32	29.1	27.6	-	16.6	-	-	
36	29.1	26.4	-	16.3	-	-	
40	28.8	25.2	19.3	16.0	-	-	
48	24.4	23.0	18.5	15.3	13.0	-	
56	19.4	19.8	17.8	14.8	12.2	-	
64	15.3	16.4	16.6	14.0	11.4	9.1	
72	12.2	13.1	13.7	12.6	10.8	8.8	
80	10.0	10.7	11.1	10.5	10.2	8.3	
88	8.1	8.7	9.2	8.6	9.4	8.2	
96	6.6	7.1	7.4	7.0	8.2	7.9	
104	5.2	5.7	5.9	5.7	6.8	7.3	
112	4.1	4.6	-	4.6	5.5	6.1	
120	3.3	-	-	3.8	4.4	5.0	
128	-	-	-	3.0	3.5	4.0	
136	-	-	-	2.3	2.6	-	
144	-	-	-	1.8	2.0	-	

 39.4 ft							
 	32.8 ft			62.3 ft			
	0°	20°	40°	0°	20°	40°	
ft	1,000 lb						
10	29.1	-	-	21.6	-	-	
12	29.1	-	-	21.5	-	-	
14	29.1	-	-	21.4	-	-	
16	29.1	29.1	-	21.1	-	-	
18	29.1	29.1	-	20.7	-	-	
20	29.1	28.9	-	20.4	-	-	
24	29.1	26.8	-	19.6	-	-	
28	29.1	24.7	20.3	18.8	-	-	
32	29.1	23.0	19.3	17.9	14.5	-	
36	27.2	21.6	18.5	16.9	13.7	-	
40	24.8	20.3	17.8	15.9	12.9	-	
48	21.2	18.4	16.9	13.8	11.6	-	
56	18.5	17.2	-	12.2	10.6	9.3	
64	-	-	-	11.0	9.6	8.7	
72	-	-	-	9.9	9.1	8.2	
80	-	-	-	9.2	8.6	-	
88	-	-	-	8.6	-	-	

9,500 lb  26.6 ft x 23.6 ft							360° 85%						
 164.4 ft							 148.6 ft						
 ft	 32.8 ft			 62.3 ft			 ft	 32.8 ft			 62.3 ft		
	0°	20°	40°	0°	20°	40°		0°	20°	40°	0°	20°	40°
1,000 lb							1,000 lb						
40	14.6	-	-	8.4	-	-	36	17,9	-	-	-	-	-
48	14.2	-	-	8.4	-	-	40	17,9	-	-	10,1	-	-
56	11.8	13.5	-	8.4	-	-	48	16,9	17,3	-	10,1	-	-
64	8.5	10.4	12.1	7.5	-	-	56	13,6	15,2	14,3	10,1	-	-
72	6.2	7.8	9.1	5.6	-	-	64	10,3	12,0	13,1	9,3	-	-
80	4.4	5.7	6.8	3.8	6.3	-	72	7,6	9,1	10,4	7,1	9,7	-
88	2.9	4.0	5.0	2.4	4.6	6.6	80	5,7	7,0	8,0	5,3	7,6	8,1
96	-	2.6	3.5	-	3.3	5.0	88	4,2	5,2	6,1	3,7	5,8	7,4
104	-	-	2.3	-	2.1	3.7	96	2,8	3,9	4,6	2,5	4,4	6,0
112	-	-	-	-	-	2.4	104	1,9	2,6	3,3	-	3,2	4,6
							112	-	-	-	-	-	3,5
							120	-	-	-	-	-	2,5

 95.5 ft						
 ft	 32.8 ft			 62.3 ft		
	0°	20°	40°	0°	20°	40°
1,000 lb						
16	29.1	-	-	-	-	-
18	29.1	-	-	-	-	-
20	29.1	-	-	17.4	-	-
24	29.1	-	-	17.1	-	-
28	29.1	-	-	16.9	-	-
32	29.1	27.6	-	16.6	-	-
36	29.1	26.4	-	16.3	-	-
40	28.6	25.2	19.3	16.0	-	-
48	23.1	22.4	18.5	15.3	13.0	-
56	17.7	18.9	17.7	14.6	12.2	-
64	13.9	14.9	15.6	13.4	11.4	9.1
72	11.1	12.0	12.4	11.5	10.8	8.8
80	8.7	9.6	10.1	9.4	10.0	8.3
88	7.0	7.6	8.2	7.6	8.8	8.1
96	5.5	6.1	6.4	6.1	7.2	7.8
104	4.3	4.8	5.0	4.8	5.9	6.6
112	3.5	3.7	-	3.9	4.8	5.4
120	2.5	-	-	3.0	3.7	4.2
128	-	-	-	2.3	2.8	3.2
136	-	-	-	-	2.1	-

 39.4 ft						
 ft	 32.8 ft			 62.3 ft		
	0°	20°	40°	0°	20°	40°
1,000 lb						
10	29.1	-	-	21.6	-	-
12	29.1	-	-	21.5	-	-
14	29.1	-	-	21.4	-	-
16	29.1	29.1	-	21.1	-	-
18	29.1	29.1	-	20.7	-	-
20	29.1	28.9	-	20.4	-	-
24	29.1	26.8	-	19.6	-	-
28	29.1	24.7	20.3	18.8	-	-
32	29.1	23.0	19.3	17.9	14.5	-
36	27.2	21.6	18.5	16.9	13.7	-
40	24.8	20.3	17.8	15.9	12.9	-
48	21.2	18.4	16.9	13.8	11.6	-
56	17.5	16.9	-	12.2	10.6	9.3
64	-	-	-	11.0	9.6	8.7
72	-	-	-	9.9	9.1	8.2
80	-	-	-	9.2	8.6	-
88	-	-	-	8.5	-	-

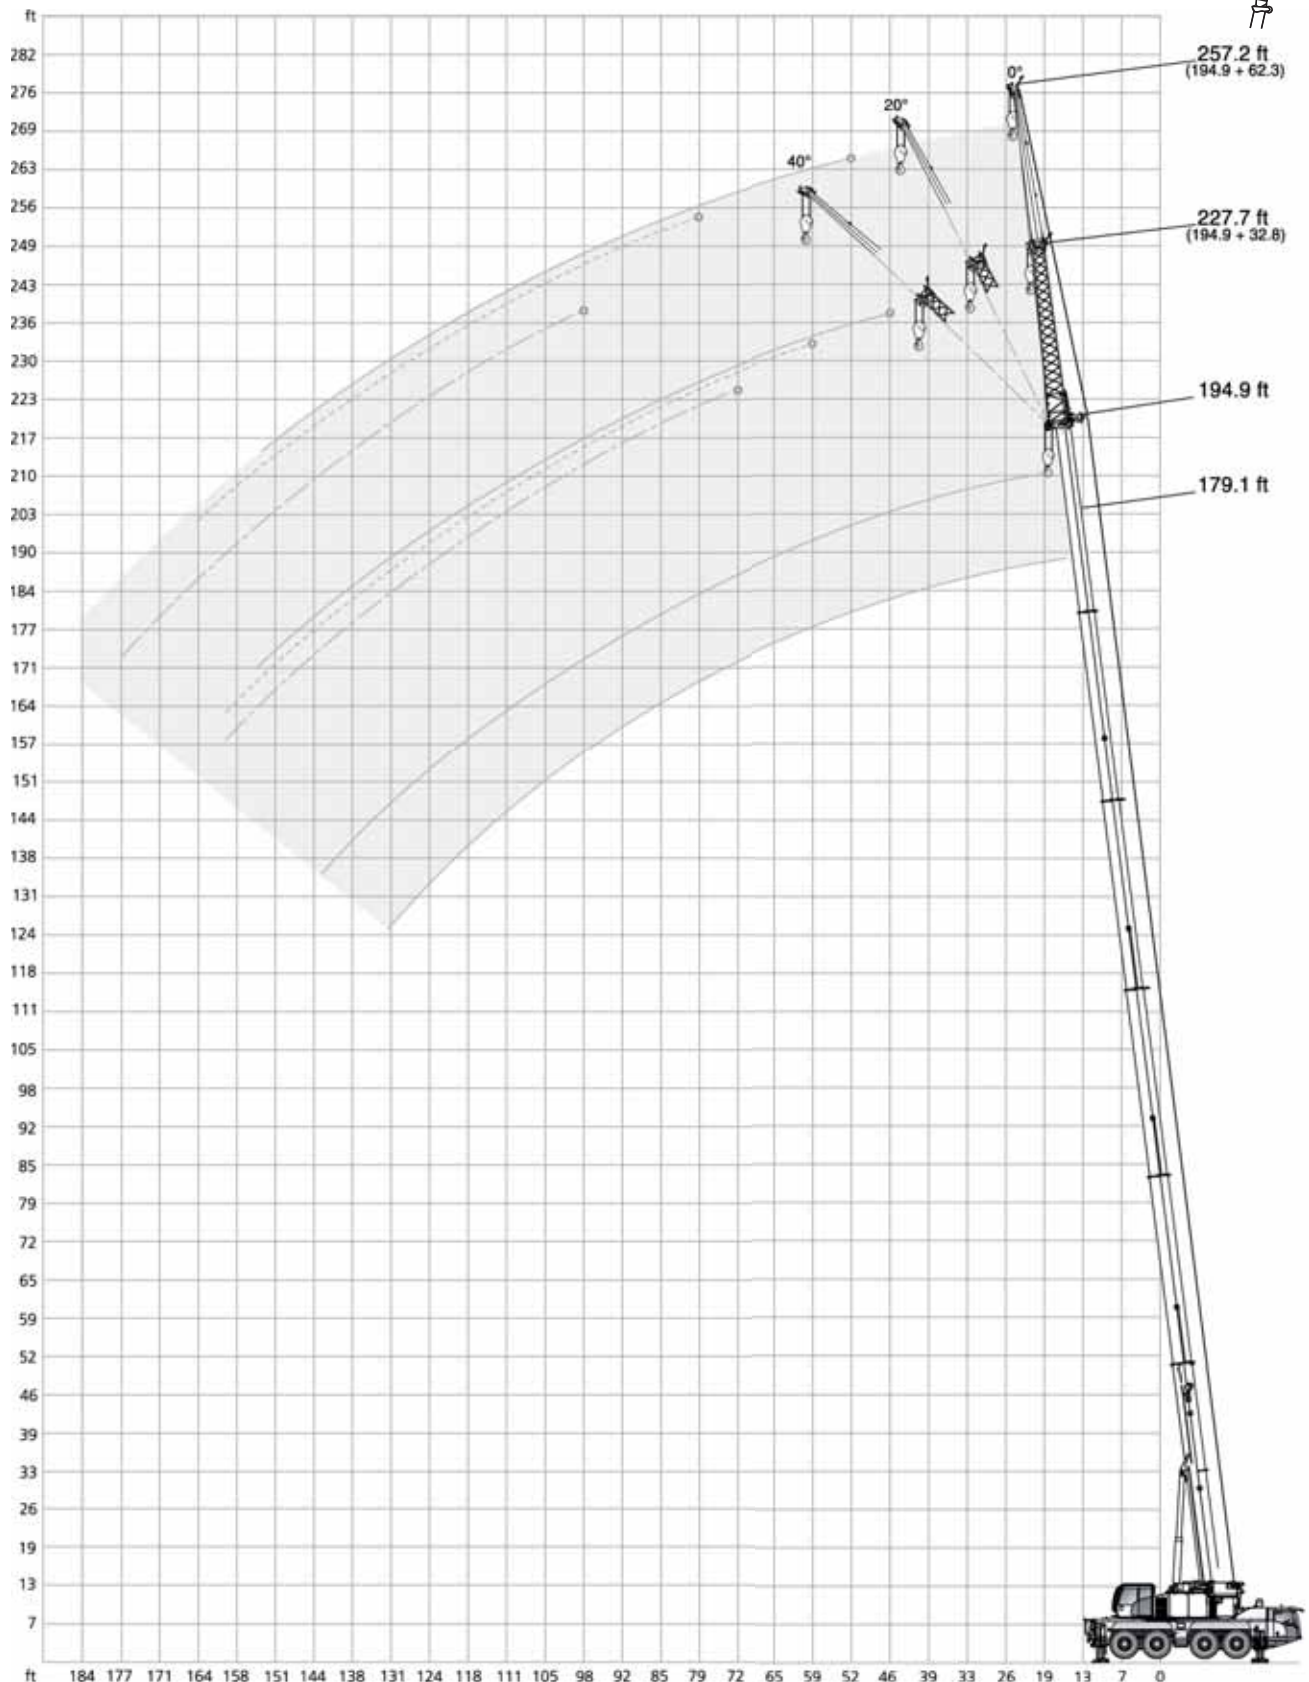

 54,000 lb								 26.6 ft x 23.6 ft								360°								85%									
 194.9 ft																						 179.1 ft											
 		32.8 ft			62.3 ft					32.8 ft			62.3 ft																				
		0°	20°	40°	0°	20°	40°*			0°	20°	40°	0°	20°	40°																		
ft		1,000 lb															ft		1,000 lb														
48		8.4	-	-	-	-	-	-		40		11.0	-	-	-	-	-	-															
56		8.4	-	-	-	4.9	-	-		48		11.0	-	-	-	6.4	-	-															
64		8.4	8.4	-	-	4.9	-	-		56		11.0	-	-	-	6.4	-	-															
72		8.4	8.4	-	-	4.9	-	-		64		11.0	11.0	-	-	6.4	-	-															
80		8.4	8.4	8.4	-	4.9	4.9	-		72		11.0	11.0	11.0	-	6.4	-	-															
88		8.4	8.4	8.4	-	4.9	4.9	-		80		11.0	11.0	11.0	-	6.4	6.4	-															
96		8.4	8.4	8.2	-	4.9	4.9	-		88		11.0	11.0	11.0	-	6.4	6.4	-															
104		8.4	8.0	7.8	-	4.9	4.9	5.1		96		10.7	11.0	10.7	-	6.4	6.4	6.4															
112		7.6	7.7	7.3	-	4.9	4.9	5.1		104		9.6	10.5	10.4	-	6.4	6.4	6.4															
120		6.4	7.0	6.9	-	4.9	4.9	4.9		112		8.1	8.9	9.6	-	6.4	6.4	6.2															
128		5.3	5.9	6.3	-	4.6	4.7	4.5		120		7.1	7.4	8.0	-	6.1	6.4	6.0															
136		4.2	4.9	5.3	-	3.9	4.5	4.2		128		6.1	6.3	6.5	-	5.5	6.3	5.8															
144		3.1	3.8	4.2	-	3.1	4.2	4.0		136		5.0	5.5	5.8	-	4.7	5.7	5.6															
152		2.3	3.0	3.2	-	2.3	3.4	3.7		144		4.0	4.5	4.9	-	4.2	4.7	5.5															
160		-	2.2	2.4	-	-	2.6	3.4		152		3.2	3.6	3.9	-	3.2	3.8	4.5															
168		-	-	-	-	-	-	2.7		160		2.5	2.8	3.1	-	2.6	3.4	3.6															
176		-	-	-	-	-	-	1.9		168		-	-	-	-	-	2.8	3.0															
										176		-	-	-	-	-	2.1	2.5															

 109.6 ft						
	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°
ft	1,000 lb					
20	29.1	-	-	-	-	-
24	28.7	-	-	14.7	-	-
28	28.2	-	-	14.6	-	-
32	27.7	-	-	14.4	-	-
36	27.1	24.4	-	14.2	-	-
40	26.6	23.2	19.1	14.1	-	-
48	25.4	21.1	18.0	13.8	-	-
56	23.9	19.5	16.8	13.4	12.1	-
64	21.8	18.1	16.0	13.1	11.6	-
72	19.9	16.8	15.2	12.8	11.0	8.6
80	17.7	15.7	14.5	12.3	10.3	8.3
88	15.0	14.9	13.9	11.6	9.7	8.1
96	13.2	13.4	13.4	10.8	9.2	7.9
104	11.7	11.7	12.0	10.2	8.9	7.7
112	10.0	10.5	-	9.4	8.3	7.7
120	8.8	8.9	-	8.7	7.9	7.4
128	8.2	4.5	-	7.8	7.6	7.3
136	4.1	-	-	6.9	7.1	7.3
144	-	-	-	5.8	6.4	2.9
152	-	-	-	5.0	4.5	-
160	-	-	-	2.3	-	-

 39.4 ft							
 ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
10		29.1	-	-	21.1	-	-
12		29.1	-	-	20.9	-	-
14		29.1	-	-	20.8	-	-
16		29.1	29.1	-	20.6	-	-
18		29.1	29.1	-	20.3	-	-
20		29.1	28.9	-	20.0	-	-
24		29.1	26.6	-	19.2	-	-
28		29.1	24.5	20.1	18.5	-	-
32		28.9	22.8	19.2	17.6	-	-
36		26.9	21.5	18.4	16.7	13.5	-
40		24.6	20.3	17.8	15.7	12.7	-
48		21.1	18.3	16.9	13.8	11.6	-
56		18.5	17.1	-	12.2	10.4	9.2
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.6	-	-

 * 191.9 ft

42,500 lb							26.6 ft x 23.6 ft						
194.9 ft													
 	32.8 ft			62.3 ft			 	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°*		0°	20°	40°	0°	20°	40°
ft	1,000 lb						ft	1,000 lb					
48	8.4	-	-	-	-	-	40	11.0	-	-	-	-	-
56	8.4	-	-	4.9	-	-	48	11.0	-	-	6.4	-	-
64	8.4	8.4	-	4.9	-	-	56	11.0	-	-	6.4	-	-
72	8.4	8.4	-	4.9	-	-	64	11.0	11.0	-	6.4	-	-
80	8.4	8.4	8.4	4.9	4.9	-	72	11.0	11.0	11.0	6.4	-	-
88	8.4	8.4	8.4	4.9	4.9	-	80	11.0	11.0	11.0	6.4	6.4	-
96	8.0	8.4	8.2	4.9	4.9	-	88	10.6	11.0	11.0	6.4	6.4	-
104	6.8	7.6	7.8	4.9	4.9	5.1	96	9.1	10.1	10.6	6.4	6.4	6.4
112	5.4	6.3	7.2	4.8	4.9	5.1	104	8.1	8.4	9.2	6.4	6.4	6.4
120	4.2	5.0	5.7	3.7	4.8	4.9	112	6.6	7.2	7.4	5.5	6.4	6.2
128	3.3	4.0	4.6	2.8	4.3	4.5	120	5.4	6.1	6.4	5.0	5.9	6.0
136	2.4	3.0	3.5	1.9	3.3	4.2	128	4.2	4.8	5.4	4.1	4.8	5.7
144	1.6	2.2	2.7	-	2.5	3.8	136	3.3	3.9	4.2	3.3	4.2	5.0
152	-	-	-	-	-	3.0	144	2.5	2.9	3.3	2.5	3.6	4.0
160	-	-	-	-	-	2.2	152	-	2.1	2.3	-	2.8	3.4
							160	-	-	-	-	2.0	2.6

 109.6 ft							
	32.8 ft			62.3 ft			
	0°	20°	40°	0°	20°	40°	
ft	1,000 lb						
20	29.1	-	-	-	-	-	
24	28.7	-	-	14.7	-	-	
28	28.2	-	-	14.6	-	-	
32	27.7	-	-	14.4	-	-	
36	27.1	24.4	-	14.2	-	-	
40	26.6	23.2	19.1	14.1	-	-	
48	25.4	21.1	18.0	13.8	-	-	
56	23.9	19.5	16.8	13.4	12.1	-	
64	21.7	18.1	16.0	13.1	11.6	-	
72	18.6	16.8	15.2	12.8	11.0	8.6	
80	15.9	15.5	14.5	12.3	10.3	8.3	
88	13.3	13.8	13.7	11.6	9.7	8.1	
96	11.2	11.9	12.3	10.8	9.2	7.9	
104	9.8	9.9	10.4	9.8	8.9	7.7	
112	8.5	8.8	-	8.5	8.3	7.7	
120	7.8	7.8	-	7.2	7.8	7.4	
128	7.2	4.5	-	6.4	6.9	7.2	
136	4.1	-	-	5.7	5.9	6.3	
144	-	-	-	4.9	5.3	2.9	
152	-	-	-	4.6	3.2	-	
160	-	-	-	2.3	-	-	

 39.4 ft							
	32.8 ft			62.3 ft			
	0°	20°	40°	0°	20°	40°	
ft	1,000 lb						
10	29.1	-	-	21.1	-	-	
12	29.1	-	-	20.9	-	-	
14	29.1	-	-	20.8	-	-	
16	29.1	29.1	-	20.6	-	-	
18	29.1	29.1	-	20.3	-	-	
20	29.1	28.9	-	20.0	-	-	
24	29.1	26.6	-	19.2	-	-	
28	29.1	24.5	20.1	18.5	-	-	
32	28.9	22.8	19.2	17.6	-	-	
36	26.9	21.5	18.4	16.7	13.5	-	
40	24.6	20.3	17.8	15.7	12.7	-	
48	21.1	18.3	16.9	13.8	11.6	-	
56	18.5	17.1	-	12.2	10.4	9.2	
64	-	-	-	11.0	9.6	8.7	
72	-	-	-	9.9	9.1	8.2	
80	-	-	-	9.2	8.6	-	
88	-	-	-	8.6	-	-	

 * 191.9 ft

19,000 lb							360°							85%						
194.9 ft							179.1 ft													
ft	32.8 ft			62.3 ft			ft	32.8 ft			62.3 ft			ft	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°*		0°	20°	40°	0°	20°	40°		0°	20°	40°	0°	20°	40°
1,000 lb							1,000 lb							1,000 lb						
48	8.4	-	-	-	-	-	40	11.0	-	-	-	-	-	48	11.0	-	-	6.4	-	-
56	8.4	-	-	4.9	-	-	48	11.0	-	-	6.4	-	-	56	11.0	-	-	6.4	-	-
64	8.4	8.4	-	4.9	-	-	56	11.0	-	-	6.4	-	-	64	10.9	11.0	-	6.4	-	-
72	7.7	8.4	-	4.9	-	-	64	9.5	10.4	11.0	6.4	-	-	72	9.5	10.4	11.0	6.4	-	-
80	5.7	7.2	8.1	4.6	4.9	-	72	7.2	8.7	9.3	5.9	6.4	-	80	7.2	8.7	9.3	5.9	6.4	-
88	4.0	5.4	6.4	3.3	4.9	-	80	5.4	6.6	7.7	4.8	6.1	-	88	5.4	6.6	7.7	4.8	6.1	-
96	2.6	3.8	4.8	2.1	4.2	-	88	3.9	5.0	6.0	3.5	5.4	6.4	96	3.9	5.0	6.0	3.5	5.4	6.4
104	-	2.6	3.5	-	3.0	4.9	96	2.8	3.7	4.6	2.3	4.1	5.5	104	2.8	3.7	4.6	2.3	4.1	5.5
112	-	-	-	-	-	3.7	104	-	2.6	3.2	-	3.0	4.6	112	-	2.6	3.2	-	3.0	4.6
120	-	-	-	-	-	2.6	120	-	-	2.2	-	-	3.3	120	-	-	2.2	-	-	3.3
							128	-	-	-	-	-	2.3	128	-	-	-	-	-	2.3

109.6 ft													
ft	32.8 ft			62.3 ft			ft	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°		0°	20°	40°	0°	20°	40°
1,000 lb							1,000 lb						
20	29.1	-	-	-	-	-	10	29.1	-	-	21.1	-	-
24	28.7	-	-	14.7	-	-	12	29.1	-	-	20.9	-	-
28	28.2	-	-	14.6	-	-	14	29.1	-	-	20.8	-	-
32	27.7	-	-	14.4	-	-	16	29.1	29.1	-	20.6	-	-
36	27.1	24.4	-	14.2	-	-	18	29.1	29.1	-	20.3	-	-
40	26.6	23.2	19.1	14.1	-	-	20	29.1	28.9	-	20.0	-	-
48	24.4	21.1	18.0	13.8	-	-	24	29.1	26.6	-	19.2	-	-
56	20.0	19.4	16.8	13.4	12.1	-	28	29.1	24.5	20.1	18.5	-	-
64	16.4	16.9	16.0	13.1	11.6	-	32	28.9	22.8	19.2	17.6	-	-
72	13.3	14.4	14.4	12.8	11.0	8.6	36	26.9	21.5	18.4	16.7	13.5	-
80	11.6	11.7	12.4	11.2	10.3	8.3	40	24.6	20.3	17.8	15.7	12.7	-
88	9.5	10.0	10.1	9.3	9.6	8.1	48	21.1	18.3	16.9	13.8	11.6	-
96	7.8	8.4	8.9	7.9	8.7	7.9	56	18.5	17.1	-	12.2	10.4	9.2
104	6.3	6.8	7.3	6.8	7.4	7.7	64	-	-	-	11.0	9.6	8.7
112	5.2	5.7	-	5.5	5.9	6.8	72	-	-	-	9.9	9.1	8.2
120	4.2	4.6	-	4.6	5.5	5.5	80	-	-	-	9.2	8.6	-
128	3.4	3.6	-	3.6	4.4	4.8	88	-	-	-	8.6	-	-
136	2.6	-	-	2.8	3.5	3.9							
144	-	-	-	2.2	2.7	2.9							
152	-	-	-	-	2.1	-							

 *191.9 ft

13,400 lb				 26.6 ft x 23.6 ft				360°				85 %			
 194.9 ft								 179.1 ft							
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°*			0°	20°	40°			
ft		1,000 lb						ft		1,000 lb					
48		8.4	-	-	-	-	-	40		11.0	-	-	-	-	-
56		8.4	-	-	4.9	-	-	48		11.0	-	-	6.4	-	-
64		8.0	8.4	-	4.9	-	-	56		11.0	-	-	6.4	-	-
72		6.0	7.5	-	4.9	-	-	64		9.7	10.7	-	6.4	-	-
80		3.9	5.5	6.9	3.3	4.9	-	72		7.5	9.1	10.1	6.0	-	-
88		2.4	3.9	5.0	-	4.3	-	80		5.5	7.0	8.1	4.8	6.3	-
96		-	2.4	3.4	-	2.8	-	88		4.0	5.2	6.2	3.3	5.5	-
104		-	-	2.1	-	-	3.7	96		2.6	3.7	4.6	2.1	4.2	5.7
112		-	-	-	-	-	2.6	104		-	2.4	3.3	-	2.8	4.6
								112		-	-	-	-	-	3.2
								120		-	-	-	-	-	2.2

 109.6 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
20		29.1	-	-	-	-	-
24		28.7	-	-	14.7	-	-
28		28.2	-	-	14.6	-	-
32		27.7	-	-	14.4	-	-
36		27.1	24.4	-	14.2	-	-
40		26.4	23.2	19.1	14.1	-	-
48		23.1	21.1	18.0	13.8	-	-
56		18.5	18.6	16.8	13.4	12.1	-
64		14.9	15.7	15.8	13.1	11.6	-
72		12.4	12.9	13.5	11.7	11.0	8.6
80		10.0	10.9	10.9	9.8	10.2	8.3
88		8.1	8.8	9.4	8.4	9.2	8.1
96		6.5	7.1	7.5	6.9	7.8	7.8
104		5.2	5.7	5.9	5.6	6.5	7.2
112		4.1	4.6	-	4.6	5.5	5.9
120		3.3	3.6	-	3.6	4.4	5.0
128		2.4	2.8	-	2.8	3.4	4.0
136		1.9	-	-	2.1	2.6	3.0
144		-	-	-	-	2.0	2.2

 *191.9 ft


 39.4 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
10		29.1	-	-	21.1	-	-
12		29.1	-	-	20.9	-	-
14		29.1	-	-	20.8	-	-
16		29.1	29.1	-	20.6	-	-
18		29.1	29.1	-	20.3	-	-
20		29.1	28.9	-	20.0	-	-
24		29.1	26.6	-	19.2	-	-
28		29.1	24.5	20.1	18.5	-	-
32		28.9	22.8	19.2	17.6	-	-
36		26.9	21.5	18.4	16.7	13.5	-
40		24.6	20.3	17.8	15.7	12.7	-
48		21.1	18.3	16.9	13.8	11.6	-
56		18.5	17.1	-	12.2	10.4	9.2
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.6	-	-

 9,500 lb								 26.6 ft x 23.6 ft								360°								85 %	
 194.9 ft																 179.1 ft									
 ft		32.8 ft			62.3 ft					32.8 ft			62.3 ft												
		0°	20°	40°	0°	20°	40°*			0°	20°	40°	0°	20°	40°										
1,000 lb								1,000 lb								1,000 lb									
48		8.4	-	-	-	-	-		40	11.0	-	-	-	-	-	-									
56		8.4	-	-	4.9	-	-		48	11.0	-	-	6.4	-	-										
64		6.7	8.2	-	4.9	-	-		56	10.4	-	-	6.4	-	-										
72		4.5	6.2	-	3.6	-	-		64	8.5	9.9	-	6.4	-	-										
80		2.7	4.2	5.7	-	4.6	-		72	6.0	7.8	9.1	5.3	-	-										
88		-	2.6	3.9	-	3.2	-		80	4.2	5.7	6.9	3.5	5.8	-										
96		-	-	2.4	-	-	-		88	2.7	4.0	5.0	2.2	4.5	-										
104		-	-	-	-	-	2.8		96	-	2.6	3.5	-	3.1	5.0										
									104	-	-	2.3	-	1.9	3.7										
									112	-	-	-	-	-	2.4										

 109.6 ft							
 ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
20		29.1	-	-	-	-	-
24		28.7	-	-	14.7	-	-
28		28.2	-	-	14.6	-	-
32		27.7	-	-	14.4	-	-
36		27.0	24.4	-	14.2	-	-
40		26.2	23.2	19.1	14.1	-	-
48		21.3	20.8	18.0	13.8	-	-
56		17.3	17.8	16.8	13.4	12.1	-
64		14.0	14.6	15.0	12.3	11.6	-
72		11.1	11.9	12.4	10.8	11.0	8.6
80		8.9	9.8	10.3	9.2	9.9	8.3
88		7.2	7.8	8.4	7.5	8.4	8.1
96		5.6	6.2	6.7	5.9	6.9	7.7
104		4.3	5.0	5.2	4.8	5.9	6.4
112		3.3	3.7	-	3.7	4.8	5.5
120		2.5	2.8	-	2.9	3.7	4.4
128		-	2.0	-	2.1	2.8	3.3
136		-	-	-	-	1.9	2.4
144		-	-	-	-	-	1.6

 * 191.9 ft

 39.4 ft							
 ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
10		29.1	-	-	21.1	-	-
12		29.1	-	-	20.9	-	-
14		29.1	-	-	20.8	-	-
16		29.1	29.1	-	20.6	-	-
18		29.1	29.1	-	20.3	-	-
20		29.1	28.9	-	20.0	-	-
24		29.1	26.6	-	19.2	-	-
28		29.1	24.5	20.1	18.5	-	-
32		28.9	22.8	19.2	17.6	-	-
36		26.9	21.5	18.4	16.7	13.5	-
40		24.6	20.3	17.8	15.7	12.7	-
48		21.1	18.3	16.9	13.8	11.6	-
56		17.6	16.9	-	12.2	10.4	9.2
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.5	-	-

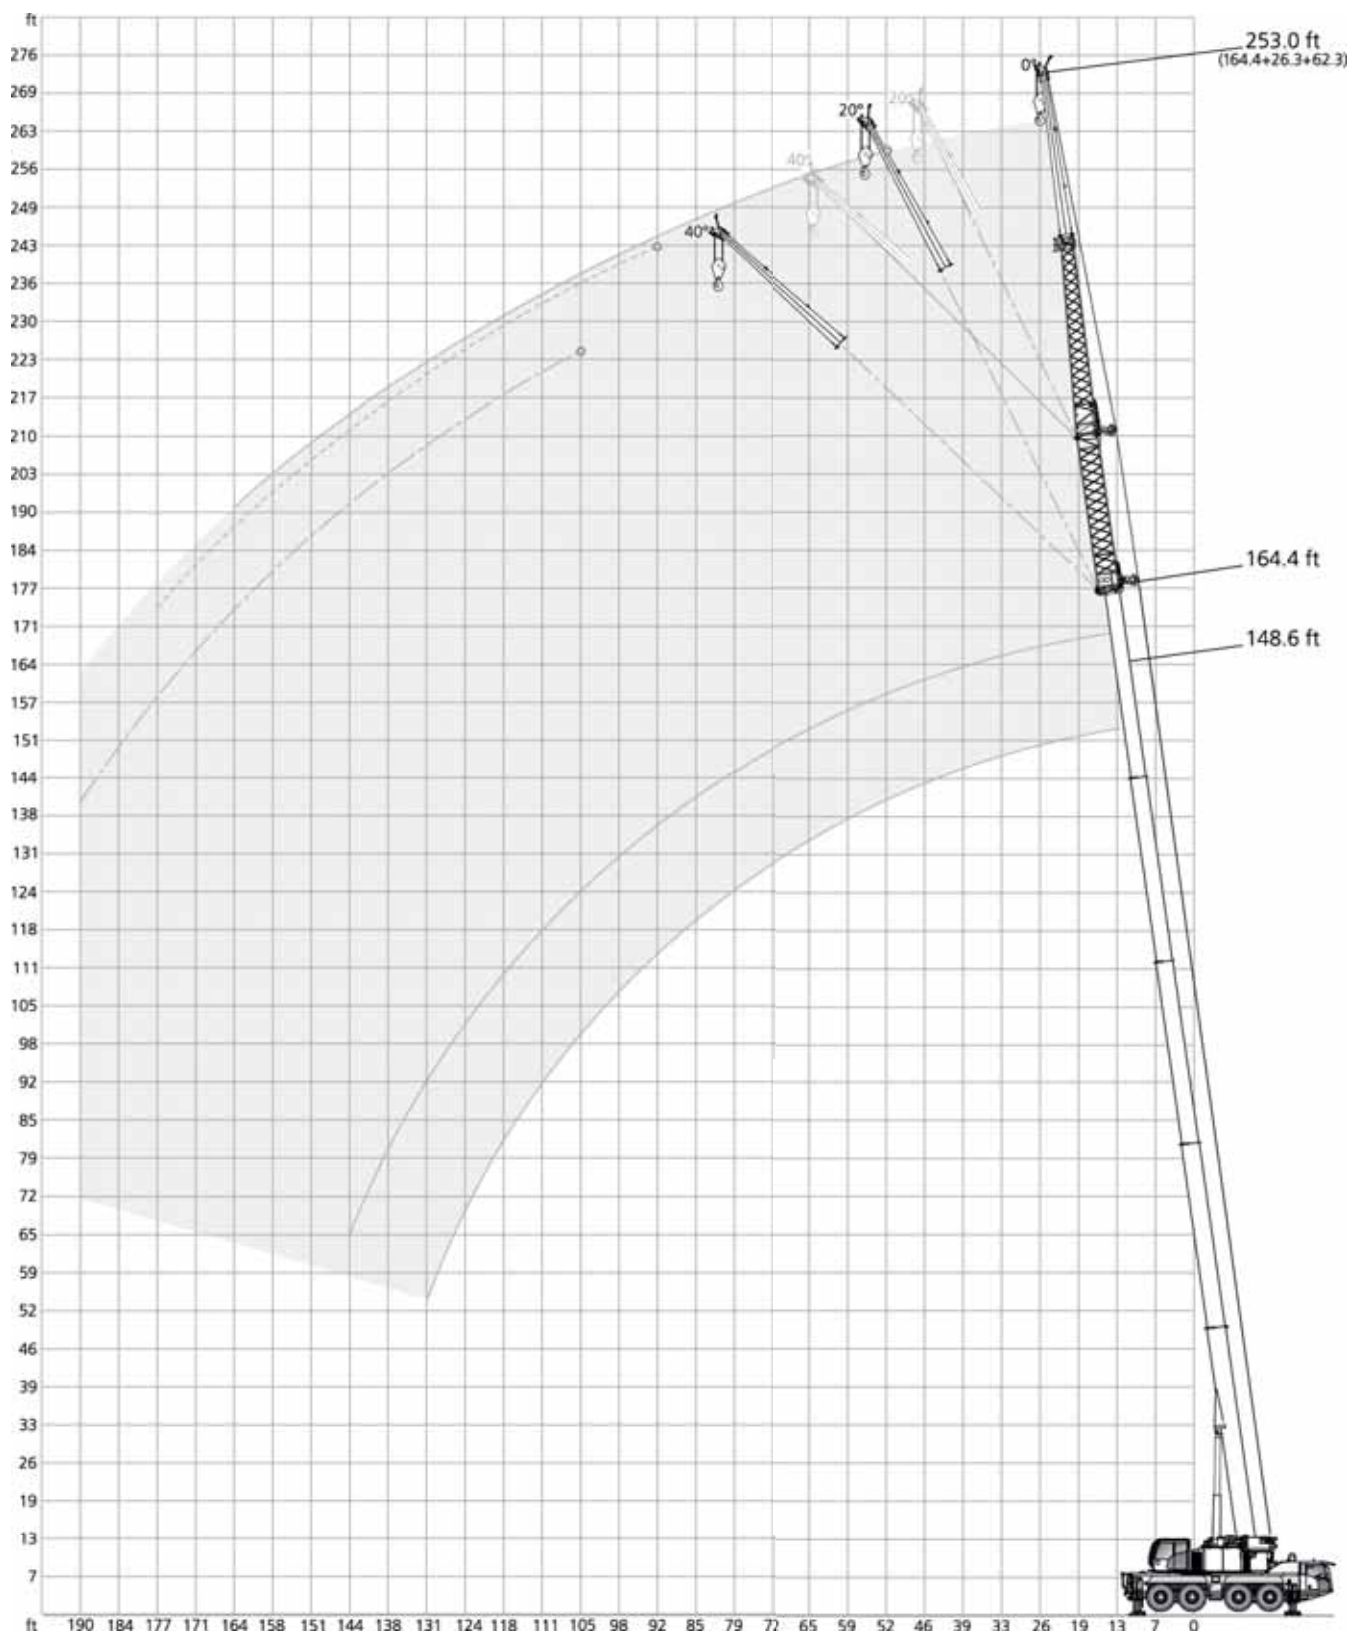

54,000 lb		26.6 ft x 23.6 ft		360°		85%	
 164.4 ft				 148.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°*	
ft		1,000 lb		ft		1,000 lb	
48		9.3	-	-	-	-	
56		9.3	-	-	-	-	
64		9.3	9.3	-	-	-	
72		9.3	9.3	-	-	-	
80		9.3	9.3	9.1	8.7	-	
88		9.3	9.0	8.4	8.1	7.1	
96		9.0	8.2	7.9	7.4	6.7	
104		8.3	7.6	7.3	6.9	6.2	
112		7.6	7.0	6.8	6.6	5.9	
120		6.3	6.5	6.3	6.1	5.7	
128		5.1	5.7	5.9	5.7	5.4	
136		4.0	4.7	5.1	5.0	5.1	
144		2.9	3.6	4.0	4.0	4.9	
152		2.1	2.8	3.0	3.0	3.8	
160		-	-	2.2	2.2	2.8	

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
24		25.4	-	-	-	-
28		24.6	-	-	-	-
32		23.6	-	-	-	-
36		22.5	19.1	-	-	-
40		21.4	18.2	-	-	-
48		19.4	16.6	14.7	14.3	-
56		17.7	15.3	13.8	13.2	-
64		16.0	14.1	12.9	12.3	10.0
72		14.6	13.0	12.1	11.5	9.7
80		13.5	12.2	11.4	10.9	9.2
88		12.5	11.4	10.8	10.3	8.9
96		11.7	10.7	10.3	9.9	8.7
104		10.9	10.2	10.0	9.3	8.4
112		9.9	9.7	9.7	8.8	8.4
120		8.8	9.0	5.0	8.5	8.2
128		7.9	7.9	-	7.9	4.5
136		6.9	7.1	-	7.2	-
144		5.8	4.0	-	4.0	-

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
10		29.1	-	-	-	-
12		29.1	-	-	-	-
14		29.1	-	-	-	-
16		29.1	-	-	-	-
18		29.1	-	-	-	-
20		28.9	24.3	-	-	-
24		26.0	22.2	-	-	-
28		23.4	20.2	-	-	-
32		21.2	18.6	16.8	16.4	-
36		19.3	17.3	15.8	15.3	-
40		17.7	16.1	14.9	14.4	-
48		15.3	14.1	13.3	12.8	11.0
56		13.4	12.4	11.9	11.4	10.0
64		12.0	11.2	11.0	10.5	9.4
72		10.6	10.2	10.2	9.5	8.8
80		9.6	9.4	-	9.0	-

 *161.1 ft

 42,500 lb		 26.6 ft x 23.6 ft				
 164.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°*
ft		1,000 lb				
48		9.3	-	-	-	-
56		9.3	-	-	-	-
64		9.3	9.3	-	-	-
72		9.3	9.3	-	-	-
80		9.3	9.3	9.1	8.7	-
88		9.3	9.0	8.4	8.1	7.1
96		8.3	8.2	7.9	7.4	6.7
104		6.6	7.6	7.3	6.9	6.2
112		5.2	6.1	6.8	6.6	5.9
120		4.2	5.0	5.6	5.6	5.7
128		3.1	4.0	4.4	4.4	5.2
136		2.2	2.9	3.3	3.3	4.2
144		-	2.0	2.5	2.5	3.1
152		-	-	-	-	2.3

		360°		85 %		
 148.6 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
40		11.7	-	-	-	-
48		11.7	-	-	-	-
56		11.7	-	-	-	-
64		11.7	11.7	-	-	-
72		11.7	11.7	11.3	10.8	-
80		11.6	11.4	10.9	10.3	8.8
88		10.7	10.9	10.5	10.0	8.5
96		8.9	10.0	10.2	9.6	8.2
104		7.8	8.2	9.0	8.7	8.2
112		6.3	6.8	7.4	7.2	7.9
120		5.2	5.9	6.0	5.9	6.9
128		4.0	4.6	5.2	5.1	5.4
136		3.0	3.7	4.0	4.0	4.6
144		2.2	2.7	3.1	3.1	3.6
152		-	-	2.1	2.1	2.7

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
		1,000 lb				
		ft				
24		25.4	-	-	-	-
28		24.6	-	-	-	-
32		23.6	-	-	-	-
36		22.5	19.1	-	-	-
40		21.4	18.2	-	-	-
48		19.4	16.6	14.7	14.3	-
56		17.7	15.3	13.8	13.2	-
64		16.0	14.1	12.9	12.3	10.0
72		14.6	13.0	12.1	11.5	9.7
80		13.5	12.2	11.4	10.9	9.2
88		12.4	11.4	10.8	10.3	8.9
96		11.2	10.7	10.3	9.9	8.7
104		10.1	10.0	10.0	9.3	8.4
112		8.5	9.0	9.0	8.8	8.3
120		7.4	7.7	5.0	7.9	8.0
128		6.6	6.7	-	6.7	4.5
136		5.5	5.8	-	5.9	-
144		4.9	4.0	-	4.0	-

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
		1,000 lb				
		ft				
10		29.1	-	-	-	-
12		29.1	-	-	-	-
14		29.1	-	-	-	-
16		29.1	-	-	-	-
18		29.1	-	-	-	-
20		28.9	24.3	-	-	-
24		26.0	22.2	-	-	-
28		23.4	20.2	-	-	-
32		21.2	18.6	16.8	16.4	-
36		19.3	17.3	15.8	15.3	-
40		17.7	16.1	14.9	14.4	-
48		15.3	14.1	13.3	12.8	11.0
56		13.4	12.4	11.9	11.4	10.0
64		12.0	11.2	11.0	10.5	9.4
72		10.6	10.2	10.2	9.5	8.8
80		9.6	9.4	-	9.0	-

 *161.1 ft

19,000 lb		26.6 ft x 23.6 ft		360°		85 %	
 164.4 ft				 148.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°*	
		1,000 lb		1,000 lb			
		ft		ft			
48		9.3	-	-	-	-	
56		9.3	-	-	-	-	
64		9.3	9.3	-	-	-	
72		7.8	9.3	-	-	-	
80		5.7	7.2	8.5	8.3	-	
88		3.9	5.2	6.4	6.2	7.1	
96		2.5	3.7	4.7	4.6	6.3	
104		-	2.4	3.3	3.3	5.0	
112		-	-	-	-	3.7	
120		-	-	-	-	2.4	

 95.5 ft				 39.4 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
		1,000 lb		1,000 lb			
		ft		ft			
24		25.4	-	-	-	-	
28		24.6	-	-	-	-	
32		23.6	-	-	-	-	
36		22.5	19.1	-	-	-	
40		21.4	18.2	-	-	-	
48		19.4	16.6	14.7	14.3	-	
56		17.7	15.3	13.8	13.2	-	
64		15.5	14.1	12.9	12.3	10.0	
72		13.7	13.0	12.1	11.5	9.7	
80		11.1	11.6	11.3	10.7	9.2	
88		9.0	9.9	10.1	9.8	8.9	
96		7.2	8.0	8.5	8.4	8.5	
104		5.9	6.4	6.8	6.8	7.4	
112		4.6	5.2	5.4	5.5	6.1	
120		3.6	4.0	4.2	4.4	4.8	
128		2.8	3.1	-	3.3	3.5	
136		2.1	2.2	-	2.4	-	
144		-	-	-	1.6	-	

 *161.1 ft							
---	--	--	--	--	--	--	--

13,400 lb		26.6 ft x 23.6 ft		360°		85%	
164.4 ft				148.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°*	
		1,000 lb		1,000 lb			
		ft		ft			
48		9.3	-	-	-	-	
56		9.3	-	-	-	-	
64		8.1	9.3	-	-	-	
72		5.8	7.5	-	-	-	
80		3.9	5.4	6.8	6.5	-	
88		2.4	3.6	5.0	4.7	6.7	
96		-	2.3	3.4	3.3	5.1	
104		-	-	2.1	1.9	3.7	
112		-	-	-	-	2.4	

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
24		25.4	-	-	-	-
28		24.6	-	-	-	-
32		23.6	-	-	-	-
36		22.5	19.1	-	-	-
40		21.4	18.2	-	-	-
48		19.4	16.6	14.7	14.3	-
56		17.2	15.3	13.8	13.2	-
64		14.8	14.1	12.9	12.3	10.0
72		12.0	12.6	12.1	11.5	9.7
80		9.6	10.5	10.9	10.5	9.2
88		7.6	8.4	9.1	9.0	8.8
96		6.0	6.7	7.2	7.1	7.9
104		4.6	5.2	5.7	5.7	6.4
112		3.5	4.1	4.3	4.3	5.0
120		2.7	3.1	3.3	3.3	3.7
128		1.9	2.1	-	2.3	2.6

		39.4 ft				
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
10		29.1	-	-	-	-
12		29.1	-	-	-	-
14		29.1	-	-	-	-
16		29.1	-	-	-	-
18		29.1	-	-	-	-
20		28.9	24.3	-	-	-
24		26.0	22.2	-	-	-
28		23.4	20.2	-	-	-
32		21.2	18.6	16.8	16.4	-
36		19.3	17.3	15.8	15.3	-
40		17.7	16.1	14.9	14.4	-
48		15.3	14.1	13.3	12.8	11.0
56		13.4	12.4	11.9	11.4	10.0
64		12.0	11.2	11.0	10.5	9.4
72		10.6	10.2	10.2	9.5	8.8
80		9.6	9.4	-	9.0	-

*161.1 ft

 9,500 lb		 26.6 ft x 23.6 ft		360°		85%		
 164.4 ft				 148.6 ft				
 	26.3 ft							
	0°	0°	0°	20°	40°			
	62.3 ft							
	0°	20°	40°	0°	0°*			
ft		1,000 lb						
48	9.3	-	-	-	-			
56	8.9	-	-	-	-			
64	6.8	8.4	-	-	-			
72	4.5	6.2	-	-	-			
80	2.6	4.2	5.4	5.3	-			
88	-	2.6	3.6	3.6	5.8			
96	-	-	2.3	2.2	4.2			
104	-	-	-	-	2.8			

 		26.3 ft						
0°	0°	0°	20°	40°				
62.3 ft								
0°	20°	40°	0°	0°				
ft		1,000 lb						
40	11.7	-	-	-	-			
48	11.7	-	-	-	-			
56	10.9	11.5	-	-	-			
64	8.5	10.1	-	-	-			
72	6.0	7.6	9.1	8.8	-			
80	4.2	5.7	6.8	6.5	8.3			
88	2.6	3.9	5.0	4.7	6.6			
96	-	2.5	3.5	3.3	4.9			
104	-	-	2.2	2.1	3.5			

 95.5 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft		1,000 lb				
24	25.4	-	-	-	-	
28	24.6	-	-	-	-	
32	23.6	-	-	-	-	
36	22.5	19.1	-	-	-	
40	21.4	18.2	-	-	-	
48	18.9	16.6	14.7	14.3	-	
56	16.4	15.3	13.8	13.2	-	
64	13.7	13.7	12.9	12.3	10.0	
72	10.6	11.7	11.9	11.5	9.7	
80	8.3	9.4	10.2	9.8	9.2	
88	6.5	7.4	8.0	7.8	8.5	
96	5.0	5.8	6.2	6.2	7.1	
104	3.7	4.4	4.8	4.8	5.5	
112	2.8	3.2	3.5	3.5	4.1	
120	-	2.2	2.5	2.6	3.1	
128	-	-	-	-	2.0	

 39.4 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lb					
10	29.1	-	-	-	-	
12	29.1	-	-	-	-	
14	29.1	-	-	-	-	
16	29.1	-	-	-	-	
18	29.1	-	-	-	-	
20	28.9	24.3	-	-	-	
24	26.0	22.2	-	-	-	
28	23.4	20.2	-	-	-	
32	21.2	18.6	16.8	16.4	-	
36	19.3	17.3	15.8	15.3	-	
40	17.7	16.1	14.9	14.4	-	
48	15.3	14.1	13.3	12.8	11.0	
56	13.4	12.4	11.9	11.4	10.0	
64	12.0	11.2	11.0	10.5	9.4	
72	10.6	10.2	10.2	9.5	8.8	
80	9.4	9.3	-	9.0	-	

*161.1 ft

54,000 lb		26.6 ft x 23.6 ft		360°		85%	
 164.4 ft				 148.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°*	40°*	0°	0°	
		1,000 lb		1,000 lb			
		ft					
56	5.5	-	-	-	-	-	
64	5.5	-	-	-	-	-	
72	5.5	-	-	-	-	-	
80	5.5	5.7	-	-	-	-	
88	5.5	5.7	-	-	-	-	
96	5.5	5.7	-	-	-	-	
104	5.5	5.5	5.1	-	-	-	
112	5.5	5.1	4.8	-	-	-	
120	5.2	4.8	4.5	-	-	-	
128	4.7	4.4	4.1	-	-	-	
136	3.8	4.0	3.8	-	-	-	
144	2.9	3.8	3.5	-	-	-	
152	2.1	3.4	3.3	-	-	-	
160	-	2.6	3.2	-	-	-	
168	-	-	2.7	-	-	-	
176	-	-	1.9	-	-	-	

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
28	13.4	-	-	-	-	-
32	13.4	-	-	-	-	-
36	13.2	-	-	-	-	-
40	12.9	-	-	-	-	-
48	12.1	-	-	-	-	-
56	11.3	10.0	-	-	-	-
64	10.5	9.2	-	8.3	-	-
72	9.9	8.6	7.7	7.7	-	-
80	9.1	8.1	7.2	7.2	-	-
88	8.4	7.5	6.9	6.7	5.6	-
96	7.9	7.0	6.5	6.3	5.2	-
104	7.3	6.6	6.2	6.0	4.9	-
112	6.8	6.2	5.9	5.7	4.8	-
120	6.3	5.9	5.7	5.2	4.6	-
128	5.9	5.6	5.4	5.0	4.4	-
136	5.6	5.2	5.1	4.7	4.4	-
144	5.1	5.1	5.1	4.6	4.4	-
152	4.8	4.8	2.6	4.4	-	-
160	4.5	4.6	-	4.4	-	-

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
14		17.9	-	-	-	-
16		17.9	-	-	-	-
18		17.8	-	-	-	-
20		17.6	-	-	-	-
24		16.8	-	-	-	-
28		16.0	-	-	-	-
32		15.2	-	-	-	-
36		14.2	-	-	-	-
40		13.3	12.0	-	-	-
48		11.7	10.5	-	9.6	-
56		10.2	9.4	8.7	8.6	-
64		9.0	8.4	7.9	7.7	-
72		8.2	7.5	7.1	7.1	-
80		7.4	6.7	6.5	6.3	5.6
88		6.6	6.2	6.1	5.8	5.2
96		5.9	5.7	5.7	5.2	4.9
104		5.4	5.3	-	4.9	4.7
112		4.8	-	-	-	-

 *161.1 ft **137.5 ft

42,500 lb		26.6 ft x 23.6 ft		360°		85 %	
164.4 ft				148.6 ft			
		26.3 ft				26.3 ft	
		0°	0°	0°	20°	40°	
		32.8 ft				32.8 ft	
		0°	20°*	40°*	0°	0°	
ft		1,000 lb				1,000 lb	
56	5.5	-	-	-	-	-	-
64	5.5	-	-	-	-	-	-
72	5.5	-	-	-	-	-	-
80	5.5	5.7	-	-	-	-	-
88	5.5	5.7	-	-	-	-	-
96	5.5	5.7	-	-	-	-	-
104	5.5	5.5	5.1	-	-	-	-
112	4.8	5.1	4.8	-	-	-	-
120	3.7	4.8	4.5	-	-	-	-
128	2.8	4.3	4.1	-	-	-	-
136	1.9	3.5	3.8	-	-	-	-
144	-	2.7	3.5	-	-	-	-
152	-	-	2.8	-	-	-	-
160	-	-	2.0	-	-	-	-

148.6 ft				148.6 ft			
		26.3 ft				26.3 ft	
		0°	0°	0°	20°	40°	
		32.8 ft				32.8 ft	
		0°	20°	40°	0°	0°**	
ft		1,000 lb				1,000 lb	
48	6.8	-	-	-	-	-	-
56	6.8	-	-	-	-	-	-
64	6.8	-	-	-	-	-	-
72	6.8	-	-	-	-	-	-
80	6.8	6.8	-	-	-	-	-
88	6.8	6.7	-	6.0	-	-	-
96	6.8	6.5	6.0	5.8	-	-	-
104	6.6	6.2	5.8	5.5	4.9	-	-
112	5.5	5.9	5.7	5.5	4.8	-	-
120	4.9	5.6	5.4	5.2	4.6	-	-
128	4.0	4.8	5.3	5.0	4.4	-	-
136	3.0	3.9	4.8	4.2	4.2	-	-
144	2.4	3.5	3.8	3.3	4.2	-	-
152	-	2.5	3.2	2.5	3.4	-	-
160	-	-	2.4	-	2.4	-	-



95.5 ft

 	26.3 ft				
	0°	0°	0°	20°	40°
	32.8 ft				
	0°	20°	40°	0°	0°
ft	1,000 lb				
28	13.4	-	-	-	-
32	13.4	-	-	-	-
36	13.2	-	-	-	-
40	12.9	-	-	-	-
48	12.1	-	-	-	-
56	11.3	10.0	-	-	-
64	10.5	9.2	-	8.3	-
72	9.9	8.6	7.7	7.7	-
80	9.1	8.1	7.2	7.2	-
88	8.4	7.5	6.9	6.7	5.6
96	7.9	7.0	6.5	6.3	5.2
104	7.3	6.6	6.2	6.0	4.9
112	6.8	6.2	5.9	5.7	4.8
120	6.3	5.9	5.7	5.2	4.6
128	5.8	5.6	5.4	5.0	4.4
136	5.4	5.1	5.1	4.7	4.4
144	4.9	4.9	5.1	4.6	4.4
152	4.3	4.6	2.6	4.4	-
160	3.6	3.9	-	4.0	-

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
14		17.9	-	-	-	-
16		17.9	-	-	-	-
18		17.8	-	-	-	-
20		17.6	-	-	-	-
24		16.8	-	-	-	-
28		16.0	-	-	-	-
32		15.2	-	-	-	-
36		14.2	-	-	-	-
40		13.3	12.0	-	-	-
48		11.7	10.5	-	9.6	-
56		10.2	9.4	8.7	8.6	-
64		9.0	8.4	7.9	7.7	-
72		8.2	7.5	7.1	7.1	-
80		7.4	6.7	6.5	6.3	5.6
88		6.6	6.2	6.1	5.8	5.2
96		5.9	5.7	5.7	5.2	4.9
104		5.4	5.3	-	4.9	4.7
112		4.8	-	-	-	-

 *161.1 ft **137.5 ft

19,000 lb						26.6 ft x 23.6 ft						360°						85%					
 164.4 ft												 148.6 ft											
						26.3 ft						26.3 ft											
						0° 0° 0° 20° 40°						0° 0° 0° 20° 40°											
						32.8 ft						32.8 ft											
						0° 20°* 40°* 0° 0°						0° 20° 40° 0° 0°**											
ft						1,000 lb						ft						1,000 lb					
56	5.5	-	-	-	-							48	6.8	-	-	-	-						
64	5.5	-	-	-	-							56	6.8	-	-	-	-						
72	5.5	-	-	-	-							64	6.8	-	-	-	-						
80	5.0	5.7	-	-	-							72	6.8	-	-	-	-						
88	3.3	5.6	-	-	-							80	6.4	6.8	-	-	-						
96	2.0	4.6	-	-	-							88	4.8	6.4	-	-	6.0	-					
104	-	3.3	4.9	-	-							96	3.5	5.5	6.0	5.5	-						
112	-	-	3.7	-	-							104	2.3	4.1	5.2	4.2	4.9						
120	-	-	2.6	-	-							112	-	3.0	4.6	3.0	4.8						
												120	-	-	3.3	-	4.2						
												128	-	-	2.3	-	3.1						
												136	-	-	-	-	2.0						

 95.5 ft												 39.4 ft											
						26.3 ft						26.3 ft											
						0° 0° 0° 20° 40°						0° 0° 0° 20° 40°											
						32.8 ft						32.8 ft											
						0° 20° 40° 0° 0°						0° 20° 40° 0° 0°											
ft						1,000 lb						ft						1,000 lb					
28	13.4	-	-	-	-							14	17.9	-	-	-	-						
32	13.4	-	-	-	-							16	17.9	-	-	-	-						
36	13.2	-	-	-	-							18	17.8	-	-	-	-						
40	12.9	-	-	-	-							20	17.6	-	-	-	-						
48	12.1	-	-	-	-							24	16.8	-	-	-	-						
56	11.3	10.0	-	-	-							28	16.0	-	-	-	-						
64	10.5	9.2	-	8.3	-							32	15.2	-	-	-	-						
72	9.9	8.6	7.7	7.7	-							36	14.2	-	-	-	-						
80	9.1	8.1	7.2	7.2	-							40	13.3	12.0	-	-	-						
88	8.2	7.5	6.9	6.7	5.6							48	11.7	10.5	-	9.6	-						
96	7.3	7.0	6.5	6.3	5.2							56	10.2	9.4	8.7	8.6	-						
104	6.1	6.5	6.2	6.0	4.9							64	9.0	8.4	7.9	7.7	-						
112	5.0	5.9	5.9	5.5	4.8							72	8.2	7.5	7.1	7.1	-						
120	4.0	5.0	5.4	5.1	4.6							80	7.4	6.7	6.5	6.3	5.6						
128	3.1	4.0	4.6	4.2	4.3							88	6.6	6.2	6.1	5.8	5.2						
136	2.3	3.0	3.5	3.3	3.5							96	5.9	5.7	5.7	5.2	4.9						
144	1.6	2.2	2.7	2.5	2.5							104	5.4	5.3	-	4.9	4.7						
												112	4.8	-	-	-	-						

 *161.1 ft **137.5 ft

13,400 lb		26.6 ft x 23.6 ft		360°		85%	
 164.4 ft				 148.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°*	40°*	0°	0°	
		1,000 lb		1,000 lb			
		ft		ft		ft	
56		5.5	-	-	-	-	
64		5.5	-	-	-	-	
72		5.1	-	-	-	-	
80		3.3	5.6	-	-	-	
88		-	4.5	-	-	-	
96		-	3.1	-	-	-	
104		-	1.9	3.7	-	-	
112		-	-	2.6	-	-	
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°**	
		1,000 lb		1,000 lb			
		ft		ft		ft	
48		6.8	-	-	-	-	
56		6.8	-	-	-	-	
64		6.8	-	-	-	-	
72		6.6	-	-	-	-	
80		4.8	6.6	-	-	-	
88		3.3	5.6	-	5.6	-	
96		2.1	4.2	5.6	4.4	-	
104		-	2.8	4.6	3.0	4.9	
112		-	-	3.2	-	4.3	
120		-	-	2.2	-	3.1	
128		-	-	-	-	2.0	


 95.5 ft				 39.4 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
		1,000 lb		1,000 lb			
		ft		ft		ft	
28		13.4	-	-	-	-	
32		13.4	-	-	-	-	
36		13.2	-	-	-	-	
40		12.9	-	-	-	-	
48		12.1	-	-	-	-	
56		11.3	10.0	-	-	-	
64		10.5	9.2	-	8.3	-	
72		9.9	8.6	7.7	7.7	-	
80		8.8	8.1	7.2	7.2	-	
88		7.7	7.5	6.9	6.7	5.6	
96		6.4	6.9	6.5	6.3	5.2	
104		5.0	6.2	6.0	5.8	4.9	
112		3.9	5.0	5.7	5.2	4.8	
120		2.9	3.9	4.8	4.2	4.5	
128		2.2	3.0	3.7	3.2	3.7	
136		-	2.2	2.7	2.4	2.7	
144		-	-	1.8	1.6	1.8	

 *161.1 ft		 **137.5 ft	
---	--	--	--

9,500 lb		26.6 ft x 23.6 ft		360°		85%	
164.4 ft				148.6 ft			
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°*	40°*	0°	0°	
		1,000 lb					
		ft					
56		5.5	-	-	-	-	
64		5.3	-	-	-	-	
72		3.8	-	-	-	-	
80		-	5.2	-	-	-	
88		-	3.4	-	-	-	
96		-	2.1	-	-	-	
104		-	-	2.8	-	-	

95.5 ft				39.4 ft			
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
		1,000 lb					
		ft					
28		13.4	-	-	-	-	
32		13.4	-	-	-	-	
36		13.2	-	-	-	-	
40		12.9	-	-	-	-	
48		12.1	-	-	-	-	
56		11.3	10.0	-	-	-	
64		10.5	9.2	-	8.3	-	
72		9.5	8.6	7.7	7.7	-	
80		8.3	8.1	7.2	7.2	-	
88		6.7	7.3	6.9	6.7	5.6	
96		5.3	6.6	6.5	6.3	5.2	
104		4.1	5.5	6.0	5.6	4.9	
112		3.0	4.3	5.2	4.6	4.8	
120		2.2	3.3	3.9	3.5	4.2	
128		-	2.3	3.0	2.5	3.1	
136		-	-	2.2	1.7	2.0	

*161.1 ft		**137.5 ft					
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
		1,000 lb					
		ft					
14		17.9	-	-	-	-	
16		17.9	-	-	-	-	
18		17.8	-	-	-	-	
20		17.6	-	-	-	-	
24		16.8	-	-	-	-	
28		16.0	-	-	-	-	
32		15.2	-	-	-	-	
36		14.2	-	-	-	-	
40		13.3	12.0	-	-	-	
48		11.7	10.5	-	9.6	-	
56		10.2	9.4	8.7	8.6	-	
64		9.0	8.4	7.9	7.7	-	
72		8.2	7.5	7.1	7.1	-	
80		7.4	6.7	6.5	6.3	5.6	
88		6.6	6.2	6.1	5.8	5.2	
96		5.9	5.7	5.7	5.2	4.9	
104		5.4	5.3	-	4.9	4.7	
112		4.8	-	-	-	-	

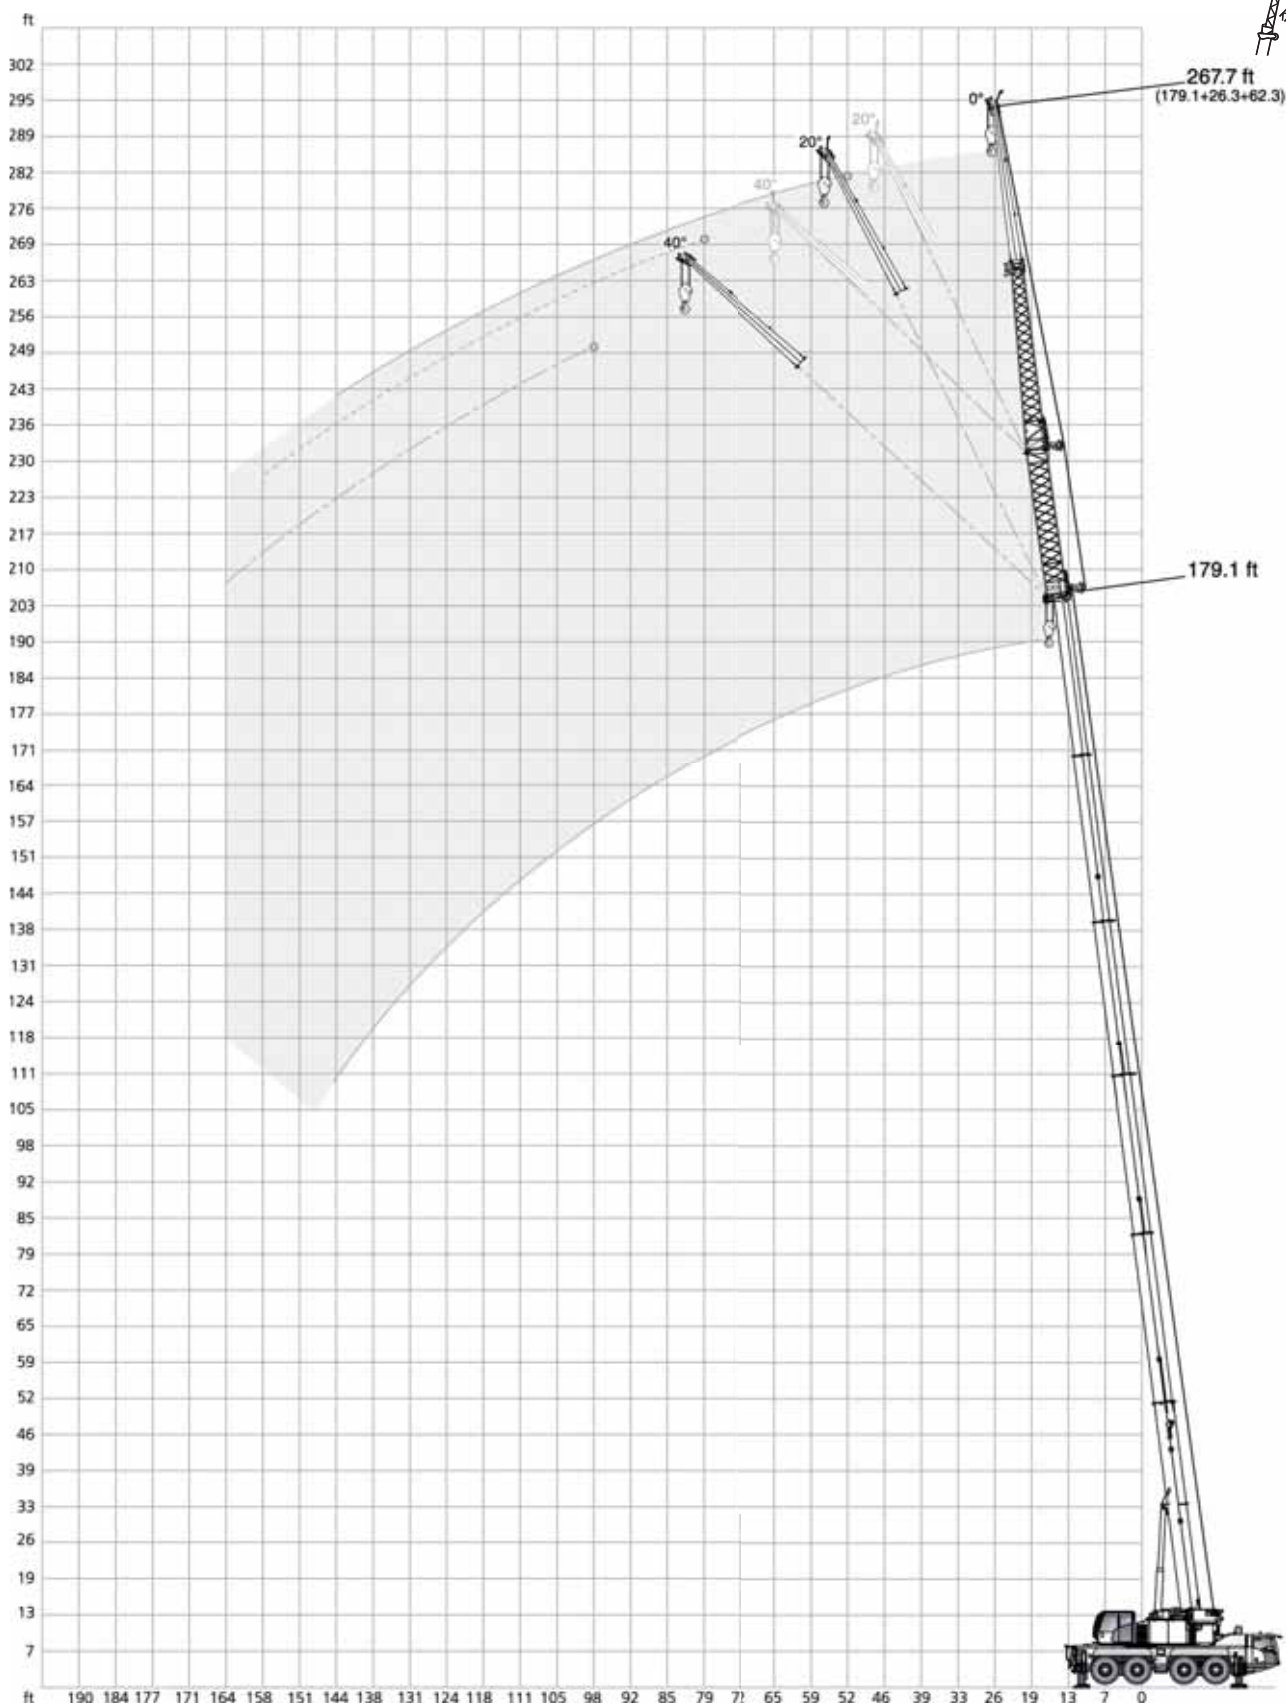

54,000 lb		 26.6 ft x 23.6 ft					360°		85%				
 194.9 ft		26.3 ft					 179.1 ft		26.3 ft				
		0°	0°	0°	20°	40°			0°	0°	0°	20°	40°
		62.3 ft							62.3 ft				
		0°	20°	40°*	0°	0°			0°	20°	40°	0°	0°
ft		1,000 lb					ft		1,000 lb				
56		4.6	-	-	-	-	48		6.6	-	-	-	-
64		4.6	-	-	-	-	56		6.6	-	-	-	-
72		4.6	4.6	-	-	-	64		6.6	-	-	-	-
80		4.6	4.6	5.1	-	-	72		6.6	6.6	-	-	-
88		4.6	4.6	5.1	-	-	80		6.6	6.6	6.6	6.6	-
96		4.6	4.6	5.1	-	-	88		6.5	6.6	6.6	6.6	-
104		4.6	4.6	5.1	-	-	96		6.4	6.5	6.6	6.5	6.5
112		4.6	4.6	5.0	-	-	104		6.4	6.4	6.6	6.4	6.0
120		4.4	4.6	4.6	-	-	112		6.1	6.2	6.4	6.2	5.7
128		3.5	4.2	4.2	-	-	120		5.3	6.0	6.3	6.1	5.7
136		2.6	3.5	3.8	-	-	128		4.2	5.1	5.7	5.6	5.4
144		1.8	2.5	3.3	-	-	136		3.8	4.0	4.7	4.7	5.1
152		-	-	2.5	-	-	144		2.9	3.3	3.6	3.6	4.2
							152		2.1	2.8	3.0	2.5	3.2
							160		-	-	2.2	-	2.4

		109.6 ft				
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lb				
24	18.4	-	-	-	-	-
28	18.1	-	-	-	-	-
32	17.7	-	-	-	-	-
36	17.4	-	-	-	-	-
40	17.2	16.9	-	-	-	-
48	16.5	16.0	14.5	13.9	-	-
56	15.9	15.0	13.5	13.1	-	-
64	15.2	13.9	12.6	12.1	-	-
72	14.1	12.6	11.7	11.3	9.5	-
80	13.0	11.7	10.9	10.5	9.0	-
88	11.8	10.8	10.2	9.7	8.5	-
96	10.8	9.9	9.6	9.2	8.1	-
104	10.0	9.3	9.1	8.7	7.7	-
112	9.0	8.8	8.6	8.1	7.5	-
120	7.7	8.1	7.9	7.7	7.2	-
128	6.8	7.2	7.2	7.1	6.9	-
136	5.8	6.0	2.3	6.2	6.5	-
144	4.7	4.9	-	5.1	-	-
152	4.3	-	-	-	-	-

 *191.9 ft

 42,500 lb		 26.6 ft x 23.6 ft		360°		85%	
 194.9 ft						 179.1 ft	
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°*	0°	0°	
ft		1,000 lb					
56		4.6	-	-	-	-	
64		4.6	-	-	-	-	
72		4.6	4.6	-	-	-	
80		4.6	4.6	5.1	-	-	
88		4.6	4.6	5.1	-	-	
96		4.6	4.6	5.1	-	-	
104		4.6	4.6	5.1	-	-	
112		3.7	4.6	5.0	-	-	
120		2.6	3.5	4.4	-	-	
128		-	2.5	3.4	-	-	
136		-	-	2.4	-	-	

 179.1 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lb					
48		6.6	-	-	-	-	
56		6.6	-	-	-	-	
64		6.6	-	-	-	-	
72		6.6	6.6	-	-	-	
80		6.6	6.6	6.6	6.6	-	
88		6.5	6.6	6.6	6.6	-	
96		6.4	6.5	6.6	6.5	6.5	
104		5.6	6.4	6.6	6.4	6.0	
112		5.0	5.4	6.3	6.1	5.7	
120		3.9	4.4	5.0	4.8	5.7	
128		2.9	3.6	4.1	3.7	5.0	
136		1.9	2.7	3.3	2.7	3.8	
144		-	1.8	2.5	1.8	2.7	

 109.6 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lb					
24	18.4	-	-	-	-	
28	18.1	-	-	-	-	
32	17.7	-	-	-	-	
36	17.4	-	-	-	-	
40	17.2	16.9	-	-	-	
48	16.5	16.0	14.5	13.9	-	
56	15.9	15.0	13.5	13.1	-	
64	15.2	13.9	12.6	12.1	-	
72	14.1	12.6	11.7	11.3	9.5	
80	13.0	11.7	10.9	10.5	9.0	
88	11.6	10.8	10.2	9.7	8.5	
96	10.5	9.9	9.6	9.2	8.1	
104	9.0	9.1	9.1	8.7	7.7	
112	7.4	8.1	8.3	7.9	7.5	
120	6.2	6.7	7.0	7.0	7.1	
128	5.5	5.5	5.6	5.7	6.3	
136	4.7	5.0	2.3	5.0	5.0	
144	4.2	4.2	-	4.2	-	
152	3.7	-	-	-	-	

 * 191.9 ft

 39.4 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft		1,000 lb				
10	29.1	-	-	-	-	
12	29.1	-	-	-	-	
14	29.1	-	-	-	-	
16	29.1	-	-	-	-	
18	28.9	-	-	-	-	
20	28.4	-	-	-	-	
24	25.6	21.9	-	-	-	
28	23.2	20.0	-	-	-	
32	20.9	18.4	16.8	16.3	-	
36	19.2	17.1	15.7	15.2	-	
40	17.6	15.9	14.6	14.2	-	
48	15.2	13.9	13.1	12.7	11.0	
56	13.4	12.4	11.9	11.4	10.0	
64	11.8	11.2	10.8	10.4	9.4	
72	10.6	10.2	10.2	9.5	8.8	
80	9.5	9.4	-	9.0	-	

19,000 lb		26.6 ft x 23.6 ft		360°		85%	
 194.9 ft				 179.1 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°*	0°	0°	
ft		1,000 lb		ft		1,000 lb	
56	4.6	-	-	-	-	-	
64	4.6	-	-	-	-	-	
72	4.6	4.6	-	-	-	-	
80	3.7	4.5	5.1	-	-	-	
88	-	3.6	4.8	-	-	-	
96	-	2.2	3.6	-	-	-	
104	-	-	2.2	-	-	-	

 109.6 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb		ft		1,000 lb	
24	18.4	-	-	-	-	-	
28	18.1	-	-	-	-	-	
32	17.7	-	-	-	-	-	
36	17.4	-	-	-	-	-	
40	17.2	16.9	-	-	-	-	
48	16.5	16.0	14.5	13.9	-	-	
56	15.9	15.0	13.5	13.1	-	-	
64	14.7	13.9	12.6	12.1	-	-	
72	12.2	12.6	11.7	11.3	9.5	-	
80	10.4	10.9	10.8	10.4	9.0	-	
88	8.2	9.2	9.6	9.3	8.5	-	
96	7.0	7.3	8.1	7.8	8.0	-	
104	5.7	6.3	6.4	6.2	7.2	-	
112	4.3	5.0	5.4	5.5	5.7	-	
120	3.3	3.9	4.2	4.4	4.8	-	
128	2.5	3.0	3.2	3.3	3.7	-	
136	1.7	2.2	2.3	2.4	2.7	-	

 *191.9 ft

 39.4 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb		ft		1,000 lb	
10	29.1	-	-	-	-	-	
12	29.1	-	-	-	-	-	
14	29.1	-	-	-	-	-	
16	29.1	-	-	-	-	-	
18	28.9	-	-	-	-	-	
20	28.4	-	-	-	-	-	
24	25.6	21.9	-	-	-	-	
28	23.2	20.0	-	-	-	-	
32	20.9	18.4	16.8	16.3	-	-	
36	19.2	17.1	15.7	15.2	-	-	
40	17.6	15.9	14.6	14.2	-	-	
48	15.2	13.9	13.1	12.7	11.0	-	
56	13.4	12.4	11.9	11.4	10.0	-	
64	11.8	11.2	10.8	10.4	9.4	-	
72	10.6	10.2	10.2	9.5	8.8	-	
80	9.5	9.4	-	9.0	-	-	

13,400 lb		26.6 ft x 23.6 ft		360°		85 %	
 194.9 ft				 179.1 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°*	0°	0°	
ft		1,000 lb		ft		1,000 lb	
56	4.6	-	-	-	-	-	
64	4.6	-	-	-	-	-	
72	4.0	4.6	-	-	-	-	
80	-	3.9	4.9	-	-	-	
88	-	-	3.8	-	-	-	
96	-	-	2.2	-	-	-	
 109.6 ft				 39.4 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb		ft		1,000 lb	
24	18.4	-	-	-	-	-	
28	18.1	-	-	-	-	-	
32	17.7	-	-	-	-	-	
36	17.4	-	-	-	-	-	
40	17.2	16.9	-	-	-	-	
48	16.5	16.0	14.5	13.9	-	-	
56	15.5	15.0	13.5	13.1	-	-	
64	13.3	13.7	12.6	12.1	-	-	
72	11.3	12.1	11.7	11.3	9.5	-	
80	8.9	10.0	10.4	10.0	9.0	-	
88	7.5	8.0	8.6	8.5	8.4	-	
96	5.8	6.6	6.8	6.7	7.6	-	
104	4.5	5.2	5.7	5.6	6.2	-	
112	3.5	3.9	4.3	4.3	5.2	-	
120	2.5	2.9	3.3	3.3	3.9	-	
128	-	2.1	2.3	2.3	2.9	-	
136	-	-	-	-	1.8	-	
 * 191.9 ft							

9,500 lb		26.6 ft x 23.6 ft		360°		85%	
 194.9 ft				 179.1 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°*	0°	0°	
ft		1,000 lb		ft		1,000 lb	
56	4.6	-	-	-	-	-	-
64	4.3	-	-	-	-	-	-
72	2.5	4.4	-	-	-	-	-
80	-	-	4.3	-	-	-	-
88	-	-	2.5	-	-	-	-

 109.6 ft						
 		26.3 ft				
		0°	0°	0°	20°	40°
 		62.3 ft				
		0°	20°	40°	0°	0°
ft	1,000 lb					
24	18.4	-	-	-	-	
28	18.1	-	-	-	-	
32	17.7	-	-	-	-	
36	17.4	-	-	-	-	
40	17.2	16.9	-	-	-	
48	16.4	16.0	14.5	13.9	-	
56	14.6	14.8	13.5	13.1	-	
64	12.3	13.2	12.6	12.1	-	
72	9.9	11.1	11.5	11.0	9.5	
80	8.3	8.7	9.8	9.6	9.0	
88	6.5	7.3	7.5	7.5	8.1	
96	4.9	5.8	6.4	6.1	6.9	
104	3.7	4.4	4.8	4.8	5.5	
112	2.6	3.2	3.7	3.5	4.3	
120	-	2.2	2.6	2.5	3.1	
128	-	-	-	-	2.1	

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft	1,000 lb					
10	29.1	-	-	-	-	
12	29.1	-	-	-	-	
14	29.1	-	-	-	-	
16	29.1	-	-	-	-	
18	28.9	-	-	-	-	
20	28.4	-	-	-	-	
24	25.6	21.9	-	-	-	
28	23.2	20.0	-	-	-	
32	20.9	18.4	16.8	16.3	-	
36	19.2	17.1	15.7	15.2	-	
40	17.6	15.9	14.6	14.2	-	
48	15.2	13.9	13.1	12.7	11.0	
56	13.4	12.4	11.9	11.4	10.0	
64	11.8	11.2	10.8	10.4	9.4	
72	10.6	10.2	10.2	9.5	8.8	
80	9.4	9.3	-	9.0	-	

 *191.9 ft

54,000 lb		26.6 ft x 23.6 ft		360°		85 %	
 179.1 ft				 109.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°*	0°*	0°**	
ft		1,000 lb					
56		3.5	-	-	-	-	
64		3.5	-	-	-	-	
72		3.5	-	-	-	-	
80		3.5	3.5	-	-	-	
88		3.5	3.5	-	5.0	-	
96		3.5	3.5	-	4.9	-	
104		3.3	3.5	5.1	4.9	-	
112		3.3	3.3	4.9	4.6	4.6	
120		3.3	3.3	4.9	4.6	4.4	
128		3.3	3.3	4.9	4.6	4.3	
136		2.8	3.3	4.9	4.5	4.2	
144		2.0	3.1	4.6	4.0	4.2	
152		-	2.5	3.6	3.2	3.9	
160		-	-	2.7	2.2	3.3	

 39.4 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb					
14		17.2	-	-	-	-	
16		17.2	-	-	-	-	
18		17.1	-	-	-	-	
20		16.9	-	-	-	-	
24		16.3	-	-	-	-	
28		15.5	-	-	-	-	
32		14.7	-	-	-	-	
36		13.9	-	-	-	-	
40		13.1	11.8	-	-	-	
48		11.6	10.5	-	9.6	-	
56		10.2	9.2	8.7	8.6	-	
64		9.0	8.3	7.9	7.7	-	
72		8.0	7.5	7.1	7.1	-	
80		7.2	6.7	6.5	6.3	5.6	
88		6.6	6.2	6.0	5.8	5.2	
96		5.9	5.7	5.6	5.2	4.8	
104		5.4	5.3	-	4.9	4.6	
112		4.8	-	-	-	-	

 109.6 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb					
32		10.1	-	-	-	-	
36		10.0	-	-	-	-	
40		9.9	-	-	-	-	
48		9.6	-	-	-	-	
56		9.4	-	-	-	-	
64		9.1	8.9	-	-	-	
72		8.8	8.4	-	7.5	-	
80		8.6	7.9	7.0	7.2	-	
88		8.3	7.4	6.7	6.7	5.4	
96		7.9	7.0	6.5	6.3	5.2	
104		7.3	6.6	6.2	6.0	4.9	
112		6.8	6.2	5.7	5.7	4.8	
120		6.3	5.8	5.4	5.2	4.6	
128		5.9	5.4	5.2	5.0	4.4	
136		5.4	5.1	4.9	4.7	4.2	
144		4.9	4.9	4.6	4.4	4.2	
152		4.3	4.5	4.5	4.2	4.2	
160		3.5	4.0	4.2	4.1	4.0	
168		2.8	3.3	-	3.6	-	
176		2.5	2.5	-	2.8	-	

 * 165.4 ft ** 151.6 ft

42,500 lb		26.6 ft x 23.6 ft		360°		85%	
 179.1 ft				 109.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°*	0°*	0°**	
ft		1,000 lb		ft		1,000 lb	
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	3.5	-	-	-	-	-	
80	3.5	3.5	-	-	-	-	
88	3.5	3.5	-	5.0	-	-	
96	3.5	3.5	-	4.9	-	-	
104	3.3	3.5	5.1	4.9	-	-	
112	3.3	3.3	4.9	4.6	4.6		
120	2.8	3.3	4.9	4.6	4.4		
128	-	3.2	4.7	4.2	4.3		
136	-	2.4	4.0	3.1	4.2		
144	-	1.6	2.9	2.2	4.0		
152	-	-	-	-	2.9		

 39.4 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb		ft		1,000 lb	
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6		
88	6.6	6.2	6.0	5.8	5.2		
96	5.9	5.7	5.6	5.2	4.8		
104	5.4	5.3	-	4.9	4.6		
112	4.8	-	-	-	-		

		0°	0°	0°	20°	40°	
		0°	20°	40°	0°	0°	
32	10.1	-	-	-	-	-	
36	10.0	-	-	-	-	-	
40	9.9	-	-	-	-	-	
48	9.6	-	-	-	-	-	
56	9.4	-	-	-	-	-	
64	9.1	8.9	-	-	-	-	
72	8.8	8.4	-	7.5	-	-	
80	8.6	7.9	7.0	7.2	-	-	
88	8.3	7.4	6.7	6.7	5.4		
96	7.9	7.0	6.5	6.3	5.2		
104	7.3	6.6	6.2	6.0	4.9		
112	6.8	6.2	5.7	5.7	4.8		
120	6.2	5.8	5.4	5.2	4.6		
128	5.3	5.4	5.2	5.0	4.4		
136	4.4	5.1	4.9	4.7	4.2		
144	3.8	4.4	4.6	4.4	4.2		
152	3.4	3.7	3.9	3.6	3.9		
160	2.7	3.1	3.2	3.1	3.4		
168	-	2.5	-	2.6	-		
176	-	1.9	-	2.1	-		

 * 165.4 ft ** 151.6 ft

19,000 lb		26.6 ft x 23.6 ft		360°		85 %	
179.1 ft		26.3 ft		109.6 ft		26.3 ft	
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°*	0°*	0°**	
ft	1,000 lb						
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	3.5	-	-	-	-	-	
80	3.4	3.5	-	-	-	-	
88	2.4	3.5	-	5.0	-	-	
96	-	3.2	-	4.4	-	-	
104	-	2.2	4.5	3.3	-	-	
112	-	-	3.0	-	4.6	-	
120	-	-	-	-	3.5	-	
128	-	-	-	-	2.4	-	

39.4 ft		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft	1,000 lb						
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6	-	
88	6.6	6.2	6.0	5.8	5.2	-	
96	5.9	5.7	5.6	5.2	4.8	-	
104	5.4	5.3	-	4.9	4.6	-	
112	4.8	-	-	-	-	-	

* 165.4 ft ** 151.6 ft		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft	1,000 lb						
32	10.1	-	-	-	-	-	
36	10.0	-	-	-	-	-	
40	9.9	-	-	-	-	-	
48	9.6	-	-	-	-	-	
56	9.4	-	-	-	-	-	
64	9.1	8.9	-	-	-	-	
72	8.8	8.4	-	7.5	-	-	
80	8.5	7.9	7.0	7.2	-	-	
88	7.6	7.4	6.7	6.7	5.4	-	
96	6.6	6.9	6.5	6.3	5.2	-	
104	5.4	6.4	6.2	6.0	4.9	-	
112	4.6	5.5	5.7	5.5	4.8	-	
120	3.7	4.4	5.3	4.6	4.6	-	
128	2.8	3.5	4.2	3.6	4.2	-	
136	1.9	2.8	3.1	2.7	3.3	-	
144	-	2.0	2.2	1.8	2.3	-	


 13,400 lb		 26.6 ft x 23.6 ft		360°		85 %	
 179.1 ft						 109.6 ft	
				26.3 ft			
		0°	0°	0°	20°	40°	
				32.8 ft			
		0°	20°	40°*	0°*	0°**	
ft				1,000 lb			
56	3.5	-	-	-	-		
64	3.5	-	-	-	-		
72	3.5	-	-	-	-		
80	-	3.5	-	-	-		
88	-	3.3	-	4.7	-		
96	-	2.2	-	3.4	-		
104	-	-	3.3	1.9	-		
112	-	-	-	-	3.7		
120	-	-	-	-	2.4		

 39.4 ft				26.3 ft			
		0°	0°	0°	20°	40°	
				32.8 ft			
		0°	20°	40°	0°	0°	
ft				1,000 lb			
14	17.2	-	-	-	-		
16	17.2	-	-	-	-		
18	17.1	-	-	-	-		
20	16.9	-	-	-	-		
24	16.3	-	-	-	-		
28	15.5	-	-	-	-		
32	14.7	-	-	-	-		
36	13.9	-	-	-	-		
40	13.1	11.8	-	-	-		
48	11.6	10.5	-	9.6	-		
56	10.2	9.2	8.7	8.6	-		
64	9.0	8.3	7.9	7.7	-		
72	8.0	7.5	7.1	7.1	-		
80	7.2	6.7	6.5	6.3	5.6		
88	6.6	6.2	6.0	5.8	5.2		
96	5.9	5.7	5.6	5.2	4.8		
104	5.4	5.3	-	4.9	4.6		
112	4.8	-	-	-	-		

 * 165.4 ft ** 151.6 ft

9,500 lb		26.6 ft x 23.6 ft		360°		85%	
 179.1 ft				 109.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°*	0°*	0°**	
ft		1,000 lb		ft		1,000 lb	
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	2.7	-	-	-	-	-	
80	-	3.4	-	-	-	-	
88	-	2.4	-	3.9	-	-	
96	-	-	-	2.4	-	-	
104	-	-	2.2	-	-	-	
112	-	-	-	-	-	2.8	
 39.4 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lb		ft		1,000 lb	
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6	-	
88	6.6	6.2	6.0	5.8	5.2	-	
96	5.9	5.7	5.6	5.2	4.8	-	
104	5.4	5.3	-	4.9	4.6	-	
112	4.8	-	-	-	-	-	

 * 165.4 ft ** 151.6 ft

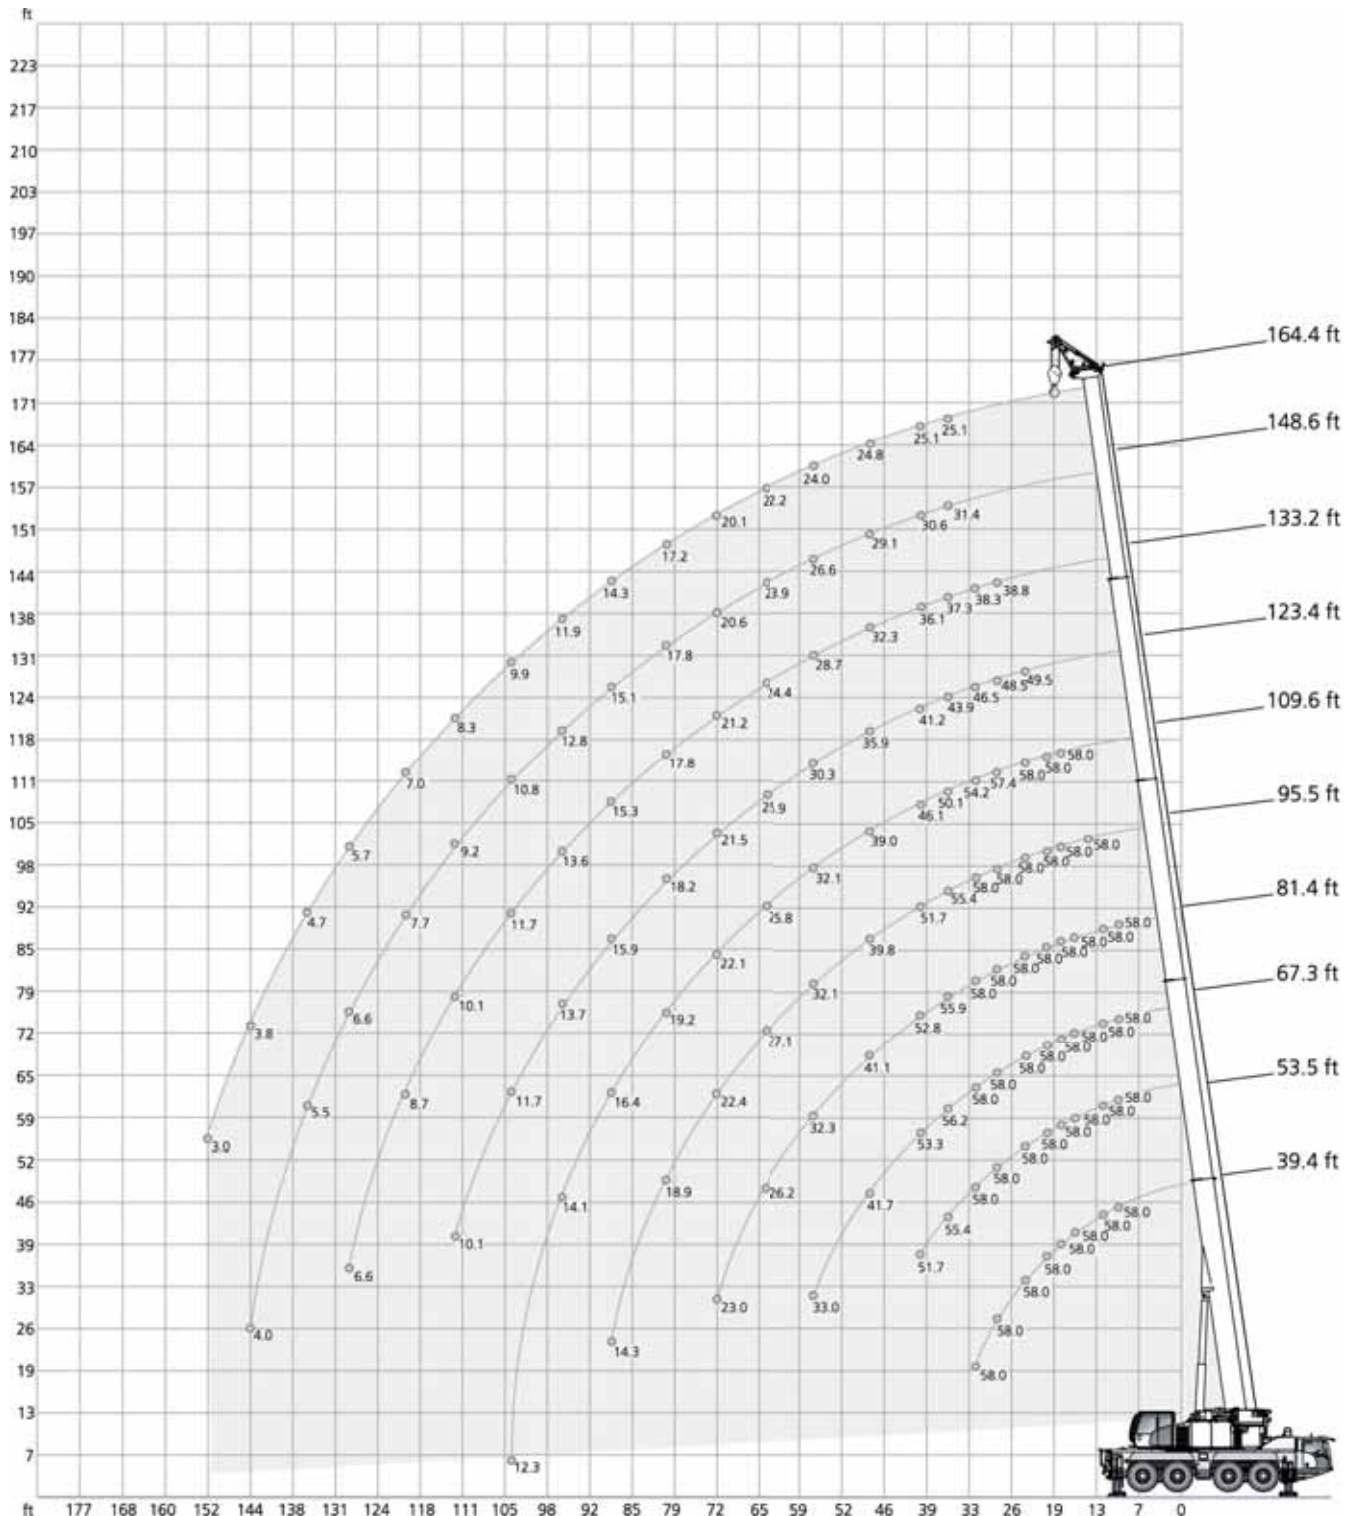


 54,000 lb		 26.6 ft x 23.6 ft				360°				85 %		
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lb											ft
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	58.0	58.0	58.0	49.5	-	-	-	24
28	58.0	58.0	58.0	58.0	58.0	58.0	57.4	48.5	38.8	-	-	28
32	58.0	58.0	58.0	58.0	58.0	58.0	54.2	46.5	38.3	-	-	32
36	-	55.4	56.2	55.9	55.4	50.1	43.9	37.3	31.4	25.1	36	36
40	-	51.7	53.3	52.8	51.7	46.1	41.2	36.1	30.6	25.1	40	40
48	-	-	41.7	41.1	39.8	39.0	35.9	32.3	29.1	24.8	48	48
56	-	-	33.0	32.3	32.1	32.1	30.3	28.7	26.6	24.0	56	56
64	-	-	16.5	26.2	27.1	25.8	25.9	24.4	23.9	22.2	64	64
72	-	-	-	23.0	22.4	22.1	21.5	21.2	20.6	20.1	72	72
80	-	-	-	-	18.9	19.2	18.2	17.8	17.8	17.2	80	80
88	-	-	-	-	14.3	16.4	15.9	15.3	15.1	14.3	88	88
96	-	-	-	-	-	14.1	13.7	13.6	12.8	11.9	96	96
104	-	-	-	-	-	12.3	11.7	11.7	10.8	9.9	104	104
112	-	-	-	-	-	-	10.1	10.1	9.2	8.3	112	112
120	-	-	-	-	-	-	-	8.7	7.7	7.0	120	120
128	-	-	-	-	-	-	-	6.6	6.6	5.7	128	128
136	-	-	-	-	-	-	-	-	5.5	4.7	136	136
144	-	-	-	-	-	-	-	-	4.0	3.8	144	144
152	-	-	-	-	-	-	-	-	-	3.0	152	152

 42,500 lb		 26.6 ft x 23.6 ft				360°					85 %	
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft						1,000 lb						ft
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	58.0	58.0	58.0	49.5	-	-	-	24
28	58.0	58.0	58.0	58.0	58.0	58.0	57.4	48.5	38.8	-	-	28
32	58.0	58.0	58.0	58.0	58.0	58.0	54.2	46.5	38.3	-	-	32
36	-	52.9	53.7	53.5	52.7	49.9	43.9	37.3	31.4	25.1	36	36
40	-	47.7	48.1	47.7	46.2	45.3	41.1	36.1	30.6	25.1	40	40
48	-	-	36.3	35.8	35.7	35.4	33.8	32.0	29.1	24.8	48	48
56	-	-	28.5	28.5	28.9	27.8	27.9	26.8	26.0	24.0	56	56
64	-	-	16.5	23.9	23.3	23.5	22.7	22.1	21.9	21.2	64	64
72	-	-	-	19.7	19.7	19.3	18.8	19.0	18.2	17.3	72	72
80	-	-	-	-	16.8	16.3	15.9	15.9	15.0	14.1	80	80
88	-	-	-	-	13.1	13.8	13.3	13.4	12.4	11.6	88	88
96	-	-	-	-	-	11.8	11.2	11.2	10.3	9.5	96	96
104	-	-	-	-	-	10.1	9.5	9.5	8.6	7.7	104	104
112	-	-	-	-	-	-	8.1	8.1	7.0	6.3	112	112
120	-	-	-	-	-	-	-	6.8	5.9	5.0	120	120
128	-	-	-	-	-	-	-	4.7	4.7	4.0	128	128
136	-	-	-	-	-	-	-	-	3.9	3.0	136	136
144	-	-	-	-	-	-	-	-	2.2	2.2	144	144

 19,000 lb		 26.6 ft x 23.6 ft				360°				85 %		
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft						1,000 lb						ft
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24		58.0	58.0	58.0	58.0	58.0	57.6	49.5	-	-	-	24
28		56.0	57.5	57.9	57.0	55.4	52.8	47.5	38.8	-	-	28
32		47.1	50.0	50.4	49.6	48.5	45.7	42.7	38.3	-	-	32
36		-	41.5	41.9	41.3	42.0	39.6	38.0	34.3	31.1	25.1	36
40		-	34.3	34.8	35.8	35.2	35.4	33.9	31.5	29.4	24.9	40
48		-	-	26.5	26.7	26.9	26.3	25.8	25.7	23.7	21.8	48
56		-	-	20.6	20.7	20.7	20.4	19.8	19.8	18.6	17.1	56
64		-	-	16.1	16.6	16.6	16.2	15.5	15.5	14.6	13.1	64
72		-	-	-	13.3	13.3	12.9	12.2	12.2	11.3	10.0	72
80		-	-	-	-	10.9	10.2	9.6	9.8	8.7	7.6	80
88		-	-	-	-	8.8	8.3	7.6	7.7	6.7	5.8	88
96		-	-	-	-	-	6.7	6.0	6.0	5.1	4.2	96
104		-	-	-	-	-	5.2	4.6	4.8	3.7	3.0	104
112		-	-	-	-	-	-	3.5	3.7	2.6	-	112
120		-	-	-	-	-	-	-	2.7	-	-	120

 13,400 lb		 26.6 ft x 23.6 ft				360°					85 %	
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft						1,000 lb						ft
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	58.0	57.6	56.1	49.4	-	-	-	24
28	53.4	54.9	55.3	54.4	52.7	49.6	45.1	38.8	31.0	-	-	28
32	42.9	45.8	46.3	45.7	45.4	42.6	40.5	36.2	30.7	-	-	32
36	-	37.9	38.4	38.8	38.5	37.5	35.7	33.4	29.5	25.1	-	36
40	-	31.0	32.6	32.8	32.8	32.1	30.7	30.1	27.4	24.7	-	40
48	-	-	24.1	24.2	24.3	23.9	23.3	23.0	20.9	19.0	-	48
56	-	-	18.5	18.8	18.8	18.3	17.7	17.7	16.1	14.5	-	56
64	-	-	14.6	14.6	14.8	14.2	13.5	13.7	12.4	10.8	-	64
72	-	-	-	11.7	11.7	11.1	10.4	10.4	9.5	8.0	-	72
80	-	-	-	-	9.4	8.7	8.1	8.3	7.2	6.1	-	80
88	-	-	-	-	7.4	7.0	6.3	6.3	5.4	4.3	-	88
96	-	-	-	-	-	5.3	4.8	4.8	3.8	3.0	-	96
104	-	-	-	-	-	4.1	3.5	3.5	2.6	1.7	-	104
112	-	-	-	-	-	-	2.4	2.6	-	-	-	112

 9,500 lb		 26.6 ft x 23.6 ft		360°								85 %	
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4		
ft						1,000 lb						ft	
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10	
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12	
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14	
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16	
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18	
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20	
24	57.8	58.0	58.0	57.5	56.7	54.9	48.2	38.0	-	-	-	24	
28	51.2	53.0	53.4	52.0	50.2	46.9	43.4	38.0	31.0	-	-	28	
32	39.7	42.6	43.1	43.5	42.3	40.6	38.3	36.2	30.7	-	-	32	
36	-	35.2	35.6	36.9	35.7	35.1	33.0	32.1	28.2	24.3	-	36	
40	-	28.9	30.2	30.4	30.4	30.0	28.1	27.4	25.0	22.9	-	40	
48	-	-	22.2	22.6	22.7	22.0	21.2	20.9	18.7	16.9	-	48	
56	-	-	17.0	17.1	17.2	16.5	16.0	16.0	14.2	12.7	-	56	
64	-	-	13.2	13.3	13.3	12.6	12.2	12.2	10.8	9.3	-	64	
72	-	-	-	10.4	10.4	9.8	9.1	9.1	8.0	6.7	-	72	
80	-	-	-	-	8.1	7.6	7.0	7.0	5.9	4.6	-	80	
88	-	-	-	-	6.4	5.8	5.2	5.2	4.3	3.1	-	88	
96	-	-	-	-	-	4.4	3.7	3.9	2.8	1.9	-	96	
104	-	-	-	-	-	3.2	2.6	2.6	1.7	-	-	104	

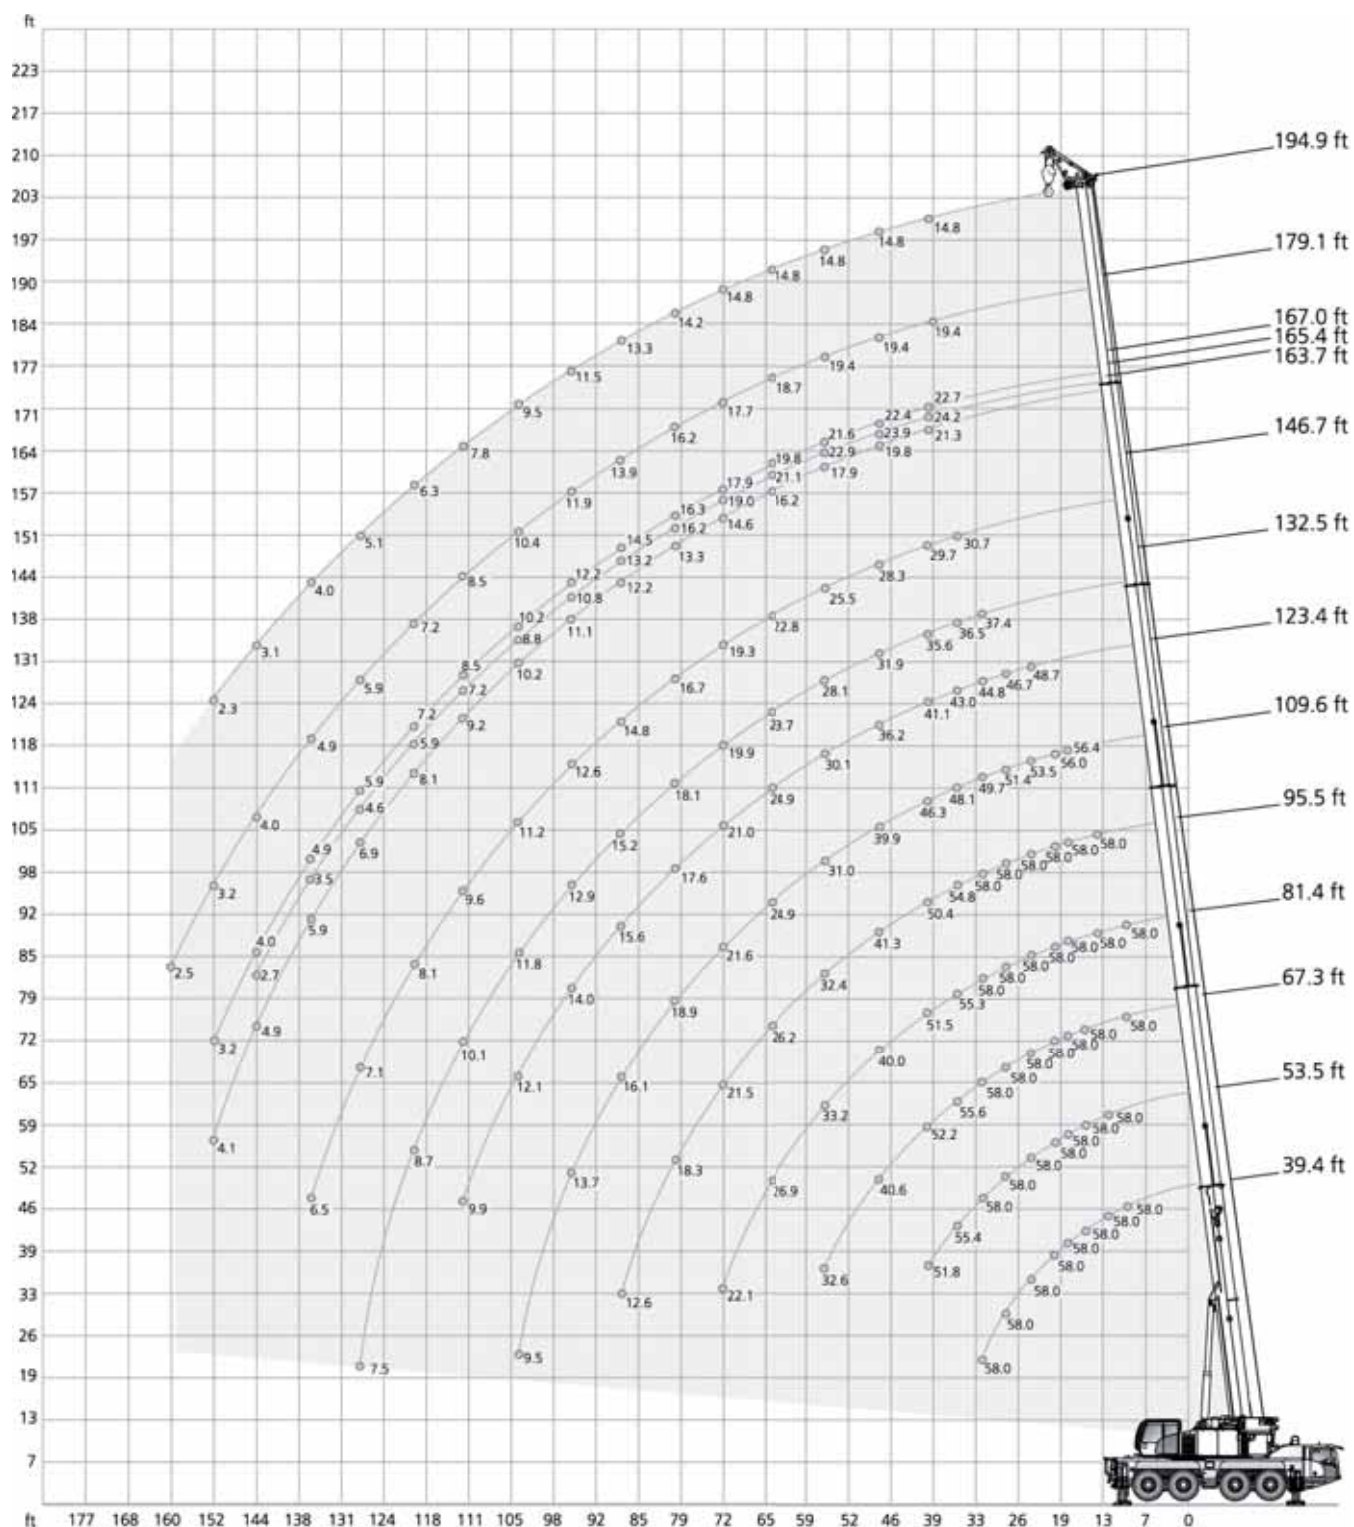

 54,000 lb		 26.6 ft x 23.6 ft		360°		85 %												
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	
ft									1,000 lb									ft
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20
24		58.0	58.0	58.0	58.0	58.0	53.5	48.7	-	-	-	-	-	-	-	-	-	24
28		58.0	58.0	58.0	58.0	58.0	51.4	46.7	-	-	-	-	-	-	-	-	-	28
32		58.0	58.0	58.0	58.0	58.0	49.7	44.8	37.4	-	-	-	-	-	-	-	-	32
36		-	55.4	55.6	55.3	54.8	48.1	43.0	36.5	30.7	21.5	24.3	22.7	-	-	-	-	36
40		-	51.8	52.2	51.5	50.4	46.3	41.1	35.6	29.7	21.3	24.2	22.7	19.4	14.8	-	-	40
48		-	-	40.6	40.0	41.3	39.9	36.2	31.9	28.3	19.8	23.9	22.4	19.4	14.8	-	-	48
56		-	-	32.6	33.2	32.4	31.0	30.1	28.1	25.5	17.9	22.9	21.6	19.4	14.8	-	-	56
64		-	-	-	26.9	26.2	24.9	24.9	23.7	22.8	16.2	21.1	19.8	18.7	14.8	-	-	64
72		-	-	-	22.1	21.5	21.6	21.0	19.9	19.3	14.6	19.0	17.9	17.7	14.8	-	-	72
80		-	-	-	-	18.3	18.9	17.6	18.1	16.7	13.3	16.2	16.3	16.2	14.2	-	-	80
88		-	-	-	-	12.6	16.1	15.6	15.2	14.8	12.2	13.2	14.5	13.9	13.3	-	-	88
96		-	-	-	-	-	13.7	14.0	12.9	12.6	11.1	10.8	12.2	11.9	11.5	-	-	96
104		-	-	-	-	-	9.5	12.1	11.8	11.2	10.2	8.8	10.2	10.4	9.5	-	-	104
112		-	-	-	-	-	-	9.9	10.1	9.6	9.2	7.2	8.5	8.5	7.8	-	-	112
120		-	-	-	-	-	-	-	8.7	8.1	8.1	5.9	7.2	7.2	6.3	-	-	120
128		-	-	-	-	-	-	-	7.5	7.1	6.9	4.6	5.9	5.9	5.1	-	-	128
136		-	-	-	-	-	-	-	-	6.5	5.9	3.5	4.9	4.9	4.0	-	-	136
144		-	-	-	-	-	-	-	-	4.9	4.9	2.7	4.0	4.0	3.1	-	-	144
152		-	-	-	-	-	-	-	-	-	4.1	-	3.2	3.2	2.3	-	-	152
160		-	-	-	-	-	-	-	-	-	-	-	-	-	2.5	-	-	160

 42,500 lb		 26.6 ft x 23.6 ft		360°		85 %												
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	
ft								1,000 lb										ft
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20
24		58.0	58.0	58.0	58.0	58.0	53.5	48.7	-	-	-	-	-	-	-	-	-	24
28		58.0	58.0	58.0	58.0	58.0	51.4	46.7	-	-	-	-	-	-	-	-	-	28
32		58.0	58.0	58.0	58.0	58.0	49.7	44.8	37.4	-	-	-	-	-	-	-	-	32
36		-	53.2	53.3	52.9	52.2	48.1	43.0	36.5	30.7	21.5	24.3	22.7	-	-	-	-	36
40		-	47.0	47.3	46.6	47.1	45.8	40.9	35.6	29.7	21.3	24.2	22.7	19.4	14.8	-	-	40
48		-	-	35.9	36.9	36.1	34.5	33.8	31.5	28.3	19.8	23.9	22.4	19.4	14.8	-	-	48
56		-	-	29.0	28.8	28.1	27.1	26.6	25.9	24.9	17.9	22.9	21.6	19.4	14.8	-	-	56
64		-	-	-	23.2	22.4	22.9	22.0	21.8	20.8	16.2	20.3	19.8	18.7	14.8	-	-	64
72		-	-	-	19.0	19.7	19.0	18.6	18.2	18.1	14.6	16.4	17.7	17.0	14.8	-	-	72
80		-	-	-	-	16.8	15.9	16.3	15.4	15.1	13.3	13.2	14.6	14.0	13.3	-	-	80
88		-	-	-	-	9.9	14.1	13.7	13.5	13.1	12.2	10.5	12.0	12.0	10.9	-	-	88
96		-	-	-	-	-	12.3	11.7	11.4	10.8	10.7	8.4	9.8	9.8	8.9	-	-	96
104		-	-	-	-	-	8.0	10.3	9.7	9.1	9.0	6.6	7.9	7.9	7.3	-	-	104
112		-	-	-	-	-	-	8.8	8.1	8.1	7.4	5.0	6.5	6.5	5.7	-	-	112
120		-	-	-	-	-	-	-	6.8	7.0	6.1	3.9	5.3	5.3	4.4	-	-	120
128		-	-	-	-	-	-	-	5.7	5.8	5.1	2.8	4.2	4.2	3.3	-	-	128
136		-	-	-	-	-	-	-	-	4.9	4.1	1.8	3.1	3.3	2.4	-	-	136
144		-	-	-	-	-	-	-	-	3.3	3.3	-	2.2	2.5	-	-	-	144
152		-	-	-	-	-	-	-	-	-	2.6	-	-	-	-	-	-	152

 19,000 lb		 26.6 ft x 23.6 ft		360°		85%												
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	
ft								1,000 lb										ft
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20
24		58.0	58.0	58.0	58.0	58.0	53.5	48.7	-	-	-	-	-	-	-	-	-	24
28		56.0	57.3	57.5	56.5	55.4	50.8	46.7	-	-	-	-	-	-	-	-	-	28
32		47.1	49.5	49.8	49.9	48.9	45.2	41.7	37.4	-	-	-	-	-	-	-	-	32
36		-	41.0	41.2	42.8	41.4	39.5	36.5	33.3	30.0	21.5	24.3	22.7	-	-	-	-	36
40		-	34.5	35.6	35.4	34.5	34.5	32.7	30.4	27.8	21.3	24.0	22.7	19.4	14.8	-	-	40
48		-	-	26.3	26.2	26.6	26.4	25.8	24.7	23.5	19.8	20.7	21.5	19.0	14.8	-	-	48
56		-	-	20.2	20.8	20.9	20.5	20.5	20.5	19.5	17.9	16.0	17.5	16.8	14.3	-	-	56
64		-	-	-	16.9	16.8	16.9	16.7	16.0	15.5	15.0	12.2	13.7	13.3	11.6	-	-	64
72		-	-	-	13.7	14.0	13.7	13.3	12.8	12.9	11.8	9.1	10.4	10.2	8.7	-	-	72
80		-	-	-	-	11.3	11.1	10.7	10.9	10.2	9.4	6.7	8.1	7.8	6.3	-	-	80
88		-	-	-	-	8.3	9.1	8.6	8.8	8.1	7.3	4.7	6.2	5.8	4.5	-	-	88
96		-	-	-	-	-	7.5	6.9	7.1	6.4	5.7	3.1	4.6	4.4	3.1	-	-	96
104		-	-	-	-	-	6.1	5.5	5.7	5.0	4.4	1.9	3.3	3.2	1.9	-	-	104
112		-	-	-	-	-	-	4.4	4.6	3.7	3.0	-	-	-	-	-	-	112
120		-	-	-	-	-	-	-	3.6	2.8	2.2	-	-	-	-	-	-	120
128		-	-	-	-	-	-	-	2.0	2.0	-	-	-	-	-	-	-	128

 13,400 lb		 26.6 ft x 23.6 ft		360°		85%										
		(ft)														
ft		39.4	53.5	67.3	81.4	95.5	109.6	123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	ft
1,000 lb																
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	20
24		58.0	58.0	58.0	58.0	57.6	53.5	48.7	-	-	-	-	-	-	-	24
28		53.5	54.8	54.9	54.0	53.0	48.9	44.8	36.0	-	-	-	-	-	-	28
32		43.0	45.2	45.8	46.9	44.8	42.1	39.6	35.6	-	-	-	-	-	-	32
36		-	37.3	39.4	39.3	37.8	36.7	34.5	31.7	28.4	21.5	24.3	22.7	-	-	36
40		-	31.4	32.5	32.3	32.1	31.4	30.7	29.0	26.1	21.3	23.8	22.6	19.4	14.8	40
48		-	-	23.9	24.3	24.8	24.1	24.3	23.7	22.0	19.7	18.1	19.8	18.2	14.8	48
56		-	-	18.3	19.3	19.0	19.3	19.0	18.4	17.3	16.6	13.4	15.2	14.8	13.0	56
64		-	-	-	15.3	15.3	15.1	14.9	14.3	14.2	12.8	9.9	11.5	11.1	9.5	64
72		-	-	-	12.2	12.2	12.0	11.7	11.7	11.1	9.8	7.1	8.7	8.2	6.7	72
80		-	-	-	-	9.8	9.6	9.2	9.4	8.7	7.6	5.0	6.4	6.1	4.6	80
88		-	-	-	-	8.1	7.7	7.3	7.4	6.7	5.8	3.2	4.7	4.4	3.0	88
96		-	-	-	-	-	6.1	5.7	5.8	5.1	4.4	-	3.3	3.1	-	96
104		-	-	-	-	-	4.8	4.4	4.5	3.9	3.0	-	2.1	1.9	-	104
112		-	-	-	-	-	-	3.3	3.5	2.8	-	-	-	-	-	112
120		-	-	-	-	-	-	-	2.5	-	-	-	-	-	-	120

 9,500 lb		 26.6 ft x 23.6 ft		360°												85%	
		(ft)															
ft		39.4	53.5	67.3	81.4	95.5	109.6	123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	ft	
1,000 lb																	
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	10	
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	12	
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	14	
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	16	
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	18	
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	20	
24		57.9	58.0	58.0	57.2	56.9	52.6	48.1	-	-	-	-	-	-	-	24	
28		51.5	52.9	53.0	52.4	50.2	46.9	42.8	36.0	-	-	-	-	-	-	28	
32		39.8	42.2	43.7	44.0	41.7	39.8	37.3	34.1	27.8	-	-	-	-	-	32	
36		-	35.2	36.8	36.5	35.3	34.1	32.4	30.5	26.6	21.5	23.4	22.7	-	-	36	
40		-	29.1	30.2	29.9	30.6	30.2	28.8	27.5	24.9	21.3	22.0	22.3	19.2	14.8	40	
48		-	-	22.0	23.1	22.9	22.9	22.9	21.3	19.8	19.1	15.9	17.7	17.1	14.1	48	
56		-	-	17.2	17.6	17.9	17.6	17.4	16.5	16.3	14.8	11.6	13.3	12.8	11.0	56	
64		-	-	-	13.8	13.9	13.7	13.3	13.4	12.6	11.2	8.3	9.9	9.4	7.7	64	
72		-	-	-	10.9	10.9	10.9	10.2	10.4	9.8	8.4	5.6	7.1	6.7	5.1	72	
80		-	-	-	-	8.7	8.5	8.1	8.1	7.4	6.4	3.7	5.0	4.8	3.3	80	
88		-	-	-	-	7.0	6.7	6.3	6.3	5.6	4.7	-	3.5	3.3	-	88	
96		-	-	-	-	-	5.3	4.8	4.8	4.2	3.4	-	2.2	2.0	-	96	
104		-	-	-	-	-	3.9	3.5	3.7	3.0	2.3	-	-	-	-	104	
112		-	-	-	-	-	-	2.6	2.6	-	-	-	-	-	-	112	

Basic machine

Equipment carrier

Engine 340-4	MTU; Output 340 kW (462 HP) at 1700 1/min, torque 2200 Nm at 1300 1/min; The engine complies with Euromot 4/Tier 4F; Exhaust system complete stainless steel with SCR catalyser.
Fuel tank	Fuel tank 108 gallons (no RME / biodiesel); 11 gallons AdBlue tank.
Transmission AS12	ZF AS-Tronic; Automated gearbox, 12 forward speeds and 2 reverse; 2-stage transfer case with switchable longitudinal lock and switchable off-road gear.
Axles 8 x 4 x 8	8 x 4 x 8; Four axles, axles 1 and 4 are driven and equipped with selectable transverse lock; All axles steered.
Suspension	Hydropneumatic suspension with axle load compensation; Hydraulically lockable; Manual or automatic levelling alternatively.
Steering	Dual circuit hydro servocom steering with emergency steering pump; Active rear axle steering (axles 3 and 4) with 6 different steering programs.
Brakes	Pneumatic dual circuit service brake with antilock system, acting on all wheels; Disc brakes; Additional exhaust brake and constant throttle valve; Spring-loaded parking brake; Incl. ABS.
Tires size 385/95 R25 (14.00R25)	Tires size 385/95 R25 (14.00R25); Steel rims 9,50-25/1,7".
Cab 2550	Type 8.4 ft; Adjustable driver seat, armrests and pneumatic suspension; Steering wheel height and tilt adjustable; Power door windows; Tinted glass; Radio preparation.
Heating engine-dependent	Engine-dependent warm water heating with 12 kW heating power.
Drive lights	Including low beams, high beams, daytime running lights.
Outriggers	H-4-Point design; Vertical and horizontal movement fully hydraulic; Manual or automatic levelling alternatively on both sides of carrier; 4 outrigger bases.
Outrigger pads 028	4 outrigger pads A = 0.92 ft ² with transport position at vertical cylinder.
Outrigger basis monitoring	Individual monitoring of horizontal stroke; Deviation warning in cab.
Outrigger load indicator	The outrigger load is indicated in the operator cab and the outrigger control box.
Electronic immobilizer system	Prevents uncontrolled carrier mobilization; Incl. 5 ignition keys.
Pneumatic tire filling plug	Pneumatic system adapter for inflating tires makes it possible for operators to inflate tires by themselves.
Contour safety marking	Continuous, yellow reflecting bands at carrier sides and tail.

Equipment superstructure

Engine 129-4	MTU; Output 129 kW (175 HP) at 2200 1/min, torque 750 Nm at 1200 1/min; The engine complies with Euromot 4/Tier 4F; Exhaust system complete stainless steel with SCR catalyser.
Fuel tank	Fuel tank 53 gallons Diesel (no RME/ Biodiesel); 6.6 gallons AdBlue tank.
Telescopic boom HA60	39.4 - 194.9 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 4 sheaves integrated in boom head for max. capacity of 114,900 lb.
Boom luffing	Single luffing cylinder with automatic lowering brake valve.
Rotary drive	Single slewing gear unit with spring-loaded multi-disc brake.
H1	Hoist with spring-loaded multi-disc brake; Resolver (hoist rotation indicator).
Counterweight 42,500 lb	42,500 lb, 5 pieces (SPECIAL 4 pieces); Automatic rigging system.
Control system	Enabling 4 simultaneous working movements; Electric pilot controls via 2 two-axis joysticks.
Operator aids	IC-1, with integrated load moment indicator acc. EN13000; Colour display; Displaying of current operating conditions, load charts, fault indicator; Signal lights indicating LMI-load; Crane data logger.
Hook height indication	Displaying and programmability of the hook height H1 and /or H2 by IC-1.
Cab 875	Type 2.9 ft; Tilt variable 16°; Fold-out front window; Extendable side, front pedestal; Handrails; Tinted safety glass; Pull-down sun visor; Radio preparation.
Heating engine-dependent	Engine-dependent warm water heating with 5 kW heating power.
Anemometer	Removable, to be used with all extensions.

Additional equipment

Carrier

Engine 335-3	MTU; Output 335 kW (455 HP) at 1800 1/min, torque 2000 Nm at 1300 1/min; The engine complies with Euromot 3a / Tier 3; Exhaust system complete stainless steel with spark arrester. Fuel tank 108 gallons Diesel (no RME / biodiesel).
Axles 8 x 6 x 8	8 x 6 x 8; Four axles, axles 1, 3 and 4 are driven and equipped with selectable transverse lock; All axles steered.
Eddy-current brake	Eddy current brake to increase the braking power, especially when towing a trailer.
Aircondition	Aircondition for carrier cab with 7 kW rated cooling power.

Superstructure

Engine 129-3	MTU; Output 129 kW (175 HP) at 2200 1/min, torque 675 Nm at 1200 1/min; The engine complies with Euromot 3a / Tier 3; Exhaust system complete stainless steel with spark arrester. Fuel tank 58 gallons Diesel (no RME / biodiesel).
Telescopic boom HA50	39.4 - 164.4 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 4 sheaves integrated in boom head for max. capacity of 114,900 lb.
Additional sheave on main boom head	1 additional sheave; For total 5 sheaves at boom head; Max. capacity 142,200 lb.
Heavy lift attachment	2 additional sheaves; Dis-/connectable; For total 7 sheaves at boom head; Max. capacity 176,400 lb.
2. hoist (H2)	2. hoist; Spring-loaded multi-disc brake; Resolver (hoist rotation indicator); Incl. quick couplings and transport rack; Self-rigging.
Additional counterweight 11,500 lb	Additional counterweight 11,500 lb; 2 pieces; For total 54,000 lb, 7 pieces (SPECIAL 6 pieces).
Aircondition	Aircondition in crane cab with 7 kW rated cooling power.

Handling

Remote control	Full control of rigging and crane movements via wireless remote control.
Working range limiter IC-1 Plus	Displaying and programmability of the work range limits by IC-1. Smart crane control system for main boom operation enabling higher lifting capacities especially over outriggers. Enables safe use of the full capacity of the crane even in asymmetric outrigger configurations. Outriggers can be positioned independently. Capacity precalculation for +/- 30° slewing angle and radius area. In-cab lift simulation.

Extensions

HAV10	32.8 ft; Swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage.
HAV19	62.3 ft; Double folding swing-away jib, manual offset 20°/40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft.
HAV-VA18	59.0 ft; Variable extension with swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft.
HAV-VA27	88.6 ft; Variable extension with double folding swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft, HAV 62.3 ft and HAV-VA 59.0 ft.
HAV-HY	Hydraulic, stepless offset 0°-40°, instead of the manual offset; Available for HAV 32.8 ft, HAV 62.3 ft, HAV-VA 59.0 ft and HAV-VA 88.6 ft.
MS (runner)	4.9 ft; Fixed assembly jib, 2-sheaves for max. capacity 58,700 lb; Incl. transport storage at boom head.

Hook Blocks

Hook block 100-7-18-D	100-7-18-D (1,650 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 80-5-18-D	80-5-18-D (1,430 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 50-3B-18-D-Vario	50-3B-18-D (1,210 lb); Hook block with adjustable ballast and ramshorn hook, variable usage as 1- and 3-sheave hook block; white with red signal stripes.
Hook block 50-3-18-D	50-3-18-D (1,210 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 20-1-18-E	20-1-18-E (662 lb); Hook block with single hook; white with red signal stripes.
Hook 8-0V-E-170	8-0V-E (375 lb); Single hook with vertical swivel; red.

Further additional equipment on request!

Weight data may deviate from posted values based on road / travel configuration, equipment configuration, and component weight tolerances.

Ratings are in compliance with ASME B30.5.
Lifting capacities do not exceed 85 % of tipping load.

Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes.
Crane operation is subject to the computer charts and operation manual both supplied with the crane.

August 2017. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the corresponding Operator's Manual when using our equipment or to otherwise act responsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex, Demag and Above, Ahead, Always are trademarks of or licensed by Terex Corporation or its subsidiaries.

© Terex Cranes 2017

TEREX CRANES GERMANY GMBH

Dinglerstraße 24
66482 Zweibrücken
Germany

E info.cranes@terex.com
T +49 6332 830

www.terex.com/cranes

[linkedin.com/company/demagmobilecranes](https://www.linkedin.com/company/demagmobilecranes)

[facebook.com/TerexCranes](https://www.facebook.com/TerexCranes)

[youtube.com/TerexCranesMarketing](https://www.youtube.com/TerexCranesMarketing)

DEMAG[®]
BY TEREX