



Absolutely The Best Crane Mats In The World.

This document is stored and available in the Raptor Tech Technical Document Repository.


To help our customers understand certain critical data points that factor into purchasing crane mats, Raptor Tech maintains a repository of technical documents with data from all major crane manufacturers.

You can visit Raptor Tech's repository to get crane specifications and technical details for crane models in addition to this model at:

<https://library.steelcranemats.com>


Thank You for Visiting the [SteelCraneMats.com](https://library.steelcranemats.com) Technical Specifications Document Repository.


AC 130-5

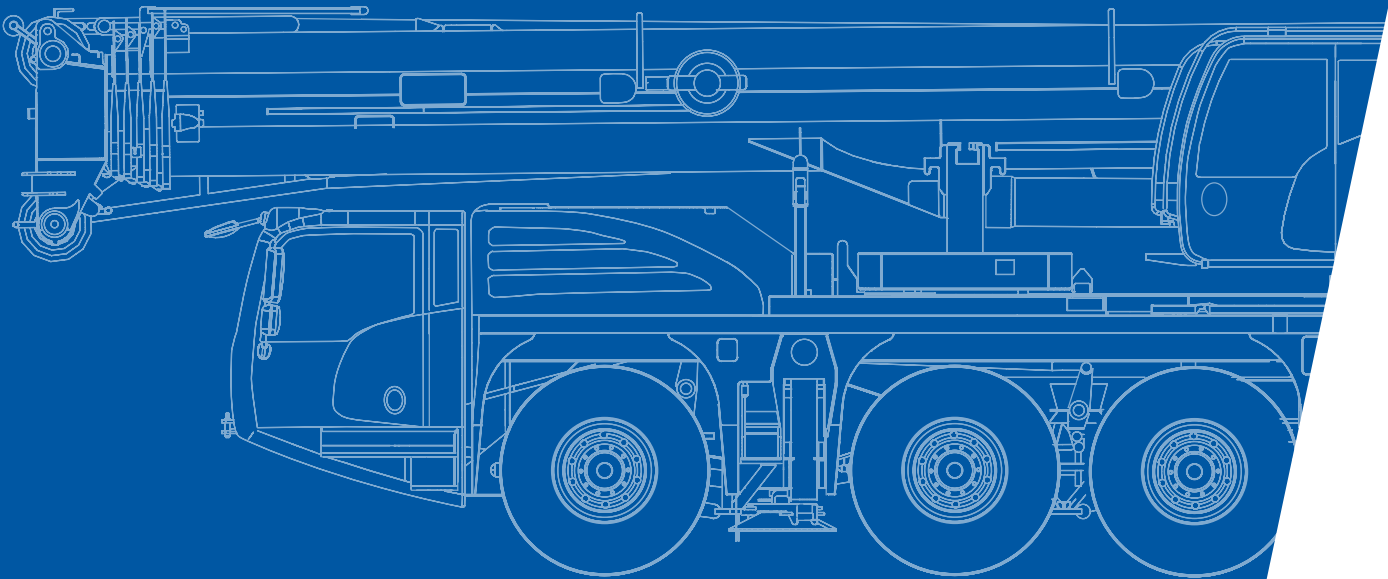



**All Terrain Crane
140 USt Capacity class**

	Page:
Dimensions	4
Specifications	6
Equipment	7
Counterweight	8

	HA Main boom	9
---	------------------------------	---

	HAV Folding swing-away jib	20
---	--	----

	HAV-VA Variable extension with swing-away jib	24
---	---	----

	MS Runner	28
---	---------------------------	----

Technical description	34
-----------------------------	----



Counterweight



Lifting capacities on outriggers · 360°



Radius



Main boom



Folding swing-away jib



Runner



Max. axle loads



Mechanism



Tires



Hook block



Hoist



Dolly



Travel speed



Gradeability – road



Gradeability – off road



Slewing



Boom telescoping



Boom elevation



Working speeds



Max. line pull



Rope diameter



Rope length



Hook block (capacity-sheaves-rope diameter)



Number of lines



Possible load of hook block



Weight of hook block



Distance head sheave axle – hook ground



Number of sheaves in boom head




Supporting force



Length of stroke (support cylinders)




Payload incl. rear storage box

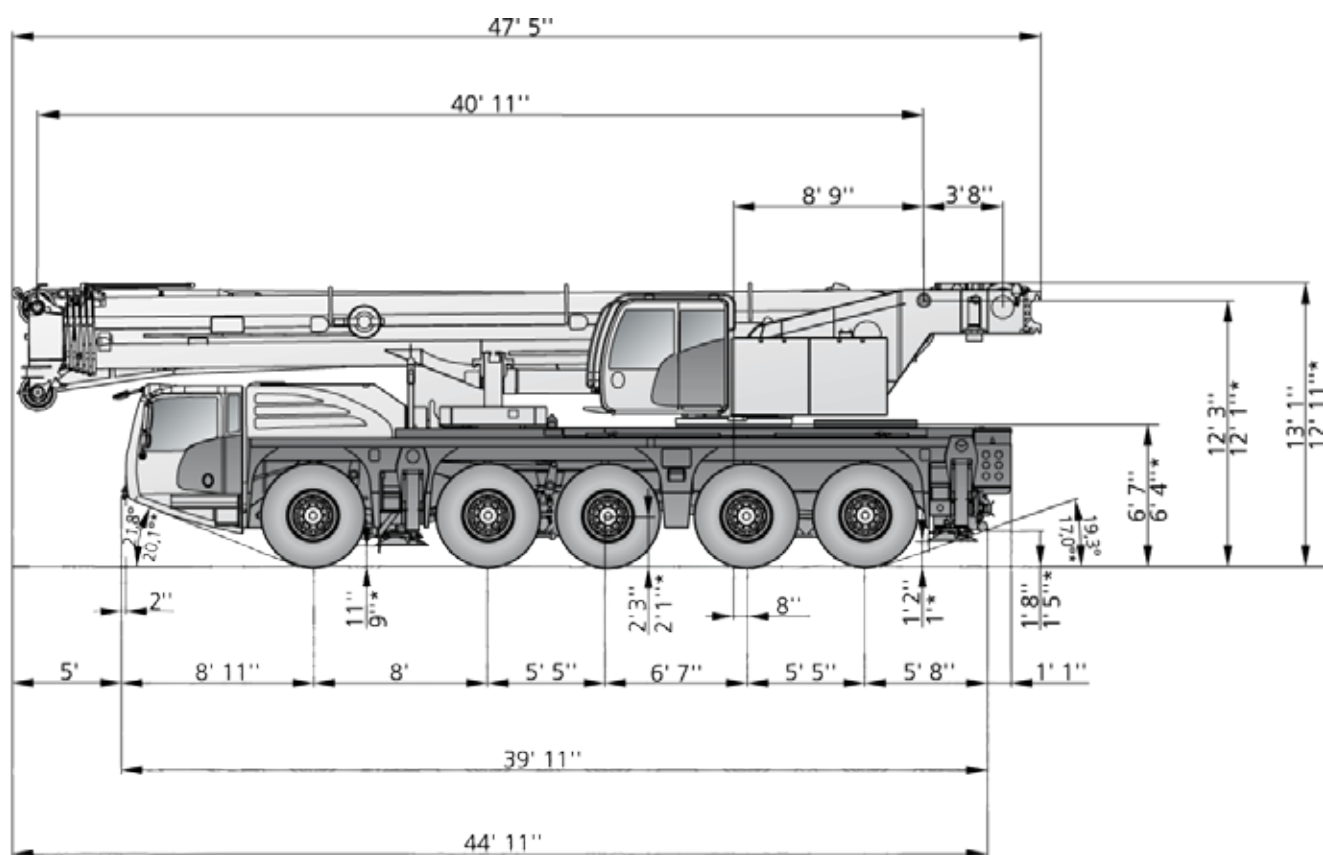

⊙ 445/95 R25 / 525/80 R25

* ⊙ 385/95 R25

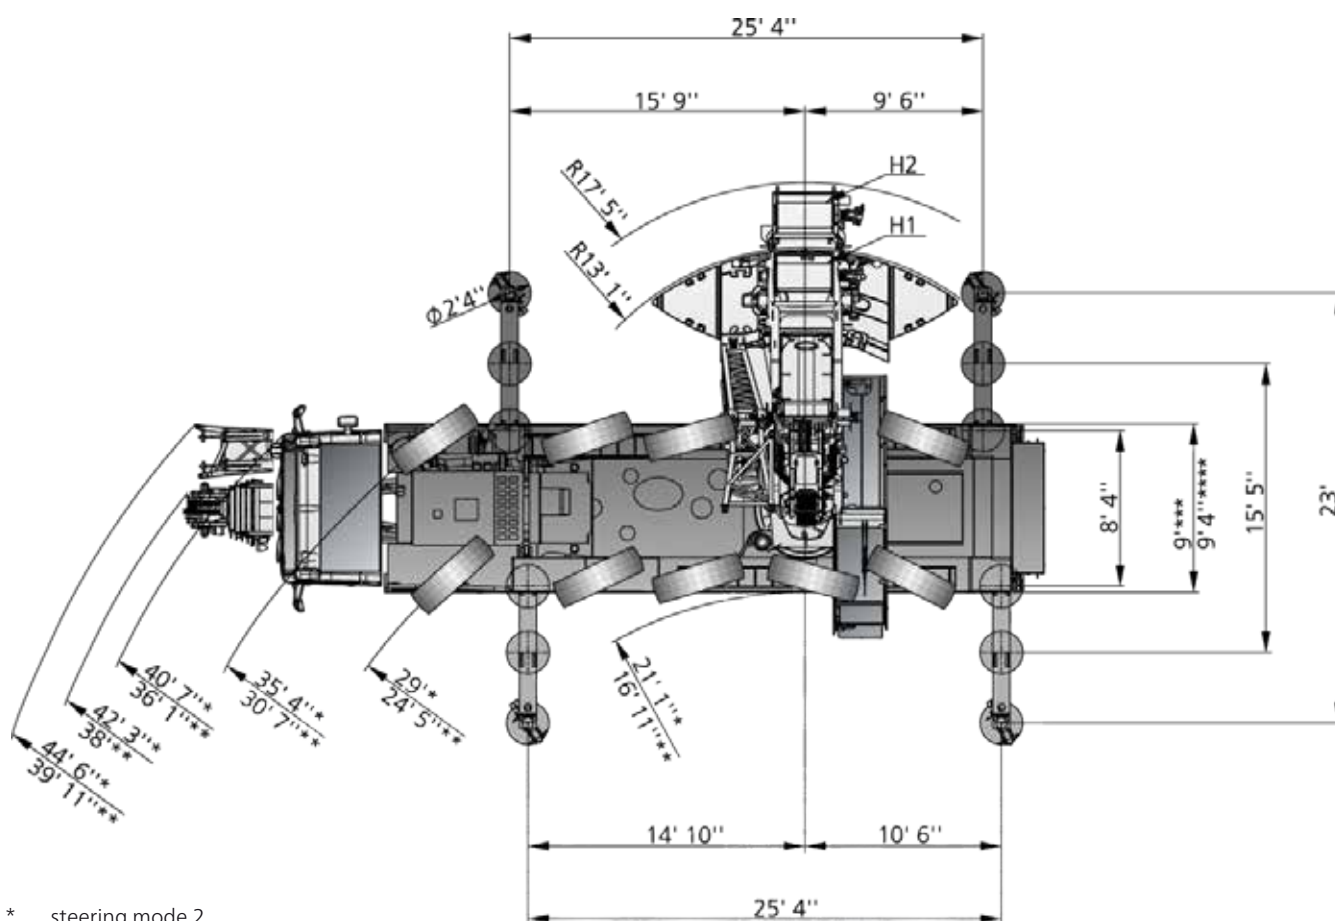

- * steering mode 2

```
** steering mode 3
```


***  385/95 R25 / 445/95 R25

****  525/80 R25

see page 6

Specifications

AC 130-5

									
	Total								
< 20,000 lb	On request!								X
17,000 lb	79,400 lb	10 x 6 x 10	385/95R25	–	–	8,200 lb	–	–	–
22,000 lb	105,800 lb	10 x 6 x 10	445/95R25	196.9 ft	–	–	–	1,100 lb	–
26,500 lb	132,300 lb	10 x 8 x 10	445/95R25	196.9 ft	12-0-21	23,600 lb	–	880 lb	–
26,500 lb	132,300 lb	10 x 8 x 10	445/95R25	196.9 ft	12-0-21	19,000 lb	68.9 ft	1,100 lb	–
35,300 lb	174,200 lb	10 x 8 x 10	445/95R25	196.9 ft	80-3-21	57,800 lb	68.9 ft	1,980 lb	–

	1 Highway > 28 mph		4* Off-wall
	2 City < 28 mph		5* Crab steer mode
	3* Minimum turning radius < 3.1 mph		6* All wheel steering

*must be activated

		
139,000 lb	161,000 lb	52.8 mph ¹⁾
20.9 in	24 in	


¹⁾ Depending on tire type, size and country specific legislation

			
	385 / 95 R 25 14.00 R 25	445 / 95 R 25 16.00 R 25	525 / 80 R 25 20.50 R 25
	47 %	40 %	40 %
	64 %	53 %	53 %


				
				
1	394 ft/min	18,525 lbf	0.83 in	984 ft
2	394 ft/min	18,525 lbf	0.83 in	1083 ft
	1,70 min ⁻¹			
	ca. 438 s (41.0 - 196.2 ft)			
	ca. 35 s (-1,5° - 82°)			

					
1	18,300	12-0-21	4	770 lb	6.6 ft
2	36,600	32-1-21	4	1320 lb	8.9 ft
3	54,500	32-1-21	4	1320 lb	8.9 ft
4	72,300	80-3-21	4	1870 lb	9.8 ft
5	90,000	80-3-21	4	1870 lb	9.8 ft
6	107,400	80-3-21	4	1870 lb	9.8 ft
7	124,600	80-3-21	4	1870 lb	9.8 ft
8	141,800	125-5-21	4	2480 lb	9.8 ft
9	158,800	125-5-21	4 + 2	2480 lb	9.8 ft
10	175,500	125-5-21	4 + 2	2480 lb	9.8 ft
11	192,000	160-7-21	4 + 2	3310 lb	9.8 ft
12	202,400	160-7-21	4 + 2	3310 lb	9.8 ft


HAV / HAV-VA

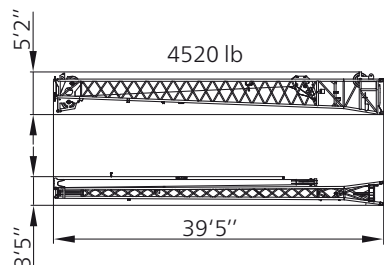


VA

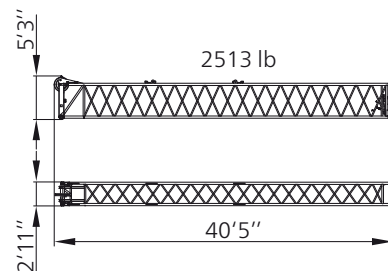


HAV-VA 108.3 ft

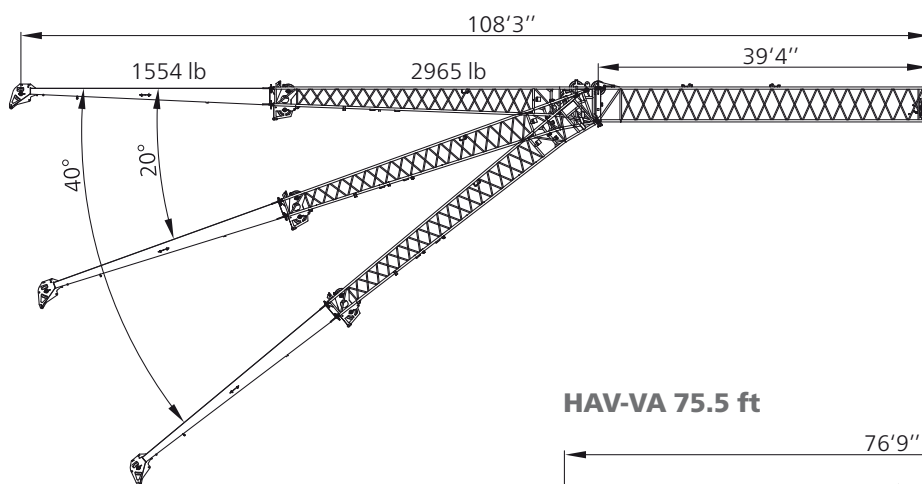


HAV-VA 75.5 ft

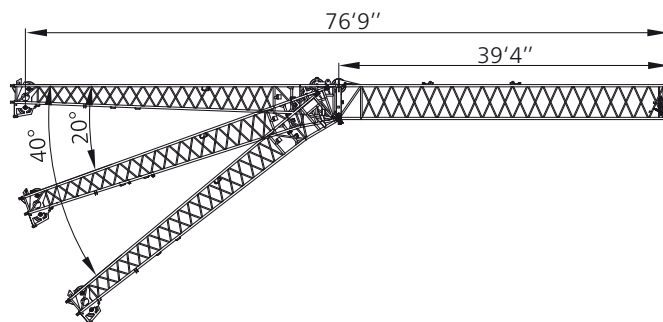


HAV 68.9 ft

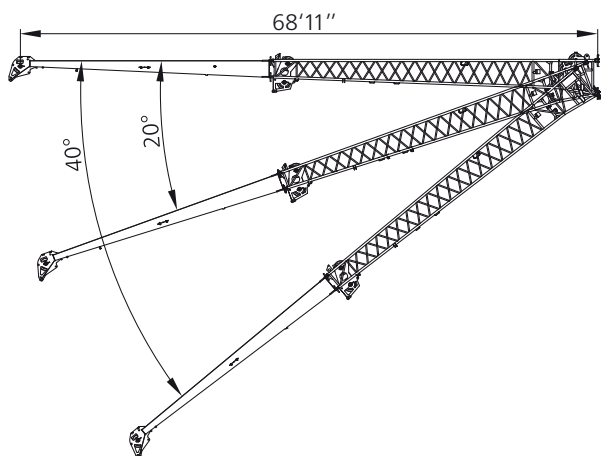

HAV 36.1 ft





Parts

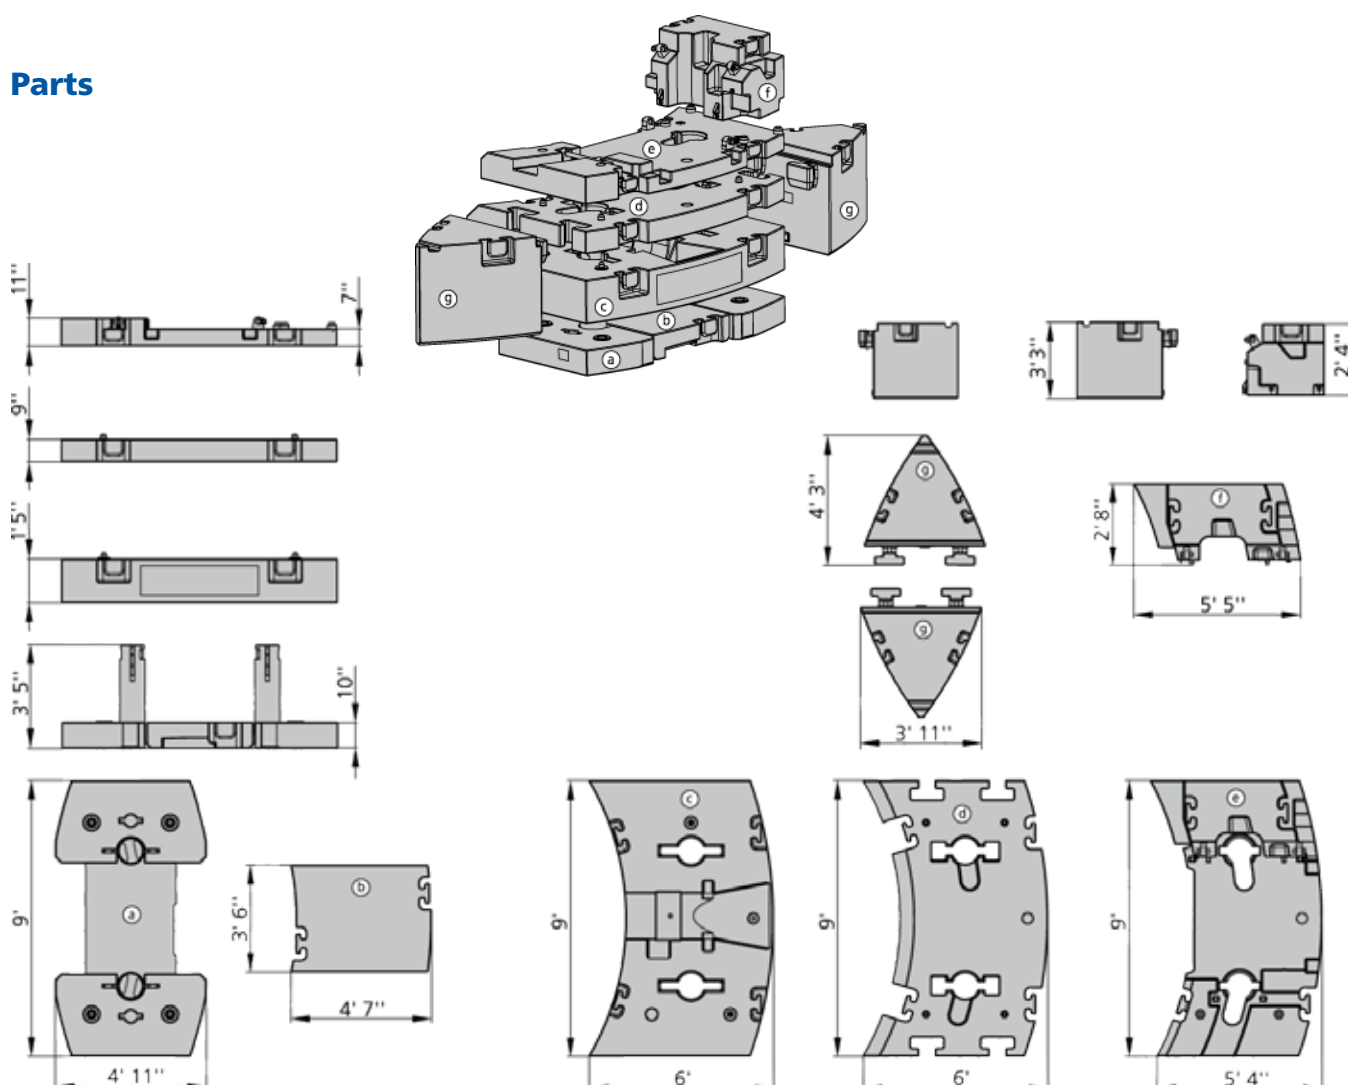

Configurations

	① 10,800 lb	② 4,630 lb	③ 24,260 lb	④ 11,910 lb	⑤ 9,920 lb	⑥ 8,200 lb	⑦ 11,690 lb	⑧ 11,690 lb
0 lb								
8,200 lb						X		
10,800 lb	X							
15,400 lb	X	X						
18,100 lb					X	X		
19,000 lb	X					X		
23,600 lb	X	X				X		
28,900 lb	X				X	X		
33,500 lb	X	X			X	X		
39,700 lb	X	X	X					
47,800 lb	X	X	X			X		
51,600 lb	X	X	X	X				
57,800 lb	X	X	X		X	X		
59,800 lb	X	X	X	X		X		
61,500 lb	X	X	X	X	X			
69,700 lb	X	X	X	X	X	X		
84,900 lb	X	X	X	X	X		X	X
93,000 lb	X	X	X	X	X	X	X	X

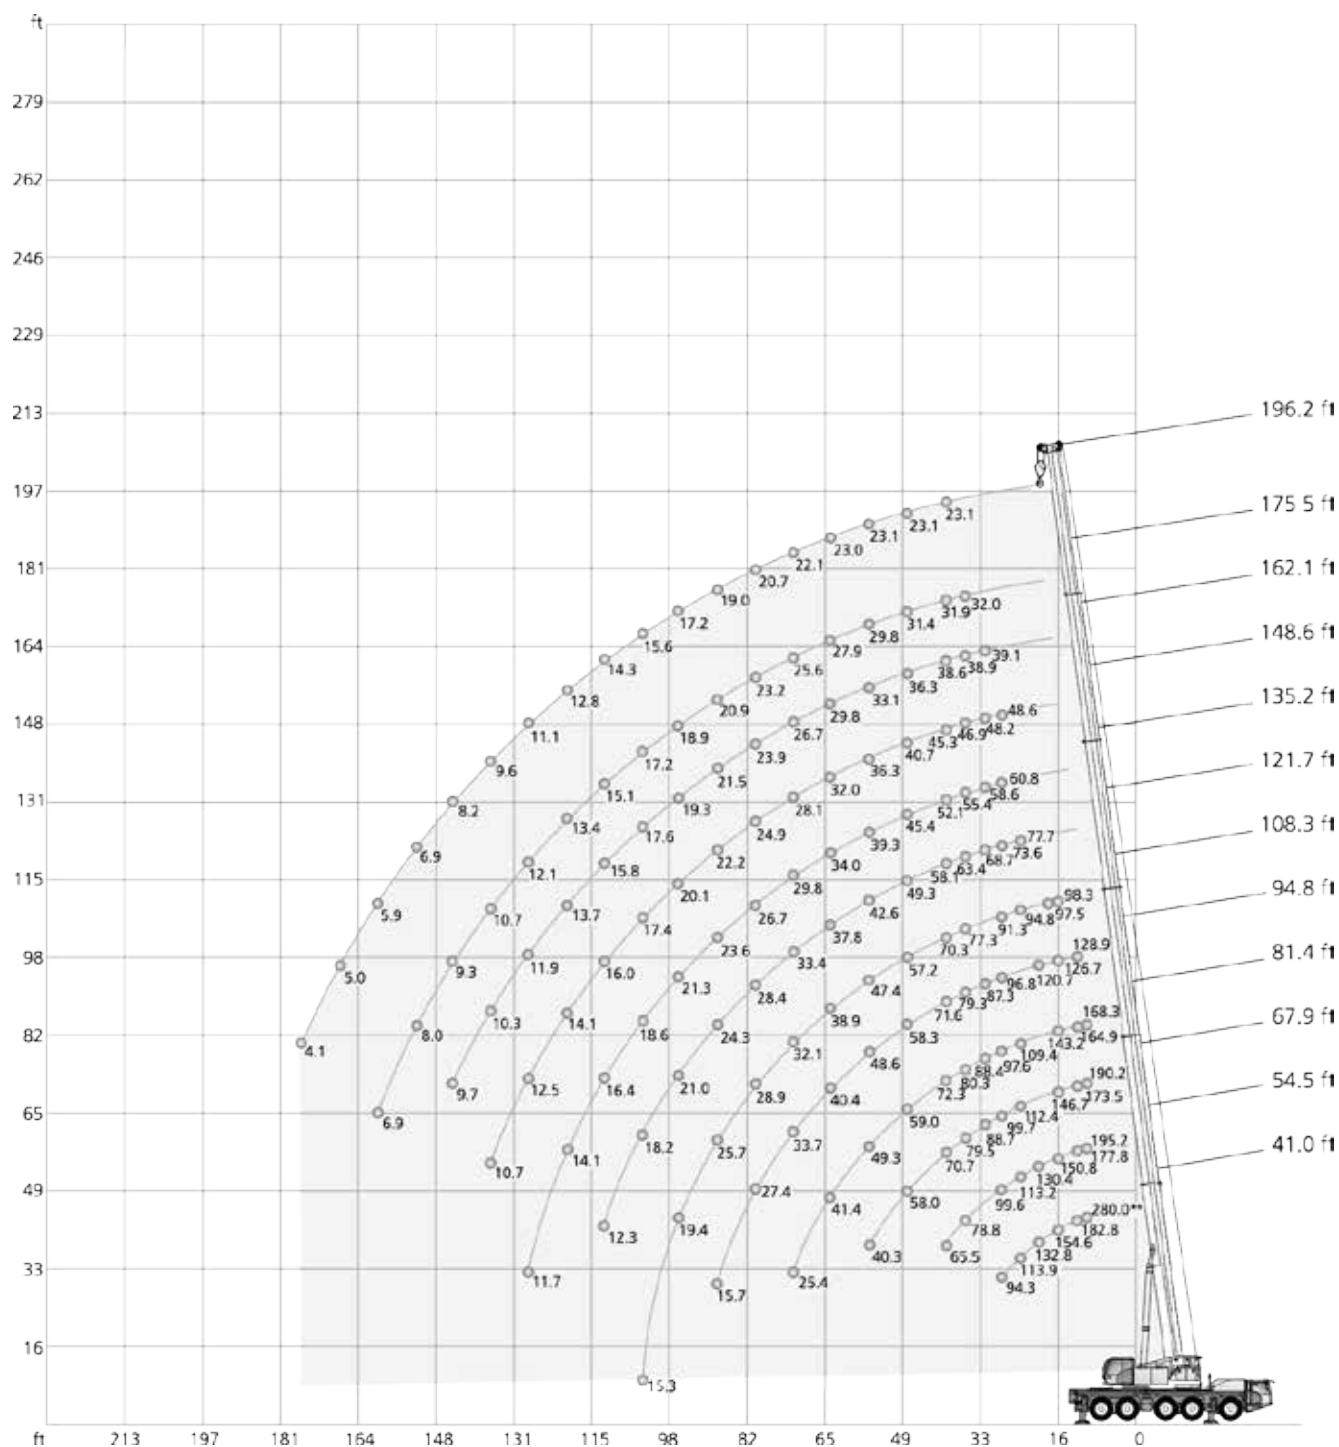

** Capacity class

 93,000 lb		 25.3 ft x 23.0 ft		360°		85 %								
 	41.0 ft*	41.0 ft	54.5 ft	67.9 ft	81.4 ft	94.8 ft	108.3 ft	121.7 ft	135.2 ft	148.6 ft	162.1 ft	175.5 ft	196.2 ft	
ft	1,000 lb													ft
10	280.0**	-	-	-	-	-	-	-	-	-	-	-	-	10
10	200.7	200.7	195.2	190.2	168.3	-	-	-	-	-	-	-	-	10
12	182.8	182.6	177.8	173.5	164.9	128.9	-	-	-	-	-	-	-	12
14	167.6	166.5	163.2	159.0	155.4	128.0	-	-	-	-	-	-	-	14
16	154.6	151.9	150.8	146.7	143.2	126.7	98.3	-	-	-	-	-	-	16
18	143.4	140.0	140.3	136.7	133.3	124.2	97.5	-	-	-	-	-	-	18
20	132.8	129.1	130.4	127.3	124.0	120.7	96.7	79.3	-	-	-	-	-	20
24	113.9	111.7	113.2	112.4	109.4	108.4	94.8	77.7	61.6	-	-	-	-	24
28	94.3	94.2	99.6	99.7	97.6	96.8	91.3	73.6	60.8	48.6	-	-	-	28
32	-	-	88.5	88.7	88.4	87.3	84.5	68.7	58.6	48.2	39.1	-	-	32
36	-	-	78.8	79.5	80.3	79.3	77.3	63.4	55.4	46.9	38.9	32.0	-	36
40	-	-	65.5	70.7	72.3	71.6	70.3	58.1	52.1	45.3	38.6	31.9	23.1	40
48	-	-	-	58.0	59.0	58.3	57.2	49.3	45.4	40.7	36.3	31.4	23.1	48
56	-	-	-	40.3	49.3	48.6	47.4	42.6	39.3	36.3	33.1	29.8	23.1	56
64	-	-	-	-	41.4	40.4	38.9	37.8	34.0	32.0	29.8	27.9	23.0	64
72	-	-	-	-	25.4	33.7	32.1	33.4	29.8	28.1	26.7	25.6	22.1	72
80	-	-	-	-	-	27.4	28.9	28.4	26.7	24.9	23.9	23.2	20.7	80
88	-	-	-	-	-	15.7	25.7	24.3	23.6	22.2	21.5	20.9	19.0	88
96	-	-	-	-	-	-	19.4	21.0	21.3	20.1	19.3	18.9	17.2	96
104	-	-	-	-	-	-	15.3	18.2	18.6	17.4	17.6	17.2	15.6	104
112	-	-	-	-	-	-	-	12.3	16.4	16.0	15.8	15.1	14.3	112
120	-	-	-	-	-	-	-	-	14.1	14.1	13.7	13.4	12.8	120
128	-	-	-	-	-	-	-	-	11.7	12.5	11.9	12.1	11.1	128
136	-	-	-	-	-	-	-	-	-	10.7	10.3	10.7	9.6	136
144	-	-	-	-	-	-	-	-	-	-	9.7	9.3	8.2	144
152	-	-	-	-	-	-	-	-	-	-	-	8.0	6.9	152
160	-	-	-	-	-	-	-	-	-	-	-	6.9	5.9	160
168	-	-	-	-	-	-	-	-	-	-	-	-	5.0	168
176	-	-	-	-	-	-	-	-	-	-	-	-	4.1	176
1)	34.6	34.6	25.1	19.4	15.0	11.9	9.0	7.1	4.9	2.9	-	-	-	1)

1) Capacities with horizontal boom

* over rear

** Capacity class

 69,700 lb		 25.3 ft x 23.0 ft		360° / Max.*								85%	
 360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft												ft	
1,000 lb													
10	200.7	200.7	195.2	195.2	190.2	190.2	168.3	168.3	-	-	-	-	10
12	181.8	182.6	177.8	177.9	173.5	173.5	164.9	164.9	128.9	128.9	-	-	12
14	164.7	166.5	163.2	163.2	159.0	159.0	155.4	155.4	128.0	128.0	-	-	14
16	150.3	151.9	150.8	150.8	146.7	146.7	143.2	143.2	126.7	126.7	98.3	98.3	16
18	138.5	140.0	139.7	140.3	136.7	136.7	133.3	133.3	124.2	124.2	97.5	97.5	18
20	127.6	129.1	129.1	130.4	127.3	127.3	124.0	124.0	120.7	120.7	96.7	96.7	20
24	110.4	111.7	112.0	113.2	112.1	112.3	109.4	109.4	108.4	108.4	94.8	94.8	24
28	93.7	94.2	97.6	99.6	97.8	99.6	96.8	97.6	96.8	96.8	91.3	91.3	28
32	-	-	84.7	87.9	84.9	88.0	86.3	88.4	85.7	87.3	84.0	84.5	32
36	-	-	74.7	77.5	75.1	77.6	76.6	78.9	75.9	77.9	74.8	75.9	36
40	-	-	61.3	63.2	67.0	67.9	67.6	69.4	66.9	68.7	65.7	67.4	40
48	-	-	-	-	52.9	56.4	52.7	56.2	51.6	55.3	50.0	54.0	48
56	-	-	-	-	36.8	39.1	41.3	46.0	40.3	45.1	38.8	43.7	56
64	-	-	-	-	-	-	33.4	37.7	32.5	36.8	33.5	35.5	64
72	-	-	-	-	-	-	25.4	25.4	28.5	30.6	27.9	31.6	72
80	-	-	-	-	-	-	-	-	24.3	25.6	23.5	27.1	80
88	-	-	-	-	-	-	-	-	15.7	15.7	20.2	23.4	88
96	-	-	-	-	-	-	-	-	-	-	17.7	18.6	96
104	-	-	-	-	-	-	-	-	-	-	15.3	15.3	104
1)	34.6	34.6	25.1	25.1	19.4	19.4	15.0	15.0	11.9	11.9	9.0	9.0	1)

 360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft		
ft												ft	
1,000 lb													
20	79.3	79.3	-	-	-	-	-	-	-	-	-	-	20
24	77.7	77.7	61.6	61.6	-	-	-	-	-	-	-	-	24
28	73.6	73.6	60.8	60.8	48.6	48.6	-	-	-	-	-	-	28
32	68.7	68.7	58.6	58.6	48.2	48.2	39.1	39.1	-	-	-	-	32
36	63.4	63.4	55.4	55.4	46.9	46.9	38.9	38.9	32.0	32.0	-	-	36
40	58.1	58.1	52.1	52.1	45.3	45.3	38.6	38.6	31.9	31.9	23.1	23.1	40
48	48.4	49.3	45.3	45.4	40.7	40.7	36.3	36.3	31.4	31.4	23.1	23.1	48
56	40.0	42.2	37.5	39.3	36.1	36.3	33.1	33.1	29.8	29.8	23.1	23.1	56
64	32.3	36.5	31.0	33.9	30.5	32.0	29.8	29.8	27.9	27.9	23.0	23.0	64
72	26.4	30.6	27.0	29.2	25.7	28.1	25.9	26.7	25.6	25.6	22.1	22.1	72
80	23.3	25.8	22.8	25.5	22.2	24.4	22.2	23.8	21.7	23.2	20.6	20.7	80
88	20.4	22.1	19.2	22.5	19.5	21.4	18.8	21.2	18.8	20.9	18.1	19.0	88
96	17.6	19.7	17.2	19.6	16.9	18.8	16.1	19.0	16.1	18.5	15.1	17.2	96
104	15.3	18.1	15.1	17.1	14.6	17.0	14.5	16.6	13.5	16.0	12.6	15.6	104
112	12.3	12.3	13.3	14.9	12.5	14.9	12.5	14.2	11.6	14.4	10.5	13.6	112
120	-	-	11.5	13.3	10.6	13.4	10.6	12.4	9.8	12.6	8.7	11.7	120
128	-	-	10.0	11.7	9.1	11.9	9.1	11.2	8.3	11.0	7.2	10.1	128
136	-	-	-	-	8.0	10.1	8.0	10.3	6.9	9.6	6.0	8.7	136
144	-	-	-	-	-	-	6.9	9.3	5.8	8.4	4.7	7.5	144
152	-	-	-	-	-	-	-	-	4.7	7.4	3.8	6.3	152
160	-	-	-	-	-	-	-	-	3.9	6.4	2.8	5.4	160
168	-	-	-	-	-	-	-	-	-	-	-	4.5	168
176	-	-	-	-	-	-	-	-	-	-	-	3.8	176
1)	7.1	7.1	4.9	4.9	2.9	2.9	-	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

 57,800 lb		 25.3 ft x 23.0 ft		360° / Max.*								85%	
 360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft	1,000 lb											ft	
10	200.6	200.7	195.2	195.2	190.2	190.2	168.3	168.3	-	-	-	10	
12	180.7	182.6	177.8	177.9	173.5	173.5	164.9	164.9	128.9	128.9	-	12	
14	163.8	166.5	163.2	163.2	159.0	159.0	155.4	155.4	128.0	128.0	-	14	
16	149.5	151.9	150.6	150.8	146.7	146.7	143.2	143.2	126.7	126.7	98.3	16	
18	137.8	140.0	139.3	140.3	136.7	136.7	133.3	133.3	124.2	124.2	97.5	18	
20	126.9	129.1	128.5	130.4	127.3	127.3	124.0	124.0	120.7	120.7	96.7	20	
24	108.9	111.7	110.8	113.2	110.9	112.3	108.9	109.4	108.4	108.4	94.8	24	
28	92.1	94.2	94.6	98.3	94.9	98.5	95.4	97.0	95.5	96.8	91.0	28	
32	-	-	81.8	84.6	82.0	84.7	83.7	86.1	82.9	85.3	80.4	32	
36	-	-	70.4	74.2	71.0	74.3	72.6	75.9	71.7	75.1	69.2	36	
40	-	-	54.1	60.7	62.2	67.0	61.9	66.6	61.0	65.7	59.1	40	
48	-	-	-	-	46.6	53.8	46.3	53.6	45.3	52.9	44.6	48	
56	-	-	-	-	34.2	37.9	36.0	44.4	35.4	43.6	36.6	56	
64	-	-	-	-	-	-	29.0	37.1	30.1	36.2	29.3	64	
72	-	-	-	-	-	-	25.4	25.4	25.0	30.5	24.1	72	
80	-	-	-	-	-	-	-	-	21.1	25.6	21.0	80	
88	-	-	-	-	-	-	-	-	15.7	15.7	18.3	88	
96	-	-	-	-	-	-	-	-	-	-	15.9	96	
104	-	-	-	-	-	-	-	-	-	-	13.9	104	
1)	34.6	34.6	25.1	25.1	19.4	19.4	15.0	15.0	11.9	11.9	9.0	1)	

 360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	
ft												ft
1,000 lb												
20	79.3	79.3	-	-	-	-	-	-	-	-	-	20
24	77.7	77.7	61.6	61.6	-	-	-	-	-	-	-	24
28	73.6	73.6	60.8	60.8	48.6	48.6	-	-	-	-	-	28
32	68.7	68.7	58.6	58.6	48.2	48.2	39.1	39.1	-	-	-	32
36	62.9	63.4	55.4	55.4	46.9	46.9	38.9	38.9	32.0	32.0	-	36
40	56.6	58.1	51.9	52.1	45.3	45.3	38.6	38.6	31.9	31.9	23.1	40
48	45.2	49.3	42.2	45.4	40.2	40.7	36.3	36.3	31.4	31.4	23.1	48
56	34.9	41.9	34.2	39.3	33.2	36.3	32.4	33.1	29.8	29.8	23.1	56
64	28.6	36.1	28.6	33.9	27.5	32.0	27.5	29.8	26.9	27.9	23.0	64
72	24.4	30.5	23.3	29.2	23.9	28.1	22.8	26.7	23.0	25.6	21.9	72
80	20.4	25.8	20.4	25.5	20.0	24.4	19.8	23.8	19.1	23.2	18.0	80
88	17.4	22.1	17.4	22.5	16.9	21.4	16.9	21.2	16.0	20.9	14.9	88
96	15.3	19.7	15.1	19.6	14.2	18.8	14.2	19.0	13.3	18.5	12.2	96
104	13.4	18.1	12.8	17.1	11.9	17.0	11.9	16.6	11.1	16.0	10.0	104
112	11.6	12.3	10.9	14.9	10.0	14.9	10.0	14.2	9.2	14.4	8.1	112
120	-	-	9.4	13.3	8.5	13.4	8.5	12.4	7.6	12.6	6.5	120
128	-	-	8.0	11.7	7.2	11.9	7.2	11.2	6.2	11.0	5.2	128
136	-	-	-	-	6.0	10.1	6.0	10.3	4.9	9.6	4.0	136
144	-	-	-	-	-	-	4.9	9.3	4.0	8.4	2.9	144
152	-	-	-	-	-	-	-	-	3.0	7.4	-	152
160	-	-	-	-	-	-	-	-	-	6.4	-	160
168	-	-	-	-	-	-	-	-	-	-	-	168
176	-	-	-	-	-	-	-	-	-	-	-	176
1)	7.1	7.1	4.9	4.9	2.9	2.9	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

 23,600 lb		 25.3 ft x 23.0 ft		360° / Max.*								85%	
 360° 41.0 ft	Max. 41.0 ft	 360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft	1,000 lb											ft	
10	198.1	200.7	195.2	195.2	190.2	190.2	168.3	168.3	-	-	-	10	
12	178.1	182.6	177.8	177.9	173.5	173.5	164.9	164.9	128.9	128.9	-	12	
14	161.3	166.5	162.6	163.2	159.0	159.0	155.4	155.4	128.0	128.0	-	14	
16	147.3	151.9	148.7	150.8	146.7	146.7	143.2	143.2	126.7	126.7	98.3	16	
18	133.1	139.3	134.8	140.0	134.1	136.7	129.0	133.3	116.6	124.2	97.5	18	
20	119.1	126.9	121.3	129.1	121.0	126.7	114.1	123.7	109.0	120.6	95.3	20	
24	95.2	102.6	97.9	104.6	94.5	104.8	91.5	104.1	84.7	105.8	77.8	24	
28	69.8	85.2	74.4	87.2	76.3	87.3	73.4	89.1	68.3	88.0	63.9	28	
32	-	-	57.9	74.3	59.5	76.2	59.0	75.7	56.4	73.4	55.5	32	
36	-	-	47.4	64.8	48.8	65.7	48.6	65.4	48.2	62.9	47.6	36	
40	-	-	31.8	51.4	41.0	57.7	41.0	57.4	41.4	54.4	40.3	40	
48	-	-	-	-	30.5	44.2	31.0	43.9	30.3	42.1	30.9	48	
56	-	-	-	-	23.3	33.4	23.9	34.8	23.9	35.1	24.0	56	
64	-	-	-	-	-	-	18.8	28.2	19.2	29.5	18.9	64	
72	-	-	-	-	-	-	15.1	24.3	15.5	23.9	15.1	72	
80	-	-	-	-	-	-	-	-	12.6	20.0	12.2	80	
88	-	-	-	-	-	-	-	-	10.4	15.7	9.9	88	
96	-	-	-	-	-	-	-	-	-	-	8.1	96	
104	-	-	-	-	-	-	-	-	-	-	6.6	104	
1)	34.6	34.6	25.1	25.1	19.4	19.4	14.8	15.0	10.6	11.9	7.3	1)	

 360° 121.7 ft	Max. 121.7 ft	 360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	
ft												ft
1,000 lb												
20	79.0	79.3	-	-	-	-	-	-	-	-	-	20
24	71.6	77.7	61.0	61.6	-	-	-	-	-	-	-	24
28	60.9	73.6	54.9	60.8	48.6	48.6	-	-	-	-	-	28
32	51.0	67.4	48.9	58.6	44.6	48.2	39.1	39.1	-	-	-	32
36	44.4	59.1	42.7	53.5	39.5	46.9	35.8	38.9	32.0	32.0	-	36
40	39.7	52.6	37.9	48.6	36.3	44.8	33.1	38.6	31.3	31.9	23.1	40
48	30.7	41.1	29.4	38.2	27.9	36.5	27.0	34.2	24.9	31.1	21.9	48
56	23.7	32.2	23.0	31.7	21.9	30.2	21.1	28.7	19.4	26.8	17.3	56
64	18.7	27.9	17.9	25.6	17.0	25.6	16.7	24.4	15.1	22.6	13.2	64
72	14.9	23.5	14.2	22.6	13.1	21.0	13.1	20.4	11.5	18.4	9.8	72
80	12.0	19.3	11.3	19.2	10.2	17.9	10.2	17.2	8.9	15.5	7.2	80
88	9.6	16.9	8.8	16.3	8.0	15.3	8.0	14.6	6.9	13.1	5.2	88
96	7.8	14.5	7.0	13.7	6.1	12.9	6.1	12.5	5.1	10.9	3.6	96
104	6.2	12.4	5.5	11.7	4.6	10.6	4.6	10.6	3.7	9.1	-	104
112	5.0	10.5	4.1	9.8	3.2	8.9	3.2	8.9	-	7.6	-	112
120	-	-	3.1	8.2	-	7.4	-	7.4	-	6.3	-	120
128	-	-	-	6.8	-	6.1	-	6.1	-	5.1	-	128
136	-	-	-	-	-	5.0	-	5.0	-	4.1	-	136
144	-	-	-	-	-	-	-	-	-	3.1	-	144
1)	4.9	7.1	2.2	4.9	-	2.9	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

19,000 lb		25.3 ft x 23.0 ft		360° / Max.*								85%	
ft	360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft	ft
1,000 lb													
10	197.7	200.7	195.2	195.2	190.2	190.2	168.3	168.3	-	-	-	-	10
12	177.7	182.6	177.8	177.9	173.5	173.5	164.9	164.9	128.9	128.9	-	-	12
14	161.1	166.5	162.4	163.2	159.0	159.0	155.4	155.4	128.0	128.0	-	-	14
16	146.2	151.9	148.2	150.8	146.7	146.7	143.2	143.2	126.7	126.7	98.3	98.3	16
18	131.5	138.1	133.7	138.8	132.2	136.7	125.2	133.3	113.0	124.2	95.7	97.5	18
20	117.0	124.5	119.2	126.7	116.8	126.5	111.3	123.5	101.9	120.4	91.5	96.7	20
24	89.7	100.7	92.7	102.7	91.2	102.9	85.4	103.1	79.0	103.8	73.5	93.2	24
28	64.4	83.7	69.8	85.6	71.0	86.0	68.3	87.2	63.5	84.7	61.4	80.7	28
32	-	-	53.7	73.2	55.3	74.4	54.9	72.9	54.5	70.5	51.7	67.9	32
36	-	-	43.8	63.6	45.3	64.4	45.1	63.3	46.5	60.5	44.1	58.4	36
40	-	-	28.5	49.1	37.9	56.4	39.0	54.2	38.4	52.3	38.0	51.2	40
48	-	-	-	-	28.0	42.0	28.6	41.8	28.9	40.8	28.7	41.9	48
56	-	-	-	-	21.3	32.8	21.8	33.2	22.4	34.2	22.0	32.6	56
64	-	-	-	-	-	-	17.1	27.3	17.6	27.5	17.2	26.3	64
72	-	-	-	-	-	-	13.7	22.8	14.2	22.2	13.7	22.6	72
80	-	-	-	-	-	-	-	-	11.3	19.1	10.9	18.7	80
88	-	-	-	-	-	-	-	-	9.3	15.7	8.8	15.8	88
96	-	-	-	-	-	-	-	-	-	-	7.0	13.4	96
104	-	-	-	-	-	-	-	-	-	-	5.7	11.5	104
1)	34.6	34.6	25.1	25.1	19.0	19.4	13.2	15.0	9.5	11.9	6.2	9.0	1)

ft	360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	ft
1,000 lb													
20	78,5	79,3	-	-	-	-	-	-	-	-	-	-	20
24	67,1	77,7	59,5	61,6	-	-	-	-	-	-	-	-	24
28	56,7	73,6	52,7	60,8	46,5	48,6	-	-	-	-	-	-	28
32	48,5	64,6	45,9	58,6	42,6	48,2	38,2	39,1	-	-	-	-	32
36	42,3	55,6	39,8	51,3	38,0	45,5	34,4	38,9	30,5	32,0	-	-	36
40	36,7	49,7	35,2	45,1	33,3	42,1	32,0	38,3	28,3	31,9	23,0	23,1	40
48	28,5	37,5	26,9	36,7	25,5	33,9	24,5	33,0	22,4	30,1	20,2	23,1	48
56	21,8	31,2	20,9	29,1	19,7	28,8	19,0	27,0	17,3	25,1	15,2	21,9	56
64	17,0	25,9	16,3	24,7	15,2	23,2	14,9	22,3	13,2	20,3	11,1	18,1	64
72	13,3	21,7	12,6	20,8	11,5	19,3	11,5	18,6	10,0	16,6	8,0	14,8	72
80	10,6	18,5	9,8	17,6	8,9	16,3	8,9	15,5	7,4	13,9	5,7	12,2	80
88	8,4	15,8	7,7	14,8	6,6	13,8	6,9	13,2	5,5	11,6	3,9	9,9	88
96	6,7	13,1	5,9	12,4	4,9	11,5	5,1	11,2	3,9	9,6	-	7,8	96
104	5,2	11,0	4,4	10,2	3,5	9,3	3,5	9,3	2,6	7,9	-	6,2	104
112	4,1	9,4	3,2	8,5	-	7,8	-	7,8	-	6,3	-	4,8	112
120	-	-	-	7,2	-	6,4	-	6,4	-	5,0	-	3,5	120
128	-	-	-	6,2	-	5,3	-	5,3	-	4,1	-	2,5	128
136	-	-	-	-	-	4,2	-	4,2	-	3,1	-	-	136
144	-	-	-	-	-	-	-	3,3	-	2,4	-	-	144
1)	3.7	7.1	-	4.9	-	2.9	-	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

 69,700 lb		 25.3 ft x 15.4 ft		360° / Max.*								85%	
 360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft	1,000 lb												ft
10	-	200.7	-	195.2	-	190.2	-	168.3	-	-	-	-	10
12	162.6	182.6	164.1	177.9	164.4	173.5	162.6	164.9	128.9	128.9	-	-	12
14	145.6	166.5	147.2	163.2	147.4	159.0	147.0	155.4	126.3	128.0	-	-	14
16	131.5	151.9	133.0	150.8	133.2	146.7	128.8	143.2	118.9	126.7	98.3	98.3	16
18	118.1	140.0	120.4	140.3	120.8	136.7	114.2	133.3	107.2	124.2	92.7	97.5	18
20	104.5	129.1	107.5	130.4	108.0	127.3	103.2	124.0	94.9	120.7	87.4	96.7	20
24	76.4	111.7	80.4	113.2	81.7	112.3	81.5	109.4	77.2	108.4	72.1	94.8	24
28	59.1	94.2	62.5	99.6	63.7	99.6	63.6	97.6	62.8	96.8	62.0	91.3	28
32	-	-	50.6	87.9	51.7	88.0	51.6	88.4	52.5	87.3	52.0	84.5	32
36	-	-	42.7	77.5	43.7	77.6	43.7	78.9	44.8	77.9	44.0	75.9	36
40	-	-	31.0	63.2	37.6	67.9	38.5	69.4	37.8	68.7	38.1	67.4	40
48	-	-	-	-	29.1	56.4	29.5	56.2	29.5	55.3	29.3	54.0	48
56	-	-	-	-	23.0	39.1	23.3	46.0	23.4	45.1	23.6	43.7	56
64	-	-	-	-	-	-	19.1	37.7	19.3	36.8	19.1	35.5	64
72	-	-	-	-	-	-	15.7	25.4	15.9	30.6	15.7	31.6	72
80	-	-	-	-	-	-	-	-	13.6	25.6	13.3	27.1	80
88	-	-	-	-	-	-	-	-	11.6	15.7	11.3	23.4	88
96	-	-	-	-	-	-	-	-	-	-	9.7	18.6	96
104	-	-	-	-	-	-	-	-	-	-	8.3	15.3	104
1)	34.6	34.6	25.1	25.1	19.4	19.4	15.0	15.0	11.9	11.9	9.0	9.0	1)

	360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	
ft	1,000 lb												ft
20	78.3	79.3	-	-	-	-	-	-	-	-	-	-	20
24	67.3	77.7	59.9	61.6	-	-	-	-	-	-	-	-	24
28	58.0	73.6	53.4	60.8	47.9	48.6	-	-	-	-	-	-	28
32	50.3	68.7	48.1	58.6	44.1	48.2	39.1	39.1	-	-	-	-	32
36	43.6	63.4	42.2	55.4	39.7	46.9	36.2	38.9	32.0	32.0	-	-	36
40	37.4	58.1	37.4	52.1	36.7	45.3	34.0	38.6	31.5	31.9	23.1	23.1	40
48	29.2	49.3	28.8	45.4	28.0	40.7	28.2	36.3	26.6	31.4	22.7	23.1	48
56	23.3	42.2	22.7	39.3	22.0	36.3	22.0	33.1	21.4	29.8	19.7	23.1	56
64	18.9	36.5	18.4	33.9	17.7	32.0	17.7	29.8	17.1	27.9	16.1	23.0	64
72	15.5	30.6	15.1	29.2	14.4	28.1	14.4	26.7	13.7	25.6	13.1	22.1	72
80	13.1	25.8	12.5	25.5	12.0	24.4	12.0	23.8	11.3	23.2	10.7	20.7	80
88	11.1	22.1	10.6	22.5	9.9	21.4	9.9	21.2	9.3	20.9	8.6	19.0	88
96	9.4	19.7	8.9	19.6	8.3	18.8	8.3	19.0	7.7	18.5	7.0	17.2	96
104	8.1	18.1	7.4	17.1	7.0	17.0	7.0	16.6	6.3	16.0	5.7	15.6	104
112	7.0	12.3	6.3	14.9	5.9	14.9	5.9	14.2	5.2	14.4	4.3	13.6	112
120	-	-	5.5	13.3	4.8	13.4	4.8	12.4	3.9	12.6	3.1	11.7	120
128	-	-	4.5	11.7	3.9	11.9	3.9	11.2	3.0	11.0	-	10.1	128
136	-	-	-	-	3.0	10.1	3.0	10.3	-	9.6	-	8.7	136
144	-	-	-	-	-	-	-	9.3	-	8.4	-	7.5	144
152	-	-	-	-	-	-	-	-	-	7.4	-	6.3	152
160	-	-	-	-	-	-	-	-	-	6.4	-	5.4	160
168	-	-	-	-	-	-	-	-	-	-	-	4.5	168
176	-	-	-	-	-	-	-	-	-	-	-	3.8	176
1)	6.8	7.1	4.6	4.9	2.6	2.9	-	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

57,800 lb		25.3 ft x 15.4 ft		360° / Max.*								85%	
ft	360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft	ft
1,000 lb													
10	181.0	200.7	182.4	195.2	182.6	190.2	168.2	168.3	-	-	-	-	10
12	160.2	182.6	161.8	177.9	162.0	173.5	158.7	164.9	127.6	128.9	-	-	12
14	143.4	166.5	145.1	163.2	145.2	159.0	132.8	155.4	120.1	128.0	-	-	14
16	129.4	151.9	131.2	150.8	126.2	146.7	117.6	143.2	106.5	126.7	95.4	98.3	16
18	110.9	140.0	113.2	140.3	109.8	136.7	103.6	133.3	94.2	124.2	86.5	97.5	18
20	92.0	129.1	94.8	130.4	98.1	127.3	90.9	124.0	83.1	120.7	78.2	96.7	20
24	66.8	111.7	70.9	113.2	72.1	112.3	71.9	109.4	67.8	108.4	65.8	94.8	24
28	51.5	94.2	55.0	98.3	56.1	98.5	55.9	97.0	57.1	96.8	55.2	91.3	28
32	-	-	44.2	84.6	46.0	84.7	46.8	86.1	46.5	85.3	45.8	83.7	32
36	-	-	37.2	74.2	39.1	74.3	39.9	75.9	39.3	75.1	39.3	74.0	36
40	-	-	26.3	60.7	33.3	67.0	33.7	66.6	33.7	65.7	33.7	64.6	40
48	-	-	-	-	25.1	53.5	25.5	53.2	26.0	52.5	25.7	51.1	48
56	-	-	-	-	19.8	37.4	20.0	42.3	20.5	41.4	20.3	39.9	56
64	-	-	-	-	-	-	16.1	34.4	16.6	33.3	16.4	34.2	64
72	-	-	-	-	-	-	13.3	25.4	13.7	28.5	13.3	29.0	72
80	-	-	-	-	-	-	-	-	11.4	24.9	11.2	24.3	80
88	-	-	-	-	-	-	-	-	9.7	15.7	9.4	21.0	88
96	-	-	-	-	-	-	-	-	-	-	7.9	17.8	96
104	-	-	-	-	-	-	-	-	-	-	6.7	15.3	104
1)	34.6	34.6	25.1	25.1	17.9	19.4	13.0	15.0	9.9	11.9	7.3	9.0	1)

ft	360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	ft
1,000 lb													
20	72.4	79.3	-	-	-	-	-	-	-	-	-	-	20
24	59.8	77.7	55.4	61.6	-	-	-	-	-	-	-	-	24
28	51.9	73.6	48.7	60.8	43.9	48.6	-	-	-	-	-	-	28
32	45.5	68.7	43.3	58.6	40.8	48.2	36.9	39.1	-	-	-	-	32
36	38.8	63.4	37.9	55.4	36.1	46.9	33.2	38.9	29.9	32.0	-	-	36
40	33.7	58.1	32.8	52.1	31.6	45.3	30.4	38.6	27.8	31.9	23.0	23.1	40
48	25.5	48.9	24.9	45.4	24.2	40.7	24.1	36.3	22.3	31.4	20.2	23.1	48
56	20.0	40.7	19.6	38.4	18.8	36.3	18.9	33.1	18.0	29.8	16.1	23.1	56
64	16.1	33.2	15.7	31.9	15.0	31.1	15.0	29.8	14.4	27.9	12.8	23.0	64
72	13.3	27.5	12.6	27.8	12.0	26.8	12.0	26.1	11.3	25.6	10.2	22.1	72
80	10.9	23.5	10.5	23.5	9.8	22.4	9.8	23.0	9.2	22.4	8.1	20.7	80
88	9.2	21.1	8.7	20.2	8.1	20.2	8.1	19.7	7.4	19.3	6.3	18.7	88
96	7.7	18.5	7.2	17.3	6.6	17.7	6.6	16.8	5.9	17.0	4.8	16.0	96
104	6.5	16.0	5.9	15.8	5.4	15.3	5.4	14.7	4.6	14.6	3.5	13.5	104
112	5.5	12.3	5.0	13.8	4.1	13.4	4.1	13.4	3.5	12.5	-	11.6	112
120	-	-	3.9	12.3	3.1	11.7	3.1	11.7	-	10.9	-	10.0	120
128	-	-	3.1	11.1	-	10.2	-	10.2	-	9.4	-	8.5	128
136	-	-	-	-	-	8.9	-	8.9	-	8.0	-	7.1	136
144	-	-	-	-	-	-	-	7.8	-	6.9	-	5.8	144
152	-	-	-	-	-	-	-	-	-	5.8	-	5.0	152
160	-	-	-	-	-	-	-	-	-	5.0	-	4.2	160
168	-	-	-	-	-	-	-	-	-	-	-	3.4	168
176	-	-	-	-	-	-	-	-	-	-	-	2.7	176
1)	5.3	7.1	3.1	4.9	-	2.9	-	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

 23,600 lb		 25.3 ft x 15.4 ft		360° / Max.*								85 %	
 360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft	1,000 lb											ft	
10	173.2	200.7	173.2	195.2	148.5	190.2	131.3	168.3	-	-	-	10	
12	149.5	182.6	135.0	177.9	121.2	173.5	106.2	164.9	94.5	128.9	-	12	
14	118.3	166.5	108.5	163.2	99.2	159.0	88.3	155.4	82.2	128.0	-	14	
16	90.1	151.9	90.9	150.8	83.2	146.7	77.0	143.2	70.7	126.7	65.3	16	
18	71.9	139.3	75.6	140.0	72.0	136.7	68.3	133.3	62.3	124.2	58.6	18	
20	57.0	126.9	61.6	129.1	63.4	126.7	59.6	123.7	56.0	120.2	51.9	20	
24	40.4	102.6	44.4	104.6	47.2	104.8	47.1	103.8	45.3	104.0	42.3	24	
28	30.2	85.2	33.7	87.2	36.4	87.2	36.9	87.1	36.8	82.2	35.1	28	
32	-	-	26.6	72.0	29.1	74.6	29.5	71.1	30.0	67.4	29.3	32	
36	-	-	21.9	59.2	24.1	60.7	24.6	59.6	25.1	56.8	24.7	36	
40	-	-	12.8	43.5	19.8	50.7	20.3	50.7	20.9	48.7	20.5	40	
48	-	-	-	-	14.5	37.9	15.0	37.7	15.4	38.8	15.1	48	
56	-	-	-	-	10.8	29.7	11.3	29.9	11.6	30.0	11.4	56	
64	-	-	-	-	-	-	8.6	23.9	9.0	23.7	8.6	64	
72	-	-	-	-	-	-	6.7	19.3	7.1	19.3	6.7	72	
80	-	-	-	-	-	-	-	-	5.5	16.1	5.3	80	
88	-	-	-	-	-	-	-	-	4.3	13.5	4.0	88	
96	-	-	-	-	-	-	-	-	-	-	2.8	96	
104	-	-	-	-	-	-	-	-	-	-	-	104	
1)	22.9	34.6	13.9	25.1	9.5	19.4	6.4	15.0	4.4	11.9	2.2	1)	

 360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	
ft												ft
1,000 lb												
20	48.2	79.3	-	-	-	-	-	-	-	-	-	20
24	39.4	77.6	36.0	61.6	-	-	-	-	-	-	-	24
28	32.8	68.3	30.1	59.9	27.9	48.6	-	-	-	-	-	28
32	27.8	59.1	25.3	53.8	23.5	48.2	22.3	39.1	-	-	-	32
36	23.8	50.9	21.9	46.4	20.2	42.8	19.2	37.9	17.1	32.0	-	36
40	20.1	43.6	18.8	41.9	17.3	38.3	16.4	36.4	14.5	31.7	12.5	40
48	15.0	35.3	14.0	33.0	12.9	32.3	12.3	30.0	10.6	27.1	8.9	48
56	11.2	28.2	10.6	27.3	9.6	25.6	9.2	24.6	7.6	22.6	6.0	56
64	8.6	23.1	8.0	22.2	7.1	20.5	6.8	19.8	5.5	18.1	3.9	64
72	6.4	19.0	6.0	18.4	5.1	17.3	4.9	16.2	3.6	14.6	-	72
80	5.1	15.6	4.4	15.0	3.5	14.1	3.3	13.7	-	12.0	-	80
88	3.7	12.9	3.1	12.1	-	11.2	-	11.1	-	9.6	-	88
96	-	10.9	-	10.2	-	9.2	-	8.9	-	7.6	-	96
104	-	9.2	-	8.6	-	7.7	-	7.3	-	6.1	-	104
112	-	7.6	-	7.0	-	6.1	-	6.1	-	4.8	-	112
120	-	-	-	5.7	-	4.8	-	4.8	-	3.7	-	120
128	-	-	-	4.6	-	3.9	-	3.9	-	2.8	-	128
136	-	-	-	-	-	3.0	-	3.0	-	-	-	136
144	-	-	-	-	-	-	-	2.2	-	-	-	144
1)	-	7.1	-	4.9	-	2.6	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

 19,000 lb		 25.3 ft x 15.4 ft		360° / Max.*										85%	
		360° 41.0 ft	Max. 41.0 ft	360° 54.5 ft	Max. 54.5 ft	360° 67.9 ft	Max. 67.9 ft	360° 81.4 ft	Max. 81.4 ft	360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft		1,000 lb												ft	
10		171.7	200.7	164.6	195.2	137.5	190.2	121.7	168.3	-	-	-	-	10	
12		142.7	182.6	124.9	177.9	112.4	173.5	98.1	164.9	89.9	128.9	-	-	12	
14		109.6	166.5	101.8	163.2	91.8	159.0	82.7	155.4	76.1	128.0	-	-	14	
16		83.1	151.9	83.9	150.8	76.8	146.7	72.2	143.2	65.9	126.7	61.0	98.3	16	
18		66.2	138.1	69.8	138.8	67.1	136.7	63.1	133.3	58.8	124.2	54.1	97.5	18	
20		52.2	124.5	56.8	126.7	58.7	126.5	55.0	123.5	51.6	119.6	47.7	96.5	20	
24		36.8	100.7	40.7	102.7	43.7	102.8	43.3	101.9	41.6	97.9	38.7	87.8	24	
28		27.3	82.3	30.9	85.0	33.5	84.5	34.0	81.9	33.9	77.2	32.1	70.0	28	
32		-	-	24.1	69.1	26.6	70.0	27.0	67.1	27.7	63.5	26.8	58.5	32	
36		-	-	19.7	56.1	22.0	57.3	22.5	56.6	23.0	53.7	22.6	51.6	36	
40		-	-	11.1	40.5	18.1	48.6	18.5	48.1	19.0	45.8	18.7	44.5	40	
48		-	-	-	-	13.1	35.4	13.5	35.2	13.9	36.2	13.6	33.7	48	
56		-	-	-	-	9.7	27.5	10.1	28.1	10.4	27.3	10.2	27.7	56	
64		-	-	-	-	-	-	7.5	21.8	7.9	21.9	7.7	21.7	64	
72		-	-	-	-	-	-	5.8	17.5	6.0	17.7	5.8	17.5	72	
80		-	-	-	-	-	-	-	-	4.7	14.6	4.4	14.3	80	
88		-	-	-	-	-	-	-	-	3.6	12.3	3.1	11.9	88	
96		-	-	-	-	-	-	-	-	-	-	-	10.1	96	
104		-	-	-	-	-	-	-	-	-	-	-	8.5	104	
1)		20.5	34.6	12.3	25.1	8.4	19.4	5.5	15.0	3.5	11.9	-	9.0	1)	

		360° 121.7 ft	Max. 121.7 ft	360° 135.2 ft	Max. 135.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 162.1 ft	Max. 162.1 ft	360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft	
ft		1,000 lb												ft
20		44.3	79.3	-	-	-	-	-	-	-	-	-	-	20
24		36.2	75.6	32.9	61.6	-	-	-	-	-	-	-	-	24
28		30.1	63.9	27.3	57.5	25.2	48.6	-	-	-	-	-	-	28
32		25.3	55.2	22.9	50.3	21.3	45.7	19.9	39.1	-	-	-	-	32
36		21.7	46.6	19.6	44.3	18.1	40.6	17.0	36.5	15.2	32.0	-	-	36
40		18.3	41.9	16.6	38.5	15.3	37.6	14.5	34.6	12.7	31.4	10.7	23.1	40
48		13.5	32.7	12.3	31.5	11.2	29.7	10.6	28.0	9.1	25.4	7.2	22.1	48
56		9.9	26.6	9.2	24.6	8.2	23.2	7.8	22.3	6.2	20.4	4.7	18.1	56
64		7.5	21.4	6.8	20.2	5.9	18.6	5.5	17.8	4.1	16.0	-	14.2	64
72		5.6	17.3	4.9	16.4	4.0	15.3	3.8	14.6	2.5	12.8	-	10.9	72
80		4.2	13.9	3.5	13.2	-	12.4	-	12.0	-	10.5	-	8.7	80
88		2.9	11.7	-	10.7	-	9.8	-	9.7	-	8.4	-	6.9	88
96		-	9.8	-	9.1	-	8.0	-	7.8	-	6.7	-	5.1	96
104		-	8.1	-	7.5	-	6.6	-	6.2	-	5.0	-	3.7	104
112		-	6.8	-	6.1	-	5.2	-	5.0	-	3.9	-	-	112
120		-	-	-	4.9	-	4.2	-	4.0	-	2.8	-	-	120
128		-	-	-	4.0	-	3.2	-	3.1	-	-	-	-	128
136		-	-	-	-	-	2.4	-	-	-	-	-	-	136
1)		-	6.6	-	4.0	-	-	-	-	-	-	-	-	1)

1) Capacities with horizontal boom



* Max. values are valid only for specific superstructure positions

 8,200 lb		 25.3 ft x 8.4 ft		360° / Max.*								85%	
 360° 41.0 ft	Max. 41.0 ft	 360° 54.5 ft	Max. 54.5 ft	 360° 67.9 ft	Max. 67.9 ft	 360° 81.4 ft	Max. 81.4 ft	 360° 94.8 ft	Max. 94.8 ft	360° 108.3 ft	Max. 108.3 ft		
ft													ft
1,000 lb													
10	53.5	200.7	51.4	195.2	48.5	164.8	44.6	103.3	-	-	-	-	10
12	41.2	182.6	41.6	177.9	40.1	167.2	37.2	104.7	33.1	75.4	-	-	12
14	30.6	166.5	34.2	163.2	33.7	159.0	31.5	106.4	29.3	76.2	-	-	14
16	23.5	151.9	27.5	150.8	28.7	146.7	26.9	108.5	25.2	77.2	22.9	59.0	16
18	18.9	135.5	22.6	136.3	24.6	134.3	23.4	110.8	22.1	76.1	20.1	59.5	18
20	15.0	119.3	18.3	121.4	20.7	120.6	20.3	110.5	19.3	76.3	17.5	59.5	20
24	9.8	93.5	13.0	94.3	15.2	89.9	15.6	82.0	15.2	72.9	13.7	59.3	24
28	6.3	67.4	9.3	71.4	11.4	67.7	11.8	62.3	11.9	58.6	10.7	55.1	28
32	-	-	6.7	52.8	8.6	53.0	9.1	49.5	9.5	48.9	8.4	45.2	32
36	-	-	4.6	42.3	6.8	43.0	7.2	42.3	7.6	40.8	6.6	39.2	36
40	-	-	-	25.6	5.1	35.2	5.5	35.9	6.0	34.9	5.1	33.4	40
48	-	-	-	-	-	25.1	-	25.2	-	25.6	-	24.7	48
56	-	-	-	-	-	18.8	-	18.8	-	19.0	-	18.8	56
64	-	-	-	-	-	-	-	14.9	-	15.3	-	14.6	64
72	-	-	-	-	-	-	-	12.0	-	12.2	-	11.7	72
80	-	-	-	-	-	-	-	-	-	10.0	-	9.4	80
88	-	-	-	-	-	-	-	-	-	8.1	-	7.4	88
96	-	-	-	-	-	-	-	-	-	-	-	6.1	96
104	-	-	-	-	-	-	-	-	-	-	-	5.0	104
1)	3.1	34.6	-	25.1	-	16.5	-	11.9	-	8.4	-	5.5	1)

 360° 121.7 ft	Max. 121.7 ft	 360° 135.2 ft	Max. 135.2 ft	 360° 148.6 ft	Max. 148.6 ft	 360° 162.1 ft	Max. 162.1 ft	 360° 175.5 ft	Max. 175.5 ft	360° 196.2 ft	Max. 196.2 ft		
ft													ft
1,000 lb													
20	16,0	46,8	-	-	-	-	-	-	-	-	-	-	20
24	12,5	47,7	10,5	37,6	-	-	-	-	-	-	-	-	24
28	9,7	47,7	8,0	38,2	-	30,8	-	-	-	-	-	-	28
32	7,5	43,5	5,9	38,9	-	31,2	-	25,1	-	-	-	-	32
36	5,8	37,4	4,4	34,4	-	29,6	-	25,5	-	20,1	-	-	36
40	4,2	31,5	-	29,1	-	27,2	-	25,3	-	20,2	-	15,3	40
48	-	23,5	-	21,5	-	20,3	-	19,5	-	17,8	-	15,0	48
56	-	18,2	-	17,0	-	15,7	-	15,1	-	13,7	-	11,9	56
64	-	14,4	-	13,4	-	12,3	-	11,8	-	10,4	-	8,6	64
72	-	11,3	-	10,6	-	9,7	-	9,1	-	7,8	-	6,0	72
80	-	8,9	-	8,3	-	7,4	-	7,0	-	5,7	-	4,1	80
88	-	7,2	-	6,3	-	5,4	-	5,4	-	4,1	-	-	88
96	-	5,7	-	4,9	-	4,1	-	3,9	-	2,6	-	-	96
104	-	4,4	-	3,7	-	2,8	-	2,8	-	-	-	-	104
112	-	3,5	-	-	-	-	-	-	-	-	-	-	112
1)	-	3.3	-	-	-	-	-	-	-	-	-	-	1)

1) Capacities with horizontal boom

* Max. values are valid only for specific superstructure positions

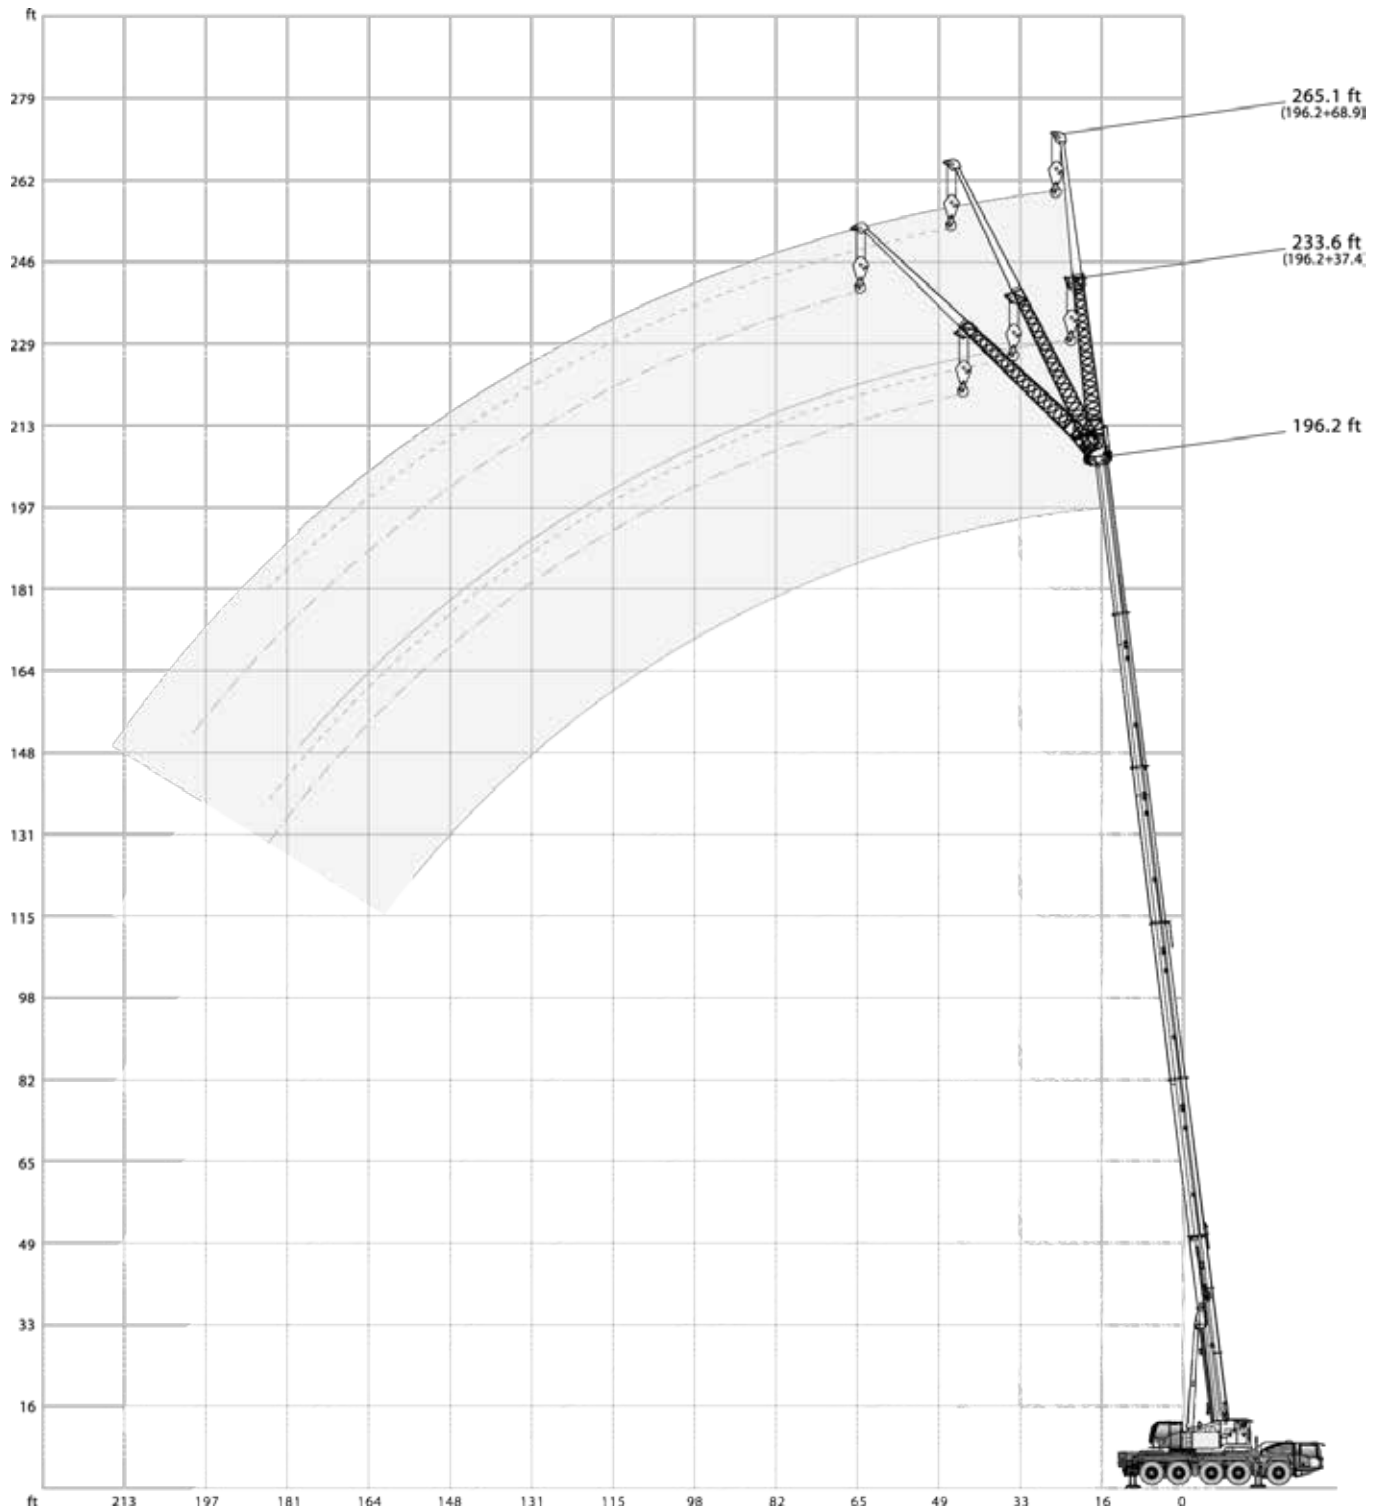

93,000 lb				25.3 ft x 23.0 ft				360°				85 %			
41.0 ft								108.3 ft							
		37.4 ft			68.9 ft					37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°
ft		1,000 lb						ft		1,000 lb					
10		36.6	-	-	22.0	-	-	20		36.6	-	-	-	-	-
12		36.6	-	-	21.8	-	-	24		36.6	-	-	17.0	-	-
14		36.6	-	-	21.7	-	-	28		36.6	-	-	16.9	-	-
16		36.6	-	-	21.4	-	-	32		36.6	-	-	16.6	-	-
18		36.6	-	-	21.2	-	-	36		36.6	-	-	16.3	-	-
20		36.6	34.6	-	20.9	-	-	40		36.5	28.7	-	16.1	-	-
24		36.6	31.9	-	20.4	-	-	48		35.0	26.9	21.2	15.6	-	-
28		36.6	29.5	-	19.7	-	-	56		31.5	25.0	20.4	15.2	12.7	-
32		35.3	27.5	22.5	18.9	-	-	64		28.4	23.3	19.7	14.7	11.8	-
36		32.6	25.8	21.5	17.9	-	-	72		25.8	21.6	19.2	14.3	11.3	-
40		29.9	24.3	20.6	16.8	13.6	-	80		23.8	20.3	18.6	13.8	10.7	9.0
48		25.8	21.7	19.3	14.9	12.3	-	88		22.2	19.3	17.9	13.0	10.2	8.7
56		22.5	19.9	18.6	13.2	11.2	9.7	96		20.7	18.3	17.4	12.1	9.6	8.5
64		19.9	18.9	-	11.7	10.3	9.1	104		18.4	17.5	17.0	11.3	9.3	8.2
72		-	-	-	10.6	9.5	8.6	112		16.0	16.6	16.6	10.8	9.0	8.1
80		-	-	-	9.8	9.0	8.3	120		14.0	14.5	-	10.0	8.8	7.9
88		-	-	-	9.1	8.5	8.2	128		12.7	12.8	-	9.6	8.5	7.9
96		-	-	-	8.5	8.2	-	136		7.6	7.6	-	9.2	8.2	7.9
								144		-	-	-	8.8	8.2	7.9
								152		-	-	-	8.6	8.2	-
								160		-	-	-	8.0	7.9	-

175.5 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		16.1	-	-	-	-	-
48		16.1	-	-	9.0	-	-
56		16.1	-	-	9.0	-	-
64		16.1	16.1	-	9.0	-	-
72		16.1	16.1	-	9.0	-	-
80		16.1	16.0	15.5	9.0	9.0	-
88		15.6	15.1	14.5	9.0	9.0	-
96		14.7	14.1	13.8	9.0	9.0	-
104		13.8	13.3	13.1	9.0	9.0	8.2
112		12.7	12.3	12.3	9.0	9.0	8.1
120		11.9	11.5	11.5	8.8	8.7	7.9
128		10.7	10.8	10.8	8.5	8.3	7.8
136		9.3	9.9	10.1	8.2	7.8	7.6
144		8.4	8.7	9.1	7.7	7.5	7.3
152		7.4	7.8	7.9	6.9	7.0	7.0
160		6.3	6.9	7.2	6.0	6.7	6.5
168		5.3	5.9	6.1	5.3	5.9	6.1
176		4.5	5.0	5.0	4.5	5.1	5.6
184		3.7	4.0	-	3.7	4.5	4.8
192		-	-	-	-	3.8	4.2
200		-	-	-	-	3.0	3.4

196.2 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°*	40°*
ft		1,000 lb					
48		11.7	-	-	-	-	-
56		11.7	-	-	6.6	-	-
64		11.7	-	-	6.6	-	-
72		11.7	11.7	-	6.6	-	-
80		11.7	11.7	11.7	6.6	-	-
88		11.7	11.7	11.7	6.6	7.1	-
96		11.7	11.7	11.7	6.6	7.1	-
104		11.7	11.7	11.7	6.6	7.1	-
112		11.4	11.4	11.4	6.6	7.1	7.1
120		10.7	10.8	10.7	6.6	7.1	7.1
128		10.0	10.0	10.1	6.6	7.1	7.1
136		8.9	9.4	9.4	6.6	7.1	7.1
144		7.6	8.4	8.6	6.6	6.8	6.6
152		6.2	7.1	7.5	6.2	6.5	6.4
160		5.2	5.8	6.3	5.2	6.1	6.1
168		4.2	4.8	5.2	4.2	5.6	5.8
176		3.4	3.9	4.1	3.4	4.7	5.3
184		-	3.1	3.3	-	3.9	4.5
192		-	-	-	-	-	3.6
200		-	-	-	-	-	2.8

 * 191.6 ft

 69,700 lb								 25.3 ft x 23.0 ft								360°								85 %							
 41.0 ft																 108.3 ft															
		37.4 ft			68.9 ft							37.4 ft			68.9 ft																
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°																
ft		1,000 lb																													
10		36.6	-	-	22.0	-	-	20		36.6	-	-	-	-	-																
12		36.6	-	-	21.8	-	-	24		36.6	-	-	17.0	-	-																
14		36.6	-	-	21.7	-	-	28		36.6	-	-	16.9	-	-																
16		36.6	-	-	21.4	-	-	32		36.6	-	-	16.6	-	-																
18		36.6	-	-	21.2	-	-	36		36.6	-	-	16.3	-	-																
20		36.6	34.6	-	20.9	-	-	40		36.5	28.7	-	16.1	-	-																
24		36.6	31.9	-	20.4	-	-	48		35.0	26.9	21.2	15.6	-	-																
28		36.6	29.5	-	19.7	-	-	56		31.5	25.0	20.4	15.2	12.7	-																
32		35.3	27.5	22.5	18.9	-	-	64		28.4	23.3	19.7	14.7	11.8	-																
36		32.6	25.8	21.5	17.9	-	-	72		25.8	21.6	19.2	14.3	11.3	-																
40		29.9	24.3	20.6	16.8	13.6	-	80		22.6	20.3	18.6	13.8	10.7	9.0																
48		25.8	21.7	19.3	14.9	12.3	-	88		19.6	19.2	17.9	13.0	10.2	8.7																
56		22.5	19.9	18.6	13.2	11.2	9.7	96		16.7	17.6	17.2	12.1	9.6	8.5																
64		19.9	18.9	-	11.7	10.3	9.1	104		14.7	15.1	15.6	11.3	9.3	8.2																
72		-	-	-	10.6	9.5	8.6	112		12.9	13.3	12.7	10.8	9.0	8.1																
80		-	-	-	9.8	9.0	8.3	120		11.7	11.9	-	10.0	8.8	7.9																
88		-	-	-	9.1	8.5	8.2	128		10.2	10.6	-	9.5	8.5	7.9																
96		-	-	-	8.5	8.2	-	136		7.6	7.6	-	8.6	8.2	7.9																
								144		-	-	-	7.5	7.9	7.9																
								152		-	-	-	7.2	7.1	-																
								160		-	-	-	6.4	5.0	-																

175.5 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		16.1	-	-	-	-	-
48		16.1	-	-	9.0	-	-
56		16.1	-	-	9.0	-	-
64		16.1	16.1	-	9.0	-	-
72		16.1	16.1	-	9.0	-	-
80		16.1	16.0	15.5	9.0	9.0	-
88		15.6	15.1	14.5	9.0	9.0	-
96		14.5	14.1	13.8	9.0	9.0	-
104		12.4	13.3	13.1	9.0	9.0	8.2
112		10.9	11.6	12.2	9.0	9.0	8.1
120		9.3	10.2	10.4	8.1	8.7	7.9
128		7.7	8.6	9.3	7.3	8.3	7.8
136		6.3	7.1	7.8	6.0	7.4	7.6
144		5.1	6.0	6.5	4.9	6.6	7.3
152		4.1	4.7	5.1	4.1	5.6	6.3
160		3.3	3.9	4.1	3.3	4.5	5.4
168		-	-	-	-	3.5	4.4
176		-	-	-	-	2.6	3.4

196.2 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°*	40°*
ft		1,000 lb					
48		11.7	-	-	-	-	-
56		11.7	-	-	6.6	-	-
64		11.7	-	-	6.6	-	-
72		11.7	11.7	-	6.6	-	-
80		11.7	11.7	11.7	6.6	7.1	-
88		11.7	11.7	11.7	6.6	7.1	-
96		11.7	11.7	11.7	6.6	7.1	-
104		11.3	11.7	11.7	6.6	7.1	-
112		9.6	10.9	11.4	6.6	7.1	7.1
120		7.8	9.1	10.1	6.5	7.1	7.1
128		6.5	7.6	8.4	5.6	6.6	7.1
136		5.3	6.3	6.9	4.4	5.6	7.1
144		4.0	4.9	5.6	3.4	4.5	6.6
152		3.2	3.8	4.3	-	3.7	6.0
160		-	2.8	3.3	-	-	4.7
168		-	-	-	-	-	3.7
176		-	-	-	-	-	2.8



 * 191.6 ft

57,800 lb				25.3 ft x 23.0 ft				360°				85 %			
41.0 ft								108.3 ft							
		37.4 ft			68.9 ft					37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°
ft		1,000 lb						ft		1,000 lb					
10		36.6	-	-	22.0	-	-	20		36.6	-	-	-	-	-
12		36.6	-	-	21.8	-	-	24		36.6	-	-	17.0	-	-
14		36.6	-	-	21.7	-	-	28		36.6	-	-	16.9	-	-
16		36.6	-	-	21.4	-	-	32		36.6	-	-	16.6	-	-
18		36.6	-	-	21.2	-	-	36		36.6	-	-	16.3	-	-
20		36.6	34.6	-	20.9	-	-	40		36.5	28.7	-	16.1	-	-
24		36.6	31.9	-	20.4	-	-	48		35.0	26.9	21.2	15.6	-	-
28		36.6	29.5	-	19.7	-	-	56		31.5	25.0	20.4	15.2	12.7	-
32		35.3	27.5	22.5	18.9	-	-	64		28.0	23.3	19.7	14.7	11.8	-
36		32.6	25.8	21.5	17.9	-	-	72		23.7	21.6	19.2	14.3	11.3	-
40		29.9	24.3	20.6	16.8	13.6	-	80		19.8	20.0	18.6	13.8	10.7	9.0
48		25.8	21.7	19.3	14.9	12.3	-	88		17.1	17.7	17.6	13.0	10.2	8.7
56		22.5	19.9	18.6	13.2	11.2	9.7	96		15.0	15.3	15.6	12.1	9.6	8.5
64		19.9	18.9	-	11.7	10.3	9.1	104		13.1	13.3	13.5	11.3	9.3	8.2
72		-	-	-	10.6	9.5	8.6	112		11.2	11.8	10.2	10.5	9.0	8.1
80		-	-	-	9.8	9.0	8.3	120		9.7	10.0	-	9.3	8.8	7.9
88		-	-	-	9.1	8.5	8.2	128		8.9	9.0	-	8.5	8.5	7.9
96		-	-	-	8.5	8.2	-	136		7.6	7.6	-	7.4	7.6	7.9
								144		-	-	-	6.4	7.1	7.3
								152		-	-	-	5.9	6.1	-
								160		-	-	-	5.3	4.8	-

175.5 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		16.1	-	-	-	-	-
48		16.1	-	-	9.0	-	-
56		16.1	-	-	9.0	-	-
64		16.1	16.1	-	9.0	-	-
72		16.1	16.1	-	9.0	-	-
80		15.9	16.0	15.5	9.0	9.0	-
88		14.1	15.1	14.5	9.0	9.0	-
96		12.3	13.3	13.8	9.0	9.0	-
104		10.2	11.5	12.2	8.5	9.0	8.2
112		8.5	9.6	10.7	7.4	9.0	8.1
120		7.0	8.0	8.8	6.1	7.8	7.9
128		5.6	6.5	7.2	4.8	6.8	7.7
136		4.4	5.2	5.8	3.9	5.6	6.9
144		3.4	4.0	4.5	2.9	4.5	6.0
152		-	3.0	3.4	-	3.6	4.7
160		-	-	-	-	2.8	3.7

196.2 ft							
		37.4 ft			68.9 ft		
		0°	20°	40°	0°	20°*	40°*
ft		1,000 lb					
48		11.7	-	-	-	-	-
56		11.7	-	-	6.6	-	-
64		11.7	-	-	6.6	-	-
72		11.7	11.7	-	6.6	-	-
80		11.7	11.7	11.7	6.6	-	-
88		11.7	11.7	11.7	6.6	7.1	-
96		10.6	11.5	11.7	6.6	7.1	-
104		8.4	10.0	11.1	6.6	7.1	-
112		6.8	8.3	9.4	5.9	7.1	7.1
120		5.4	6.7	7.8	4.4	6.9	7.1
128		4.2	5.3	6.3	3.3	5.8	7.1
136		3.1	4.2	4.9	-	4.7	6.3
144		-	3.1	3.8	-	3.6	5.1
152		-	-	-	-	-	4.0
160		-	-	-	-	-	3.1

 * 191.6 ft

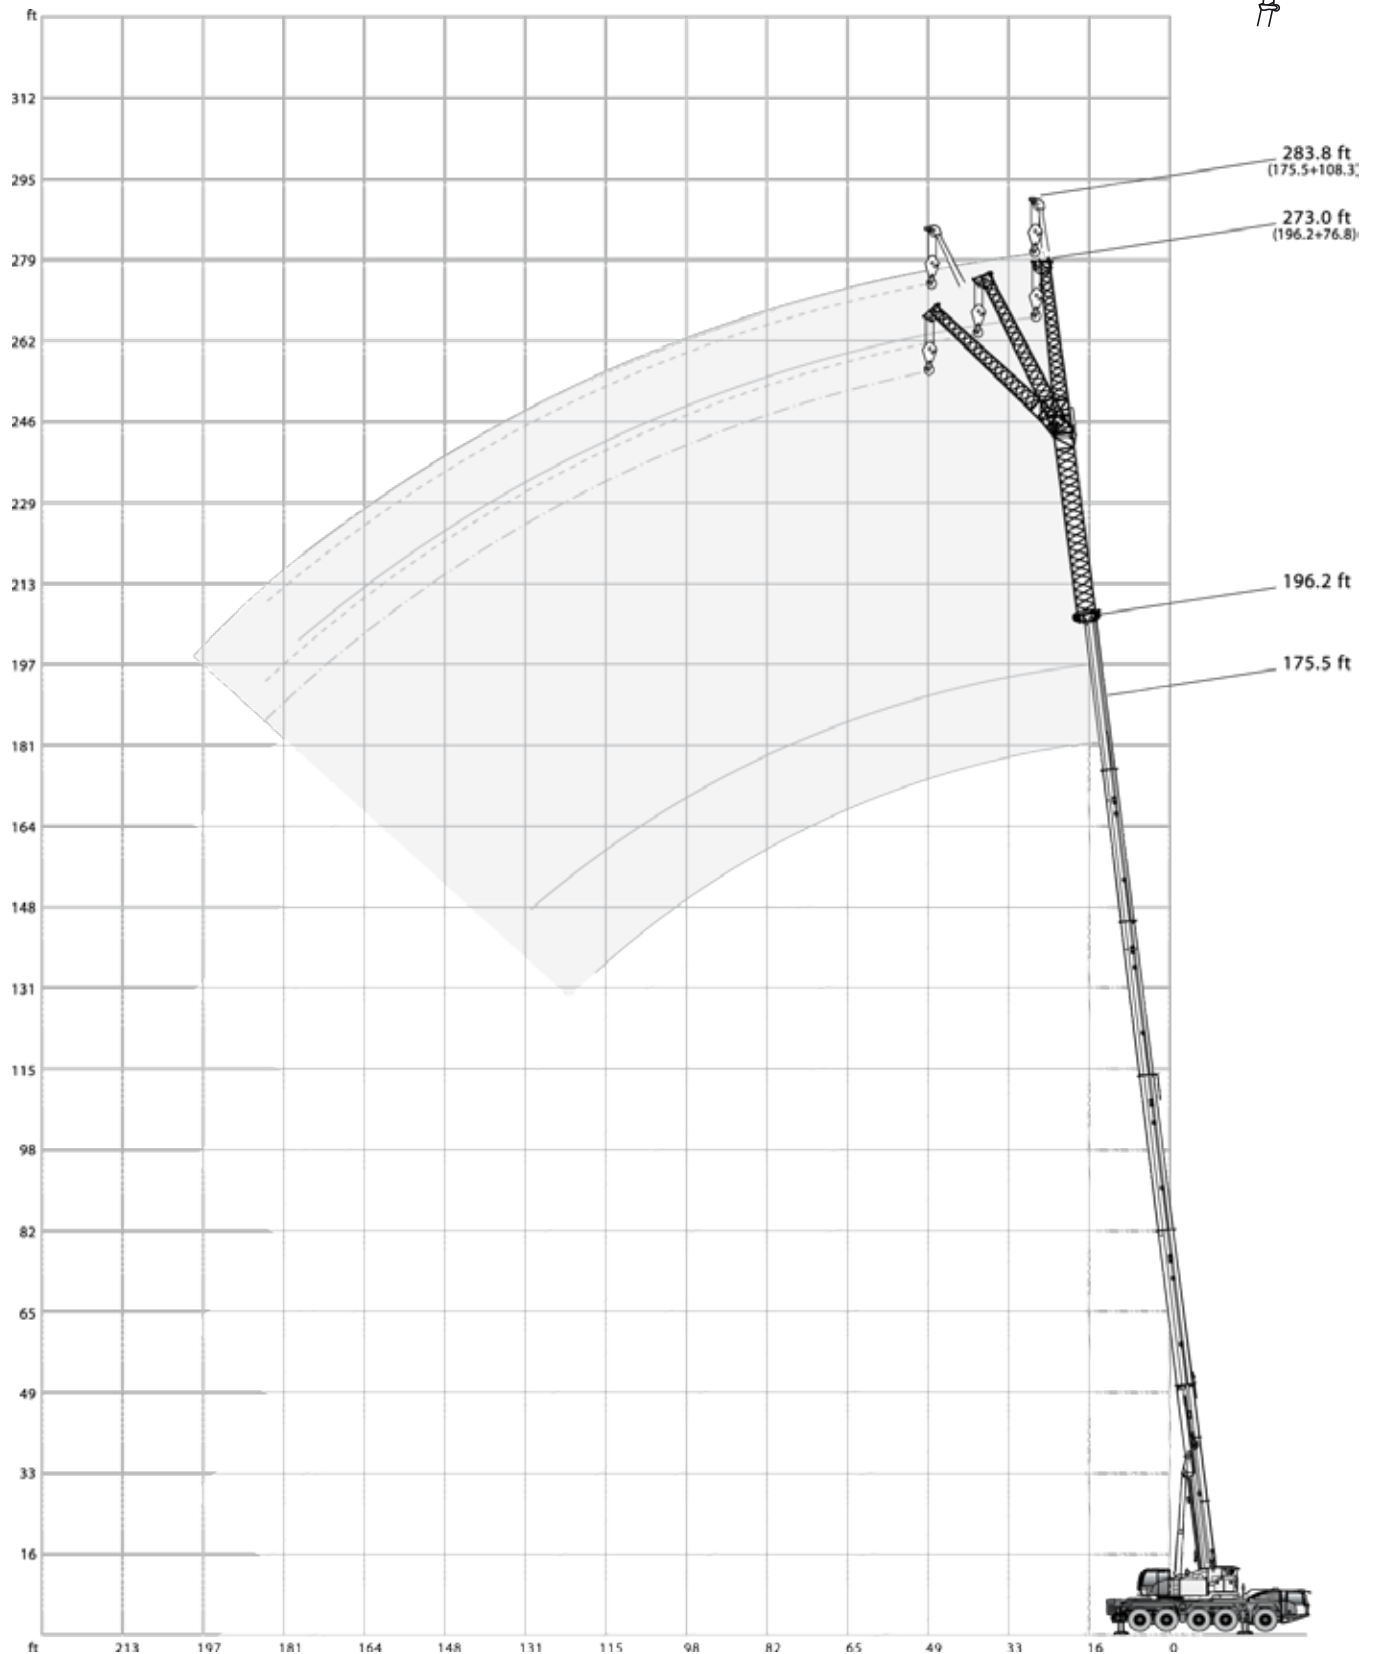

93,000 lb							 25.3 ft x 23.0 ft							360°							85%						
 41.0 ft														 108.3 ft													
  76.8 ft							 108.3 ft							  76.8 ft							 108.3 ft						
0° 20° 40°							0° 20° 40°							0° 20° 40°							0° 20° 40°						
ft							1,000 lb							ft							1,000 lb						
14	36.6	-	-	-	-	-	32	22.3	-	-	-	-	-	-	-	36	22.2	-	-	12.1	-	-					
16	36.6	-	-	-	-	-	40	22.0	-	-	12.1	-	-	-	-	48	21.3	19.0	-	12.1	-	-					
18	35.7	-	-	-	-	-	56	19.9	17.4	-	11.8	-	-	-	-	64	18.4	15.9	14.3	11.5	-	-					
20	34.6	-	-	17.0	-	-	72	17.0	14.6	13.5	11.0	10.2	-	-	-	80	15.4	13.7	12.5	10.5	9.4	-					
24	31.6	-	-	16.7	-	-	88	14.2	12.7	11.9	10.0	8.8	-	-	-	96	13.1	11.9	11.2	9.3	8.1	-					
28	28.6	-	-	16.4	-	-	104	12.2	11.1	10.6	8.7	7.6	-	-	-	112	11.4	10.6	10.1	8.1	7.0	-					
32	25.7	22.3	-	16.1	-	-	120	10.7	10.0	9.6	7.6	6.7	-	-	-	128	10.0	9.5	9.3	7.1	6.3	-					
36	23.5	20.5	-	15.9	-	-	136	9.4	8.9	8.9	6.7	6.0	-	-	-	144	8.8	8.6	8.6	6.2	5.5	-					
40	21.5	19.0	17.5	15.5	-	-	152	8.3	8.1	4.4	5.9	5.3	-	-	-	160	7.7	7.6	-	5.4	5.0	-					
48	18.0	16.4	15.4	14.1	13.0	-	168	3.7	3.6	-	5.2	4.8	-	-	-	176	3.5	3.3	-	4.9	4.6	-					
56	15.4	14.4	13.6	12.5	11.4	-	184	-	-	-	4.7	4.5	-	-	-	192	-	-	-	4.4	-	-					
64	13.6	12.8	12.2	11.1	10.1	-	200	-	-	-	3.6	-	-	-	-												
72	12.2	11.5	11.0	9.7	9.1	-																					
80	10.9	10.4	10.2	8.7	8.0	-																					
88	9.8	9.4	9.4	7.9	7.3	-																					
96	8.8	8.8	-	7.1	6.6	-																					
104	8.2	8.0	-	6.3	6.0	-																					
112	-	-	-	5.7	5.5	-																					
120	-	-	-	5.2	5.2	-																					
128	-	-	-	4.8	4.7	-																					
136	-	-	-	4.5	-	-																					

69,700 lb				25.3 ft x 23.0 ft				360°				85 %			
41.0 ft								108.3 ft							
76.8 ft				108.3 ft				76.8 ft				108.3 ft			
ft	0°	20°	40°	0°	20°	40°	1,000 lb	ft	0°	20°	40°	0°	20°	40°	1,000 lb
14	36.6	-	-	-	-	-	-	32	22.3	-	-	-	-	-	-
16	36.6	-	-	-	-	-	-	36	22.2	-	-	12.1	-	-	-
18	35.7	-	-	-	-	-	-	40	22.0	-	-	12.1	-	-	-
20	34.6	-	-	17.0	-	-	-	48	21.3	19.0	-	12.1	-	-	-
24	31.6	-	-	16.7	-	-	-	56	19.9	17.4	-	11.8	-	-	-
28	28.6	-	-	16.4	-	-	-	64	18.4	15.9	14.3	11.5	-	-	-
32	25.7	22.3	-	16.1	-	-	-	72	17.0	14.6	13.5	11.0	10.2	-	-
36	23.5	20.5	-	15.9	-	-	-	80	15.4	13.7	12.5	10.5	9.4	-	-
40	21.5	19.0	17.5	15.5	-	-	-	88	14.2	12.7	11.9	10.0	8.8	-	-
48	18.0	16.4	15.4	14.1	13.0	-	-	96	13.1	11.9	11.2	9.3	8.1	-	-
56	15.4	14.4	13.6	12.5	11.4	-	-	104	12.2	11.1	10.6	8.7	7.6	-	-
64	13.6	12.8	12.2	11.1	10.1	-	-	112	11.4	10.6	10.1	8.1	7.0	-	-
72	12.2	11.5	11.0	9.7	9.1	-	-	120	10.5	10.0	9.6	7.6	6.7	-	-
80	10.9	10.4	10.2	8.7	8.0	-	-	128	9.3	9.5	9.3	7.1	6.3	-	-
88	9.8	9.4	9.4	7.9	7.3	-	-	136	8.1	8.5	8.7	6.7	6.0	-	-
96	8.8	8.8	-	7.1	6.6	-	-	144	7.1	7.5	7.6	6.2	5.5	-	-
104	8.2	8.0	-	6.3	6.0	-	-	152	6.1	6.5	4.4	5.7	5.3	-	-
112	-	-	-	5.7	5.5	-	-	160	5.7	5.8	-	5.1	5.0	-	-
120	-	-	-	5.2	5.2	-	-	168	3.7	3.6	-	4.5	4.7	-	-
128	-	-	-	4.8	4.7	-	-	176	3.5	3.3	-	3.6	4.2	-	-
136	-	-	-	4.5	-	-	-	184	-	-	-	3.2	3.5	-	-
								192	-	-	-	2.8	-	-	-
								200	-	-	-	2.4	-	-	-

175.5 ft							
76.8 ft				108.3 ft			
ft	0°	20°	40°	0°	20°	40°	1,000 lb
56	8.8	-	-	-	-	-	-
64	8.8	-	-	4.9	-	-	-
72	8.8	-	-	4.9	-	-	-
80	8.8	8.8	7.7	4.9	-	-	-
88	8.8	8.8	7.5	4.9	-	-	-
96	8.8	8.8	7.4	4.9	4.9	-	-
104	8.8	8.8	7.3	4.9	4.9	-	-
112	8.8	8.6	7.0	4.9	4.9	-	-
120	7.6	8.0	6.8	4.9	4.9	-	-
128	6.7	7.3	6.7	4.7	4.9	-	-
136	5.5	6.4	6.6	4.0	4.9	-	-
144	4.5	5.3	6.0	2.9	4.9	-	-
152	3.6	4.5	5.1	-	3.8	-	-
160	2.7	3.5	4.1	-	2.8	-	-

196.2 ft							
76.8 ft							
ft	0°	20°*	40°*				
64	6.0	-	-				
72	6.0	-	-				
80	6.0	6.4	-				
88	6.0	6.4	6.1				
96	6.0	6.4	6.0				
104	6.0	6.4	6.0				
112	6.0	6.4	5.7				
120	5.8	6.4	5.7				
128	5.1	6.3	5.6				
136	4.0	5.5	5.5				
144	2.9	4.5	5.1				
152	-	3.4	4.1				
160	-	-	3.2				



* 191.6 ft

 57,800 lb								 25.3 ft x 23.0 ft								360°								85 %	
 41.0 ft																 108.3 ft									
		76.8 ft			108.3 ft							76.8 ft			108.3 ft										
		0°	20°	40°				0°	20°	40°			0°	20°	40°										
ft		1,000 lb																							
14		36.6	-	-	-	-	-	32		22.3	-	-	-	-	-	-									
16		36.6	-	-	-	-	-	36		22.2	-	-	12.1	-	-	-									
18		35.7	-	-	-	-	-	40		22.0	-	-	12.1	-	-	-									
20		34.6	-	-	17.0	-	-	48		21.3	19.0	-	12.1	-	-	-									
24		31.6	-	-	16.7	-	-	56		19.9	17.4	-	11.8	-	-	-									
28		28.6	-	-	16.4	-	-	64		18.4	15.9	14.3	11.5	-	-	-									
32		25.7	22.3	-	16.1	-	-	72		17.0	14.6	13.5	11.0	10.2	-	-									
36		23.5	20.5	-	15.9	-	-	80		15.4	13.7	12.5	10.5	9.4	-	-									
40		21.5	19.0	17.5	15.5	-	-	88		14.2	12.7	11.9	10.0	8.8	-	-									
48		18.0	16.4	15.4	14.1	13.0	-	96		13.1	11.9	11.2	9.3	8.1	-	-									
56		15.4	14.4	13.6	12.5	11.4	-	104		12.0	11.1	10.6	8.7	7.6	-	-									
64		13.6	12.8	12.2	11.1	10.1	-	112		10.7	10.5	10.1	8.1	7.0	-	-									
72		12.2	11.5	11.0	9.7	9.1	-	120		8.9	9.4	9.5	7.6	6.7	-	-									
80		10.9	10.4	10.2	8.7	8.0	-	128		7.6	8.3	8.6	7.1	6.3	-	-									
88		9.8	9.4	9.4	7.9	7.3	-	136		6.8	6.9	7.4	6.4	6.0	-	-									
96		8.8	8.8	-	7.1	6.6	-	144		6.0	6.4	6.4	5.3	5.5	-	-									
104		8.2	8.0	-	6.3	6.0	-	152		5.0	5.4	4.4	4.6	5.2	-	-									
112		-	-	-	5.7	5.5	-	160		4.5	4.6	-	4.2	4.5	-	-									
120		-	-	-	5.2	5.2	-	168		3.6	3.6	-	3.4	3.8	-	-									
128		-	-	-	4.8	4.7	-	176		3.3	3.3	-	2.7	3.4	-	-									
136		-	-	-	4.5	-	-	184		-	-	-	2.4	2.6	-	-									

175.5 ft						
ft	76.8 ft			108.3 ft		
	0°	20°	40°	0°	20°	40°
56	8.8	-	-	-	-	-
64	8.8	-	-	4.9	-	-
72	8.8	-	-	4.9	-	-
80	8.8	8.8	7.7	4.9	-	-
88	8.8	8.8	7.5	4.9	-	-
96	8.8	8.8	7.4	4.9	4.9	-
104	8.1	8.8	7.3	4.9	4.9	-
112	7.0	7.8	7.0	4.8	4.9	-
120	5.6	6.7	6.8	3.9	4.9	-
128	4.4	5.5	6.2	2.9	4.6	-
136	3.3	4.4	5.2	-	3.8	-
144	2.5	3.4	4.2	-	2.7	-
152	-	-	3.2	-	-	-

 196.2 ft			
 76.8 ft			
	0°	20°*	40°*
ft	1,000 lb		
64	6.0	-	-
72	6.0	-	-
80	6.0	6.4	-
88	6.0	6.4	6.1
96	6.0	6.4	6.0
104	6.0	6.4	6.0
112	5.2	6.4	5.7
120	3.9	5.6	5.7
128	2.9	4.4	5.3
136	-	3.3	4.2
144	-	2.3	3.1

 * 191.6 ft

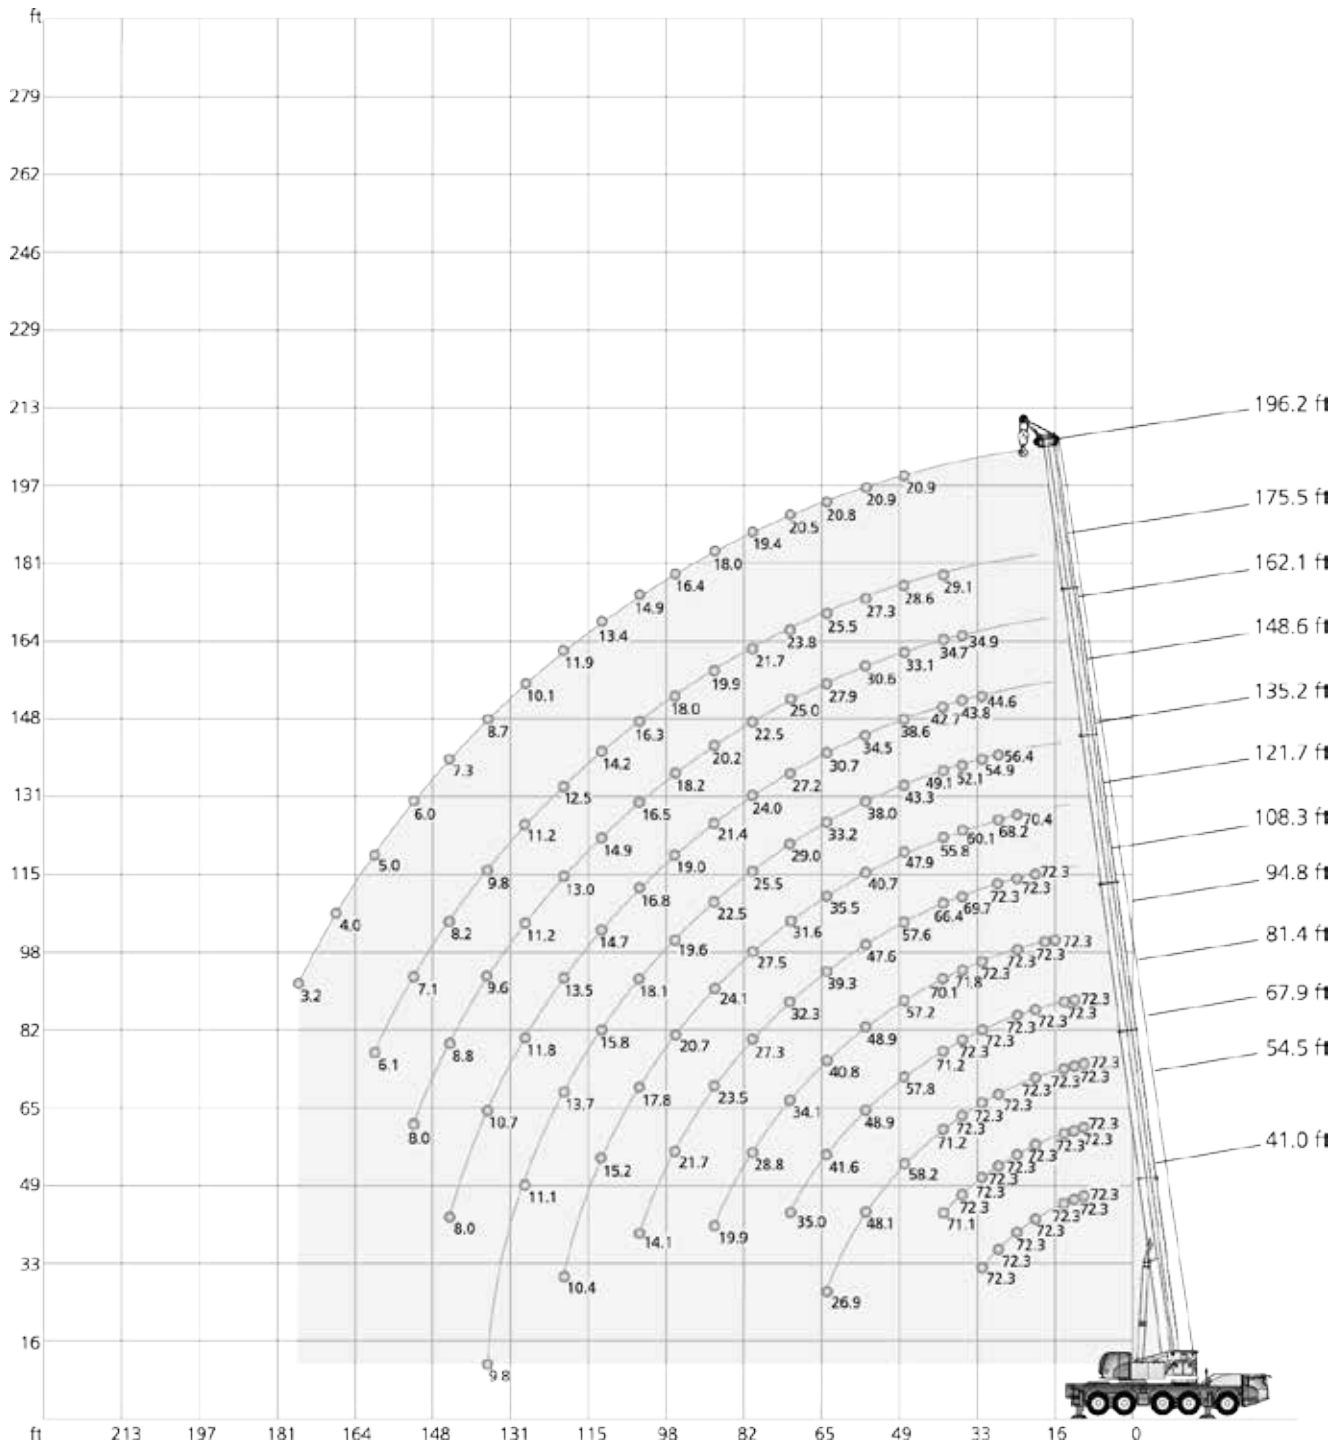

 93,000 lb		 25.3 ft x 23.0 ft		360°		85 %							
 41.0 ft	 54.5 ft	 67.9 ft	 81.4 ft	 94.8 ft	 108.3 ft	 121.7 ft	 135.2 ft	 148.6 ft	 162.1 ft	 175.5 ft	 196.2 ft		
ft	1,000 lb											ft	
10	72.3	72.3	72.3	-	-	-	-	-	-	-	-	10	
12	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	12	
14	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	14	
16	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	16	
18	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	18	
20	72.3	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	20	
24	72.3	72.3	72.3	72.3	72.3	72.3	70.4	-	-	-	-	24	
28	72.3	72.3	72.3	72.3	72.3	72.3	68.2	56.4	-	-	-	28	
32	72.3	72.3	72.3	72.3	72.3	72.3	64.4	54.9	44.6	-	-	32	
36	-	72.3	72.3	72.3	71.8	69.7	60.1	52.1	43.8	34.9	-	36	
40	-	71.1	71.2	71.2	70.1	66.4	55.8	49.1	42.7	34.7	29.1	40	
48	-	-	58.2	57.8	57.2	57.6	47.9	43.3	38.6	33.1	28.6	20.9	48
56	-	-	48.1	48.9	48.9	47.6	40.7	38.0	34.5	30.6	27.3	20.9	56
64	-	-	26.9	41.6	40.8	39.3	35.5	33.2	30.7	27.9	25.5	20.8	64
72	-	-	-	35.0	34.1	32.3	31.6	29.0	27.2	25.0	23.8	20.5	72
80	-	-	-	-	28.8	27.3	27.5	25.5	24.0	22.5	21.7	19.4	80
88	-	-	-	-	19.9	23.5	24.1	22.5	21.4	20.2	19.9	18.0	88
96	-	-	-	-	-	21.7	20.7	19.6	19.0	18.2	18.0	16.4	96
104	-	-	-	-	-	14.1	17.8	18.1	16.8	16.5	16.3	14.9	104
112	-	-	-	-	-	-	15.2	15.8	14.7	14.9	14.2	13.4	112
120	-	-	-	-	-	-	10.4	13.7	13.5	13.0	12.5	11.9	120
128	-	-	-	-	-	-	-	11.1	11.8	11.2	11.2	10.1	128
136	-	-	-	-	-	-	-	9.8	10.7	9.6	9.8	8.7	136
144	-	-	-	-	-	-	-	-	8.0	8.8	8.2	7.3	144
152	-	-	-	-	-	-	-	-	-	8.0	7.1	6.0	152
160	-	-	-	-	-	-	-	-	-	-	6.1	5.0	160
168	-	-	-	-	-	-	-	-	-	-	-	4.0	168
176	-	-	-	-	-	-	-	-	-	-	-	3.2	176
1)	29.8	22.0	17.0	13.2	10.4	7.7	5.7	3.5	-	-	-	-	1)

1) Capacities with horizontal boom

 69,700 lb		 25.3 ft x 23.0 ft		360°		85 %						
  41.0 ft	 54.5 ft	 67.9 ft	 81.4 ft	 94.8 ft	 108.3 ft	 121.7 ft	 135.2 ft	 148.6 ft	 162.1 ft	 175.5 ft	 196.2 ft	
ft	1,000 lb											ft
10	72.3	72.3	72.3	-	-	-	-	-	-	-	-	10
12	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	12
14	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	14
16	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	16
18	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	18
20	72.3	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	20
24	72.3	72.3	72.3	72.3	72.3	72.3	70.4	-	-	-	-	24
28	72.3	72.3	72.3	72.3	72.3	72.3	68.2	56.4	-	-	-	28
32	72.3	72.3	72.3	72.3	72.3	72.3	64.4	54.9	44.6	-	-	32
36	-	70.3	70.4	70.1	69.4	69.7	60.1	52.1	43.8	34.9	-	36
40	-	66.9	67.1	66.4	65.0	65.8	55.8	49.1	42.7	34.7	29.1	40
48	-	-	51.9	52.7	52.4	50.7	47.5	43.3	38.6	33.1	28.6	48
56	-	-	42.1	42.0	41.0	39.3	38.8	36.9	34.5	30.6	27.3	56
64	-	-	24.8	33.9	32.8	31.8	31.8	30.6	29.7	27.9	25.5	64
72	-	-	-	27.9	27.0	27.8	26.4	25.0	25.4	24.8	23.8	72
80	-	-	-	-	23.1	23.4	21.9	22.3	21.2	21.4	21.0	80
88	-	-	-	-	16.0	19.9	19.5	18.8	18.5	18.3	17.8	88
96	-	-	-	-	-	17.1	17.3	15.8	16.3	15.4	15.2	96
104	-	-	-	-	-	13.5	14.8	14.5	14.0	13.9	12.6	104
112	-	-	-	-	-	-	11.2	12.5	11.8	11.8	10.7	112
120	-	-	-	-	-	-	10.4	10.9	10.0	10.0	8.9	120
128	-	-	-	-	-	-	-	9.4	8.5	8.5	7.4	128
136	-	-	-	-	-	-	-	8.2	7.3	7.1	6.0	136
144	-	-	-	-	-	-	-	-	5.6	6.0	4.9	144
152	-	-	-	-	-	-	-	-	-	5.0	3.9	152
160	-	-	-	-	-	-	-	-	-	-	3.1	160
1)	29.8	22.0	17.0	13.2	10.4	7.7	5.7	3.5	-	-	-	1)

1) Capacities with horizontal boom

 57,800 lb		 25.3 ft x 23.0 ft		360°		85%							
 	41.0 ft	54.5 ft	67.9 ft	81.4 ft	94.8 ft	108.3 ft	121.7 ft	135.2 ft	148.6 ft	162.1 ft	175.5 ft	196.2 ft	
ft	1,000 lb												ft
10	72.3	72.3	72.3	-	-	-	-	-	-	-	-	-	10
12	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	-	12
14	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	-	14
16	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	16
18	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	18
20	72.3	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	20
24	72.3	72.3	72.3	72.3	72.3	72.3	70.4	-	-	-	-	-	24
28	72.3	72.3	72.3	72.3	72.3	72.3	68.2	56.4	-	-	-	-	28
32	72.3	72.3	72.3	72.3	72.3	72.3	64.4	54.9	44.6	-	-	-	32
36	-	67.6	67.7	67.2	66.8	66.7	60.1	52.1	43.8	34.9	-	-	36
40	-	61.2	61.5	60.4	62.1	59.6	55.5	49.1	42.7	34.7	29.1	-	40
48	-	-	47.4	47.2	46.1	44.3	43.9	42.1	38.5	33.1	28.6	20.9	48
56	-	-	36.8	36.8	35.7	35.0	34.8	33.7	32.5	30.6	27.3	20.9	56
64	-	-	23.6	29.4	28.4	29.3	28.0	27.5	27.0	26.1	25.5	20.8	64
72	-	-	-	24.1	25.0	24.1	23.4	23.0	22.8	22.4	21.7	20.5	72
80	-	-	-	-	21.1	20.0	20.4	19.1	19.5	18.8	18.4	17.1	80
88	-	-	-	-	14.2	17.5	17.2	17.0	16.2	16.2	15.1	13.9	88
96	-	-	-	-	-	15.5	14.5	14.3	13.5	13.5	12.4	11.3	96
104	-	-	-	-	-	13.4	12.8	12.2	11.3	11.3	10.2	9.1	104
112	-	-	-	-	-	-	11.1	10.3	9.4	9.4	8.3	7.2	112
120	-	-	-	-	-	-	9.4	8.7	7.8	7.8	6.7	5.6	120
128	-	-	-	-	-	-	-	7.3	6.5	6.4	5.3	4.2	128
136	-	-	-	-	-	-	-	6.2	5.3	5.2	4.0	2.9	136
144	-	-	-	-	-	-	-	-	3.6	4.2	3.1	-	144
152	-	-	-	-	-	-	-	-	-	3.2	-	-	152
1)	29.8	22.0	17.0	13.2	10.4	7.7	5.7	3.5	-	-	-	-	1)

1) Capacities with horizontal boom

 23,600 lb		 25.3 ft x 23.0 ft		360°		85%							
  41.0 ft	54.5 ft	67.9 ft	81.4 ft	94.8 ft	108.3 ft	121.7 ft	135.2 ft	148.6 ft	162.1 ft	175.5 ft	196.2 ft		
ft	1,000 lb											ft	
10	72.3	72.3	72.3	-	-	-	-	-	-	-	-	10	
12	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	12	
14	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	14	
16	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	16	
18	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	18	
20	72.3	72.3	72.3	72.3	72.3	72.3	68.3	-	-	-	-	20	
24	72.3	72.3	72.3	72.3	72.3	71.3	58.7	-	-	-	-	24	
28	68.5	70.0	70.1	69.7	67.4	63.8	50.8	53.4	-	-	-	28	
32	56.1	58.6	59.7	60.1	56.4	53.0	43.4	46.5	42.4	-	-	32	
36	-	48.4	50.2	49.9	47.6	46.1	38.3	40.8	37.6	33.1	-	36	
40	-	39.8	40.9	40.7	40.5	40.5	30.0	35.9	34.7	32.6	28.7	40	
48	-	-	30.0	31.0	30.7	29.8	23.4	29.1	27.4	26.2	23.8	20.1	48
56	-	-	23.5	24.0	23.7	23.7	18.3	22.5	21.2	20.5	18.4	16.3	56
64	-	-	18.3	18.8	18.9	18.8	14.4	17.7	16.5	16.0	14.2	12.1	64
72	-	-	-	15.1	15.3	14.9	11.5	13.8	12.6	12.4	10.7	8.7	72
80	-	-	-	-	12.4	12.0	9.1	10.6	9.8	9.8	8.0	6.3	80
88	-	-	-	-	10.1	9.6	7.2	8.3	7.4	7.4	5.8	4.2	88
96	-	-	-	-	-	7.6	5.7	6.4	5.6	5.4	4.2	-	96
104	-	-	-	-	-	6.1	4.3	4.8	3.9	3.9	2.8	-	104
112	-	-	-	-	-	-	3.3	3.5	-	-	-	-	112
120	-	-	-	-	-	-	-	-	-	-	-	-	120
1)	29.8	22.0	17.0	12.3	8.8	5.7	3.5	-	-	-	-	-	1)

 19,000 lb		 25.3 ft x 23.0 ft										360°			85 %	
 	41.0 ft	54.5 ft	67.9 ft	81.4 ft	94.8 ft	108.3 ft	121.7 ft	135.2 ft	148.6 ft	162.1 ft	175.5 ft	196.2 ft				
ft	1,000 lb												ft			
10	72.3	72.3	72.3	-	-	-	-	-	-	-	-	-	10			
12	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	-	12			
14	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	-	14			
16	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	16			
18	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	-	18			
20	72.3	72.3	72.3	72.3	72.3	72.3	-	-	-	-	-	-	20			
24	72.3	72.3	72.3	72.3	71.3	69.9	66.4	-	-	-	-	-	24			
28	66.0	67.4	67.5	67.2	63.5	59.4	56.0	50.3	-	-	-	-	28			
32	51.9	54.4	56.7	56.0	52.3	50.1	47.0	44.7	40.4	-	-	-	32			
36	-	45.4	46.6	46.4	44.2	43.9	40.8	38.8	35.9	31.7	-	-	36			
40	-	36.8	37.9	37.7	39.0	37.3	36.1	35.0	32.6	29.8	27.6	-	40			
48	-	-	28.2	29.0	28.4	28.6	28.4	26.6	24.8	23.8	21.5	19.1	48			
56	-	-	21.6	22.0	22.1	22.0	21.6	20.6	19.0	18.4	16.3	14.2	56			
64	-	-	16.7	17.2	17.4	17.2	16.7	15.9	14.9	14.2	12.2	10.2	64			
72	-	-	-	13.5	13.7	13.3	12.9	12.2	11.1	10.9	8.9	7.1	72			
80	-	-	-	-	11.1	10.6	10.2	9.3	8.4	8.3	6.5	4.7	80			
88	-	-	-	-	8.8	8.4	8.0	7.1	6.2	6.2	4.5	-	88			
96	-	-	-	-	-	6.5	6.1	5.3	4.5	4.5	2.9	-	96			
104	-	-	-	-	-	5.0	4.6	3.7	3.0	2.8	-	-	104			
112	-	-	-	-	-	-	3.5	-	-	-	-	-	112			
1)	29.8	22.0	16.1	11.0	7.7	4.9	2.6	-	-	-	-	-	1)			

1) Capacities with horizontal boom

Ratings are in compliance with ASME B30.5.

Lifting capacities do not exceed 85 % of tipping load.

Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.

Basic machine

Equipment carrier

Engine 368-4	Scania DC13; Diesel engine; 368 kW / 2100 1/min (500 HP), torque 2373 Nm / 1300 1/min; The engine complies with Euromot 4 / Tier 4F; Exhaust system complete stainless steel.
Fuel tank	Fuel tank 127 gallons Diesel (no RME / biodiesel); 16 gallons AdBlue tank.
Transmission AS12INT	ZF AS-Tronic; Automated gearbox with integrated hydraulic retarder, 12 forward speeds and 2 reverse; 2-stage transfer case with switchable longitudinal lock.
Axles 10 x 6 x 10	10 x 6 x 10; Five axles, axles 2, 4, 5 are driven and dispose of a selectable transverse lock; Axle 4 with selectable longitudinal lock; All axles steered.
Suspension	Hydropneumatic suspension with axle load compensation; Hydraulically lockable.
Steering	Dual-circuit steering system with independent rear axle steering; Axles 1, 2, 3 mechanically connected; Axles 4 and 5 electro-hydraulically connected, all axles steered with 6 different steering programs.
Brakes	Pneumatic dual circuit service brake, acting on all wheels; Disc brakes; Hydraulic retarder integrated into transmission as wear-free sustained-action brake; Additional exhaust brake; Parking brake.
Tires size 385/95 R25 (14.00R25)	Tires size 385/95 R25 (14.00R25); Steel rim 9,5-25/1,7"; TechKing ETCRANE 170F or similar.
Cab 2550	Type 8.4 ft; Adjustable driver seat, armrests and pneumatic suspension; Height and tilt-adjustable steering wheel; Auxiliary / passenger seat; Powered door windows; Tinted glass; Central door locking; Electrically adjustable rear-view mirrors, heated; Preparation for radio.
Heating engine-dependent	Engine-dependent warm water heating with 12 kW heating power.
Drive lights	Including low beams, high beams, daytime running lights.
Outriggers	H-4-point design; Vertical and horizontal movement fully hydraulic; Manual or automatic levelling alternatively; 3 outrigger bases: 8.4 ft, 15.4 ft, 23.0 ft.
Outrigger pads 038PA	4 round polyamide outrigger pads A = 1.25 ft ² with transport position at vertical cylinder.
Outrigger basis monitoring	Individual monitoring of horizontal stroke; Deviation warning in crane cab.
Outrigger load indicator	The outrigger load is indicated in the operator cab and the outrigger control box.
Electronic immobilizer system	Prevents uncontrolled carrier mobilization; Incl. 5 ignition keys.
Pneumatic system adapter for inflating tires	Pneumatic system adapter for inflating tires makes it possible for operators to inflate tires by themselves.
Contour safety marking	Continuous reflective strips on the sides of the chassis and on the rear.

Equipment superstructure

Telescopic boom HA60	41.0 ft - 196.2 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 4 sheaves integrated in boom head for max. capacity of 141,800 lb.
Boom luffing	1 luffing cylinder with automatic lowering brake valve.
Rotary drive	Single slewing gear unit with spring-loaded multi-disc brake.
H1	Hoist with spring-loaded multi-disc brake; Resolver (hoist rotation indicator).
Counterweight 69,700 lb	Counterweight 69,700 lb, 6 pieces (a-f); Automatic rigging system.
Control system	Enabling 4 simultaneous working movements; Electric pilot controls via 2 two-axis joysticks; Different control modes selectable for hydraulic circuits.
Operator aids	IC-1, with integrated electronic load moment indicator in accordance with EN 13000; Color display; Displaying of current operating conditions, load charts, fault indicator; Signal lights indicating LMI-load; Crane data logger.
Cab 875	Type 2.87 ft; Tilt infinitely variable 16°; Sliding window rear; Fold-out front window; Extendable side pedestal, front pedestal; Handrails; Tinted safety glass; Pull-down sun visor; Preparation for radio.
Heating engine-independent	Engine-independent warm water heating with 5 kW heating power.
Anemometer	Removable, to be used with all extensions.

Additional equipment

Carrier

Engine 331-3	Scania DC13; Diesel engine; 331 kW / 2100 1/min (450 HP), torque 2007 Nm / 1575 1/min; The engine complies with Euromot 3a / Tier 3; Exhaust system optional with spark arrester.
Axles 10 x 8 x 10	10 x 8 x 10; Five axles, axles 1, 2, 4, 5 are driven and dispose of a selectable transverse lock; Axles 2 and 4 with a disengageable center-differential lock; All axles steered.
Additional fuel tank	Additional fuel tank 37 gallons; For 164 gallons diesel total in carrier (no RME / biodiesel).
Aircondition	Aircondition for carrier cab, 7 kW rated cooling power.

Superstructure

Heavy lift attachment	2 additional sheaves; Dis-/connectable; For total 6 sheaves at boom head; Max. capacity 202,400 lb.
2. hoist (H2)	2. hoist; Spring-loaded multi-disc brake; Integrated resolver (hoist rotation indicator); Incl. quick couplings and transport rack.
Additional counterweight 23,300 lb	Additional counterweight 23,300 lb; 2 pieces; for total 93,000 lb, 8 pieces.
Aircondition	Aircondition in crane cab with 5 kW rated cooling power.

Handling

Remote control	Control of superstructure movements via wireless remote control.
Working range limiter	Displaying and programmability of the work range limits by IC-1.
IC-1 Plus	Smart crane control system for main boom operation enabling higher lifting capacities especially over outriggers. Enables safe use of the full capacity of the crane even in asymmetric outrigger configurations. Outriggers can be positioned independently. Capacity precalculation for +/- 30° slewing angle and radius area. In-cab lift simulation.

Extensions

HAV 36.1 ft	37.4 ft; Lattice swing-away jib, manually offsettable 20°/40°; 1-sheaved head; Incl. transport storage.
HAV 68.9 ft	68.9 ft; Double folding swing-away jib, manually offsettable 20°/40°; 1-sheaved head; Incl. transport storage; Includes HAV 36.1 ft.
HAV-VA 108.3 ft	108.3 ft; Variable extension; Single piece, 39.4 ft lattice boom extension and double folding swing-away jib, manually offsettable 20°/40°; 1-sheaved head; Incl. transport storage for double folding swing-away jib; Includes HAV 36.1 ft, HAV 68.9 ft and HAV-VA 75.5 ft.
HAV-HY	Hydraulic offset 0°-40° instead of manual offset 20°/40°; available for HAV 36.1 ft, HAV 68.9 ft, HAV-VA 108.3 ft.
MS (runner)	5.25 ft; Fixed angle runner; 2 sheaves, for max. 72,300 lb lifting capacity; Incl. transport storage at boom head; Not transportable within 9.0 ft crane width.

Hook Blocks

Hook block 160-7-21-D-1500	160-7-21-D (3310 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 125-5-21-D-1125	125-5-21-D (2480 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 80-3-21-D-850	80-3-21-D (1870 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook block 32-1-21-D-600	32-1-21-D (1320 lb); Hook block with ramshorn hook; white with red signal stripes.
Hook 12-0V-E-350	12-0V-E (770 lb); Single hook with vertical swivel; red.

Further additional equipment on request!

Weight data may deviate from posted values based on road / travel configuration, equipment configuration, and component weight tolerances.

November 2017. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the corresponding Operator's Manual when using our equipment or to otherwise act responsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex, Demag and Above, Ahead, Always are trademarks of or licensed by Terex Corporation or its subsidiaries.

© Terex Cranes 2017

TEREX CRANES GERMANY GMBH

Dinglerstraße 24
66482 Zweibrücken
Germany

E info.cranes@terex.com
T +49 6332 830

www.terex.com/cranes

[linkedin.com/company/demagmobilecranes](https://www.linkedin.com/company/demagmobilecranes)

[facebook.com/TerexCranes](https://www.facebook.com/TerexCranes)

[youtube.com/TerexCranesMarketing](https://www.youtube.com/TerexCranesMarketing)

DEMAG[®]
BY TEREX